

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	3482.5 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	53.9V x 50.9H
	At 50% of Imax	27.6V x 26.5H
	At 90% of Imax	6.8V x 10.5H

Beam Flux	Total	999.2 lumens per klm.
	To 10% of Imax	785.3 lumens per klm.
	To 50% of Imax	397.1 lumens per klm.
	To 90% of Imax	43.5 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.4V I:0.3952A P:29.85W PF:0.6274 Freq:49.99Hz Lamp Flux:1549.31x1 lm		
NAME: SP-PZT-R135-6P-RDM-5	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080070
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

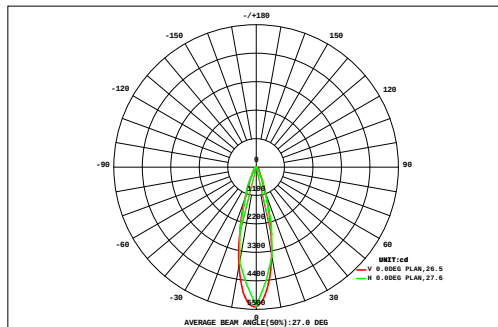

DATA OF LAMP		Eff:51.91lm/W	
MODE	SP-PZT-R135-6P-RDM-5	Imax(cd)	5395
NOMINAL POWER(W)	30	AVAILABILITY(%)	79.1
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	1225
NOMINAL FLUX(lm)	1549.31	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1549
TEST VOLTAGE(V)	120	θ @50%(H,V)	27,28DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
	45	0.27	0.38	0.49	0.60	0.72	0.83	0.93	1.02	1.07	1.09	1.05	0.99	0.89	0.78	0.65	0.51	0.38	0.27	12.9	0.00	
	40	0.36	0.49	0.62	0.76	0.90	1.03	1.17	1.27	1.34	1.34	1.28	1.19	1.05	0.91	0.75	0.58	0.42	0.30	15.8	0.00	
	35	0.38	0.53	0.70	0.90	1.13	1.39	1.69	2.00	2.24	2.30	2.16	1.90	1.60	1.31	1.04	0.79	0.57	0.39	23.0	0.00	
	30	0.48	0.66	0.87	1.12	1.44	1.81	2.24	2.68	2.98	3.00	2.72	2.32	1.90	1.51	1.16	0.87	0.60	0.41	28.8	0.00	
	25	0.48	0.69	0.96	1.33	1.89	2.79	4.11	5.79	7.33	7.78	6.91	5.35	3.78	2.54	1.70	1.17	0.79	0.51	55.9	37.3	
	20	0.60	0.85	1.21	1.73	2.61	4.05	6.20	8.81	10.9	11.0	9.30	6.84	4.56	2.89	1.85	1.22	0.79	0.51	75.9	59.4	
	15	0.55	0.82	1.22	1.88	3.23	5.94	10.6	16.6	21.9	23.6	20.9	15.3	9.36	5.09	2.75	1.60	0.99	0.62	143	130	
		0.65	0.99	1.53	2.56	4.79	9.32	16.8	25.5	31.9	32.6	27.3	18.7	10.6	5.37	2.76	1.55	0.94	0.59	194	182	
		0.56	0.86	1.33	2.20	4.13	8.38	16.1	26.2	34.8	37.8	33.6	24.4	14.5	7.26	3.53	1.85	1.08	0.66	219	208	
		0.65	1.00	1.60	2.88	5.81	12.1	22.5	34.6	42.8	43.3	35.9	24.2	13.3	6.29	3.00	1.58	0.93	0.56	253	242	
		0.50	0.76	1.18	1.90	3.41	6.64	12.6	20.5	27.5	30.3	27.2	19.9	12.0	6.25	3.13	1.67	0.98	0.59	177	165	
	-15	0.54	0.81	1.29	2.13	3.84	7.21	12.5	18.4	22.5	22.7	18.5	12.3	7.01	3.80	2.07	1.21	0.76	0.45	138	125	
	-20	0.39	0.58	0.84	1.25	1.98	3.32	5.56	8.53	11.3	12.7	11.7	8.73	5.55	3.22	1.87	1.13	0.72	0.44	79.8	65.2	
	-25	0.38	0.55	0.77	1.10	1.61	2.20	2.73	3.12	3.34	3.28	2.69	1.92	1.38	1.11	0.91	0.68	0.47	0.29	28.5	9.36	
	-30	0.27	0.40	0.55	0.74	1.01	1.40	1.92	2.54	3.11	3.40	3.21	2.58	1.88	1.32	0.94	0.66	0.45	0.29	26.7	2.13	
	-35	0.25	0.35	0.47	0.59	0.68	0.73	0.72	0.66	0.61	0.58	0.53	0.51	0.56	0.58	0.51	0.40	0.27	0.18	9.17	0.00	
	-40	0.15	0.23	0.32	0.41	0.51	0.61	0.71	0.82	0.90	0.94	0.91	0.83	0.71	0.59	0.47	0.34	0.24	0.15	9.83	0.00	
	-45	0.11	0.17	0.23	0.28	0.32	0.34	0.34	0.32	0.31	0.30	0.33	0.35	0.34	0.30	0.24	0.16	0.12	0.07	4.63	0.00	
-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45			
Φ t	7.57	11.1	16.2	24.4	40.0	70.1	119	179	227	238	206	148	90.9	51.1	29.3	18.0	11.5	7.29	1495	---		
Φ a	0.00	0.00	0.00	0.31	17.0	53.2	105	167	214	225	194	136	77.8	32.8	3.60	0.00	0.00	0.00	---	1225		

one-half-peak spread: U:13.5,D:14.3 , L:13.6,R:13.1


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.4V I:0.3952A P:29.85W PF:0.6274 Freq:49.99Hz Lamp Flux:1549.31x1 lm		
NAME: SP-PZT-R135-6P-RDM-5	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080070
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

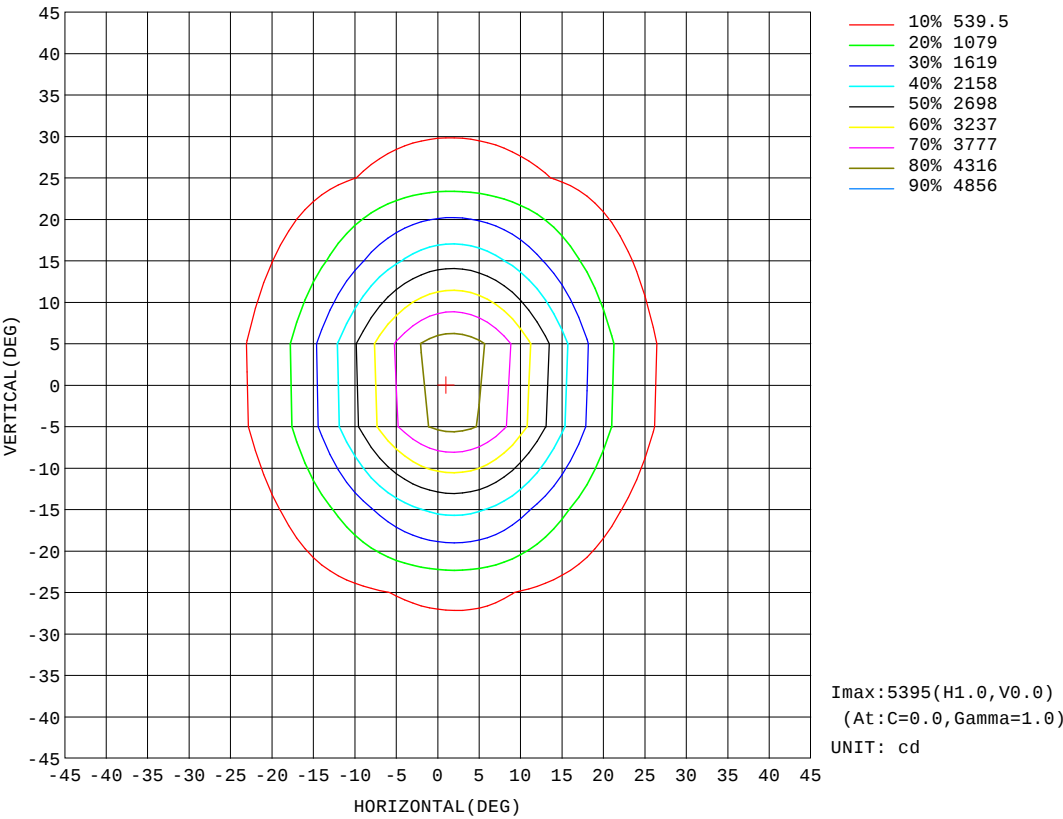


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.4V I:0.3952A P:29.85W PF:0.6274 Freq:49.99Hz Lamp Flux:1549.31x1 lm		
NAME: SP-PZT-R135-6P-RDM-5	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080070
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

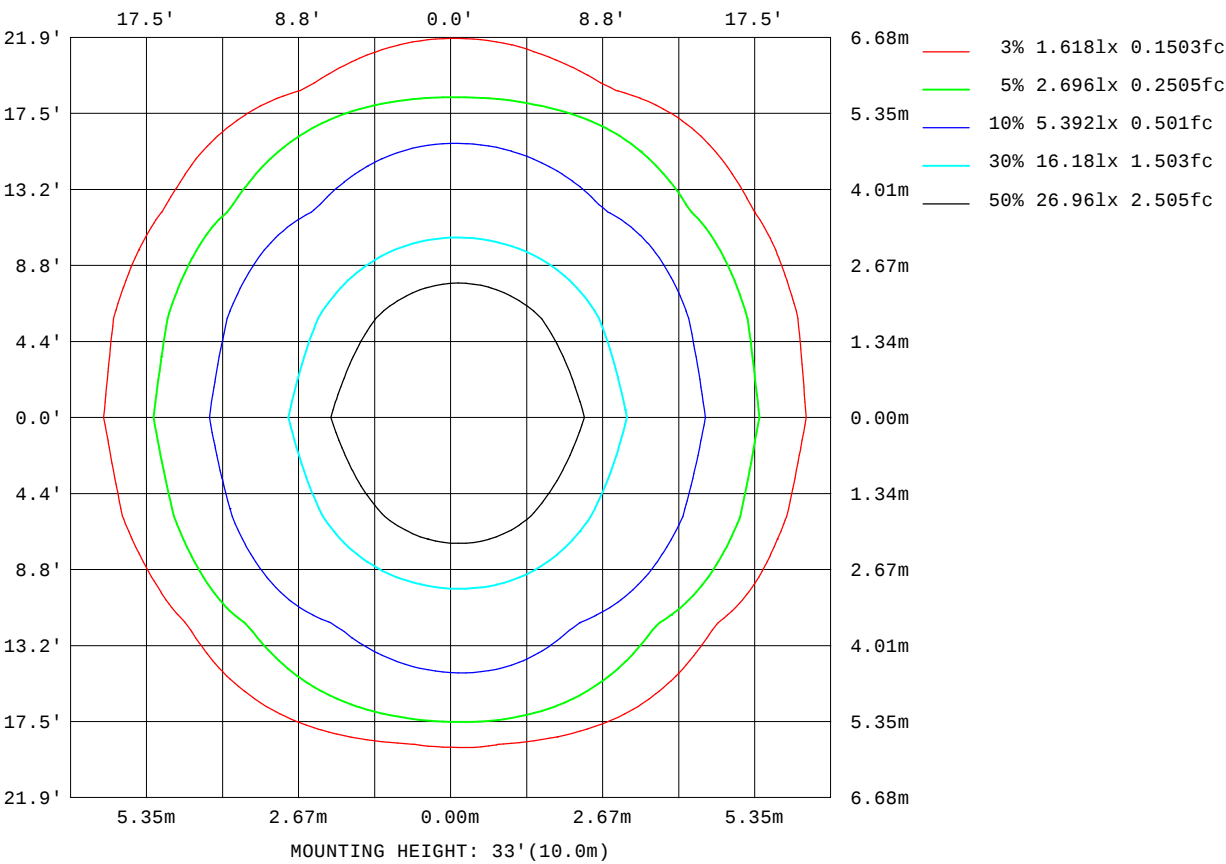

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

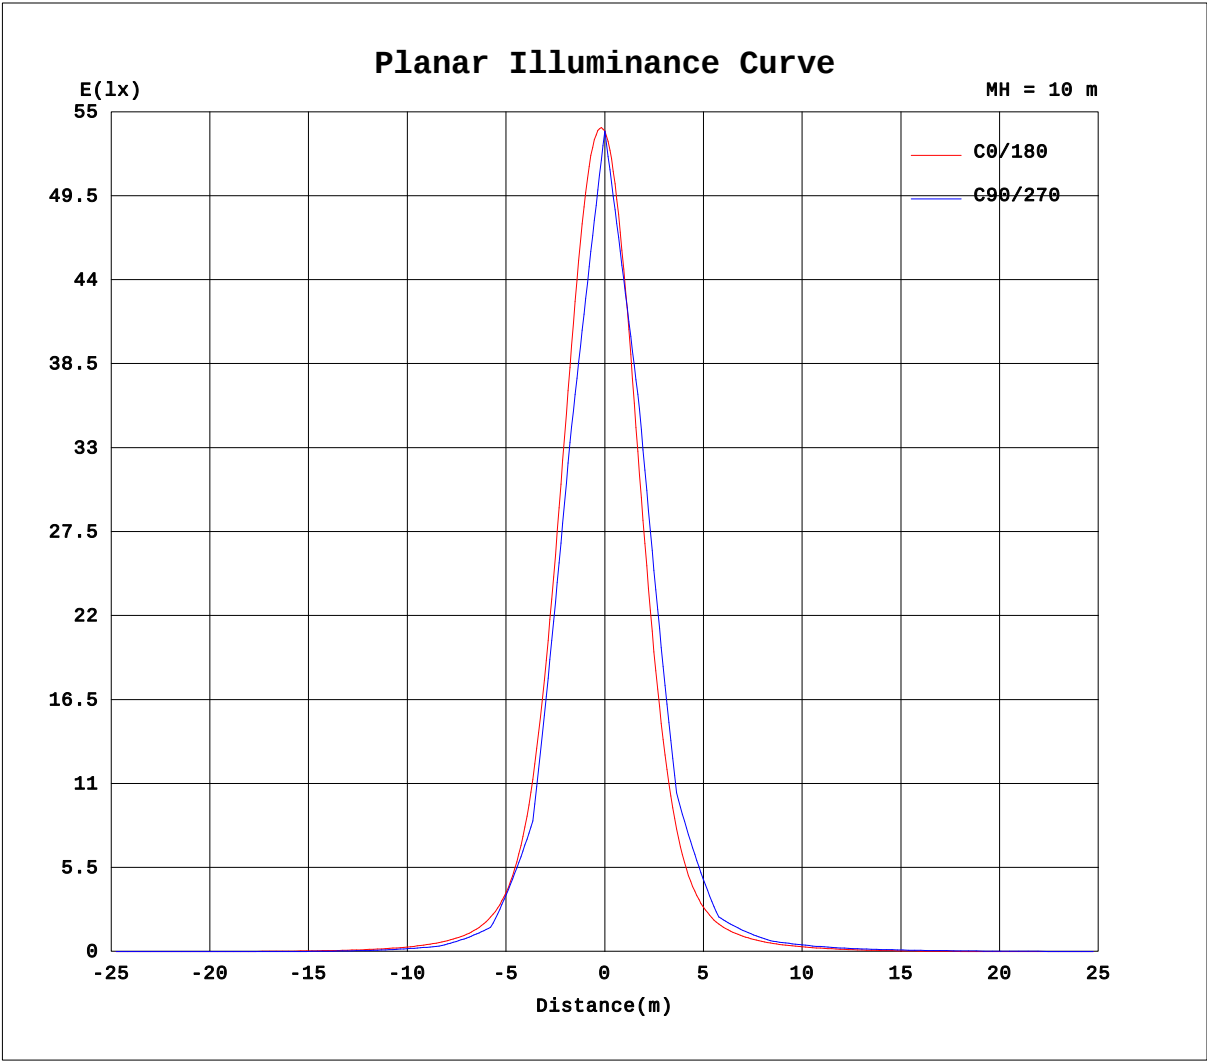


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.4V I:0.3952A P:29.85W PF:0.6274 Freq:49.99Hz Lamp Flux:1549.31x1 lm		
NAME: SP-PZT-R135-6P-RDM-5	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080070
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

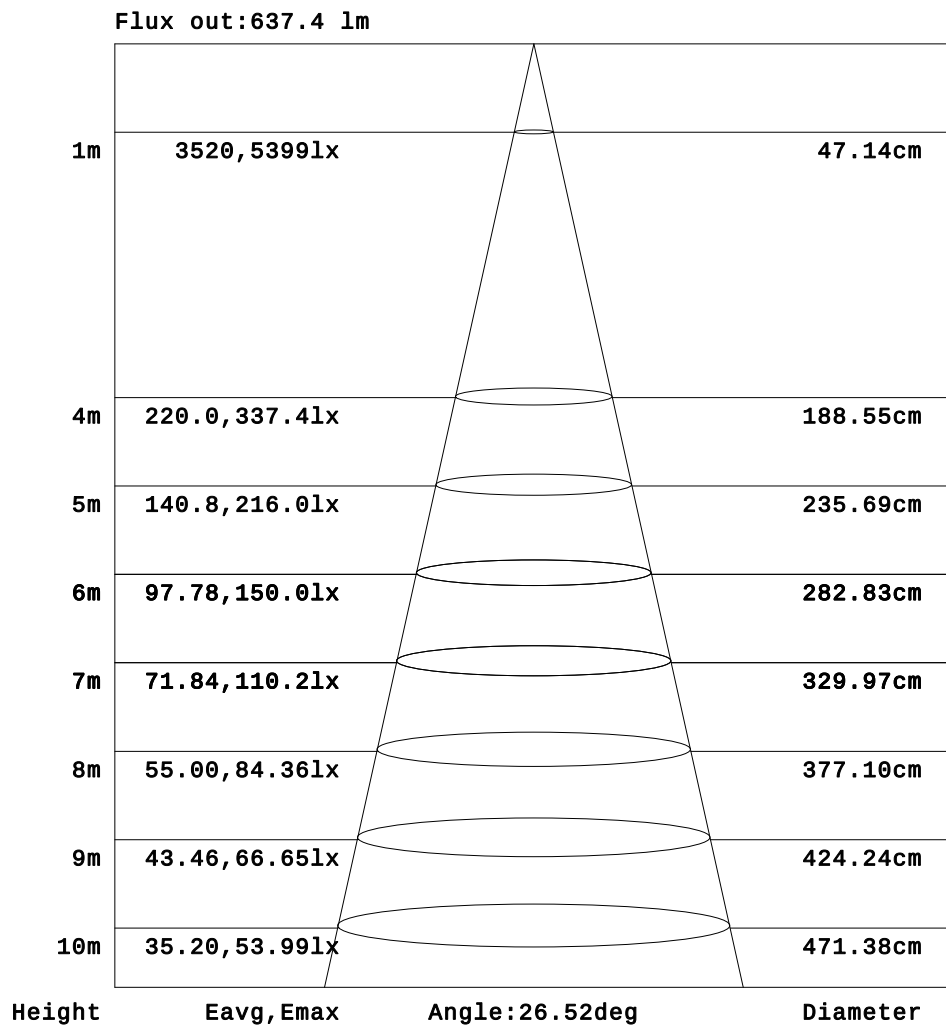

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.4V I:0.3952A P:29.85W PF:0.6274 Freq:49.99Hz Lamp Flux:1549.31x1 lm		
NAME: SP-PZT-R135-6P-RDM-5	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080070
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd		
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.27	0.41
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.62	0.83
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.07	4.54	7.29	9.80	11.8	13.1	14.2	15.2	15.8
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.45	5.08	10.2	15.7	20.5	24.2	26.7	28.8	30.1	30.8
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.50	4.26	8.53	15.6	23.2	30.7	37.5	43.3	47.8	51.2	53.9	55.6
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.42	10.1	18.9	29.0	39.2	48.6	57.0	64.4	70.3	74.8	78.5	80.9
-35	0.00	0.00	0.00	0.00	0.00	0.00	1.63	6.90	16.2	27.3	39.9	53.2	67.3	82.4	99.1	118	137	154	163
-30	0.00	0.00	0.00	0.00	0.00	0.00	5.19	14.8	26.4	40.5	55.9	72.8	91.8	114	141	173	206	234	247
-25	0.00	0.00	0.00	0.00	0.00	0.34	6.82	17.7	31.3	47.4	65.5	87.3	116	158	224	317	437	558	636
-20	0.00	0.00	0.00	0.00	0.00	2.33	12.5	25.6	42.2	61.2	83.1	112	153	224	340	507	718	923	1038
-15	0.00	0.00	0.00	0.00	0.00	2.06	12.9	26.7	44.5	65.7	92.1	127	185	286	486	847	1370	1910	2246
-10	0.00	0.00	0.00	0.00	0.00	5.62	18.1	34.5	54.6	79.9	113	162	247	408	748	1377	2247	3079	3503
-5	0.00	0.00	0.00	0.00	0.00	4.60	17.3	33.9	55.4	81.1	114	164	247	415	783	1510	2597	3734	4404
0	0.00	0.00	0.00	0.00	0.00	8.17	22.4	41.2	65.7	93.9	131	192	295	527	1042	2028	3417	4756	5388
5	0.00	0.00	0.00	0.00	0.00	5.78	19.5	37.9	61.1	87.5	122	174	257	429	805	1545	2653	3825	4518
10	0.00	0.00	0.00	0.00	0.00	8.28	23.0	43.3	66.6	93.1	130	183	268	438	795	1453	2373	3274	3735
15	0.00	0.00	0.00	0.00	0.00	5.18	19.0	37.8	59.3	83.2	114	156	217	323	534	917	1482	2091	2470
20	0.00	0.00	0.00	0.00	0.00	6.94	21.6	40.7	60.9	84.3	114	149	198	271	394	584	843	1115	1256
25	0.00	0.00	0.00	0.00	0.00	2.80	15.8	32.9	51.2	71.5	96.2	124	159	207	281	388	534	695	798
30	0.00	0.00	0.00	0.00	0.00	3.14	16.2	32.4	49.1	67.9	89.5	112	137	168	203	244	290	332	351
35	0.00	0.00	0.00	0.00	0.00	0.52	9.98	24.4	39.2	55.2	73.8	92.5	112	133	158	184	213	240	255
40	0.00	0.00	0.00	0.00	0.00	0.00	9.22	22.2	35.3	49.7	65.6	80.6	94.8	109	122	136	148	156	160
45	0.00	0.00	0.00	0.00	0.00	0.00	3.37	13.8	25.2	37.1	50.6	63.8	75.9	87.1	97.6	107	116	123	126
50	0.00	0.00	0.00	0.00	0.00	0.00	0.52	10.0	19.7	29.6	41.0	52.0	61.5	69.7	76.7	82.7	87.5	90.8	91.9
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.03	10.7	18.8	27.7	37.1	45.5	52.6	58.6	63.6	67.5	70.2	71.4
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.89	11.3	18.3	25.7	32.4	38.1	42.6	46.2	48.8	50.4	50.8
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.80	5.01	8.41	12.9	18.4	23.1	27.0	30.0	32.2	33.5	33.9
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.29	6.34	9.87	12.7	14.9	16.2	16.9	16.9
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.75	2.77	4.60	6.11	7.25	8.00	8.43	8.46
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-08

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.4V I:0.3952A P:29.85W PF:0.6274 Freq:49.99Hz Lamp Flux:1549.31x1 lm		
NAME: SP-PZT-R135-6P-RDM-5	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080070
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	15.7	15.0	13.6	10.9	8.43	6.27	3.96	1.55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	30.7	29.7	26.2	20.8	16.0	11.6	6.95	2.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	56.1	55.2	51.2	45.1	37.7	29.4	21.2	14.1	7.86	3.58	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	81.4	79.6	73.9	66.5	56.3	43.7	32.5	23.3	13.9	5.64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	162	147	127	108	89.3	70.9	53.3	37.8	25.7	15.6	6.92	1.34	0.00	0.00	0.00	0.00	0.00	0.00
-30	238	207	172	141	115	90.7	67.3	47.1	33.3	22.0	11.2	0.86	0.00	0.00	0.00	0.00	0.00	0.00
-25	628	519	377	261	183	133	95.8	66.5	45.3	30.3	18.0	6.86	0.36	0.00	0.00	0.00	0.00	0.00
-20	989	775	530	344	228	158	111	76.0	50.6	33.5	20.0	8.98	0.01	0.00	0.00	0.00	0.00	0.00
-15	2199	1758	1171	690	393	233	151	101	65.3	42.9	26.6	13.5	2.92	0.00	0.00	0.00	0.00	0.00
-10	3286	2510	1594	888	478	266	168	110	69.2	45.0	27.5	13.5	3.12	0.00	0.00	0.00	0.00	0.00
-5	4287	3416	2237	1237	630	334	200	130	83.7	53.8	33.1	17.5	5.72	0.00	0.00	0.00	0.00	0.00
0	5043	3865	2430	1271	626	331	197	128	83.6	53.0	31.8	16.2	4.36	0.00	0.00	0.00	0.00	0.00
5	4398	3520	2319	1282	651	351	211	138	91.7	60.4	36.7	19.5	6.46	0.00	0.00	0.00	0.00	0.00
10	3504	2713	1744	965	515	296	189	126	85.3	57.4	33.8	17.1	4.39	0.00	0.00	0.00	0.00	0.00
15	2404	1944	1330	795	457	279	184	124	85.8	59.5	36.5	18.7	5.60	0.00	0.00	0.00	0.00	0.00
20	1170	937	676	458	307	214	151	105	74.4	52.3	30.9	14.5	2.49	0.00	0.00	0.00	0.00	0.00
25	773	649	497	361	259	189	140	99.2	71.5	51.4	31.8	15.0	3.08	0.00	0.00	0.00	0.00	0.00
30	339	302	260	217	178	143	111	80.5	59.8	42.8	24.9	10.2	0.31	0.00	0.00	0.00	0.00	0.00
35	251	231	205	177	150	123	97.2	72.5	54.3	39.1	23.2	9.15	0.78	0.00	0.00	0.00	0.00	0.00
40	158	151	140	126	111	92.7	73.5	56.2	42.4	29.3	15.0	3.65	0.00	0.00	0.00	0.00	0.00	0.00
45	125	121	113	103	91.6	77.6	62.4	47.9	35.9	24.5	12.2	2.80	0.00	0.00	0.00	0.00	0.00	0.00
50	91.1	88.3	83.2	76.2	67.0	56.5	45.0	34.5	24.9	15.0	4.56	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	70.9	68.6	64.6	59.1	52.0	43.5	34.3	25.8	17.7	9.43	3.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	50.0	47.7	44.1	39.3	33.8	26.9	20.1	13.8	7.37	0.55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	33.3	31.7	29.0	25.4	20.9	15.9	10.8	7.53	4.36	0.91	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	16.1	14.8	12.7	9.81	6.15	2.72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	8.15	7.54	6.59	5.23	3.44	1.70	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: