

LED Test Report

Product Mark

Product Type :SP-PZT-R135-6P-RDM-5

Temperature :22.5'C

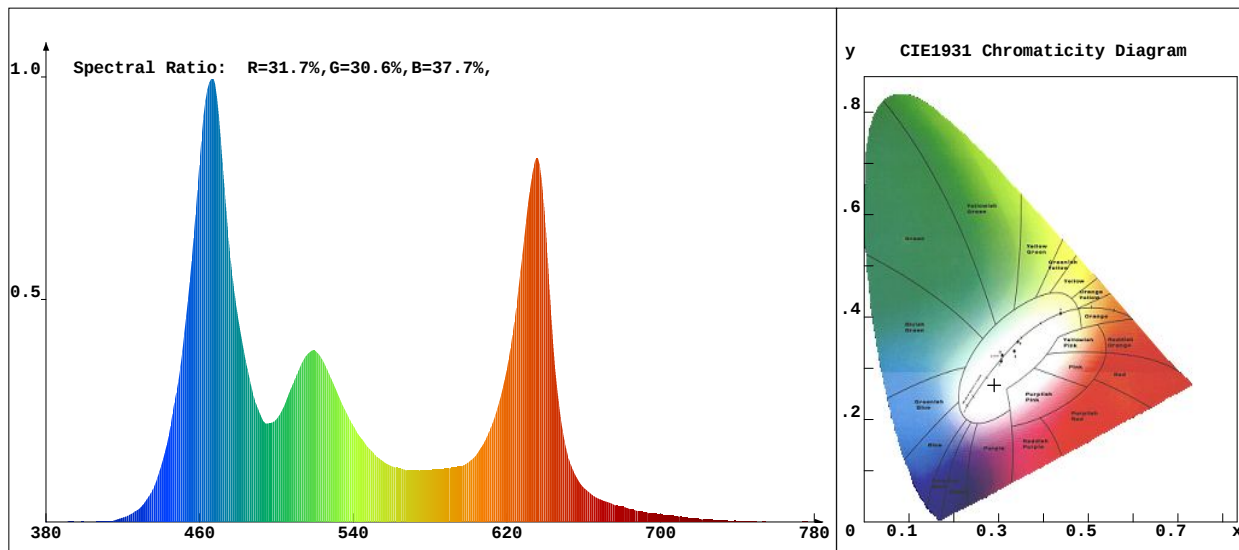
Operator :qc1

Remark:SP-PZT-R135-6P-RDM-5

Manufacturer :TPK

Humidity :42%

Test Date :2025-08-08 13:46:03

**Chroma Parameters**

Chro.Coar.:x=0.2906 y=0.2671 u=0.2067 v=0.2850 duv=-0.0184

CCT:10134K Dominant Wave.:462.3nm Purity:22.1%

Flux RGB Ratio:R=24.3%,G=66.2%,B=9.5% Peak Wave:466.7nm Half Width:24.7nm

Rendering Index:Ra= 39.8

R1 =20 R2 =48 R3 =79 R4 =37 R5 =34 R6 =43 R7 =61 R8 =-4

R9 =-201 R10=-14 R11=27 R12=37 R13=24 R14=85 R15=3

Photo Parameters

Flux:1063.61lm

Effi.:37.8lm/W

Radiant:4501.3mW

Iv:0.0mcd

Efficiency:0.348

Effi Level:B (EU 874-2012)

Ele. Parameters

Voltage:U=120.200V

Current:I=0.3850A

Power:P=28.12W

Power Factor:PF=0.606

Instrument state

Instrument:Hopoo HP8000S

Integral Time: 40.599ms

VPeak: 13561

VDark: 1293

Scan Range: 380-780nm

Product ID: 201605038