

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	2077.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	71.4V x 70.4H
	At 50% of Imax	35.7V x 34.9H
	At 90% of Imax	12.6V x 13.0H

Beam Flux	Total	999.0 lumens per klm.
	To 10% of Imax	865.5 lumens per klm.
	To 50% of Imax	430.6 lumens per klm.
	To 90% of Imax	63.1 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.3V I:0.2544A P:18.25W PF:0.5965 Freq:50.00Hz Lamp Flux:834.363x1 lm		
NAME: SP-PZT-R110-3P-RDM-1	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080045
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

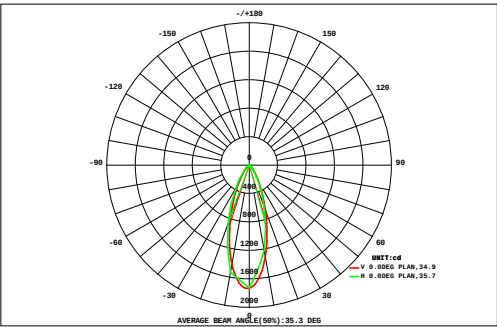

DATA OF LAMP		Eff:45.72lm/W	
MODE	SP-PZT-R110-3P-RDM-1	Imax(cd)	1734
NOMINAL POWER(W)	18	AVAILABILITY(%)	86.7
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	723.6
NOMINAL FLUX(lm)	834.363	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	834.4
TEST VOLTAGE(V)	120	θ @50%(H,V)	35,36DEG

AREA FLUX DIAGRAM																	UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	72	0.00	0.00	0.00	0.00	0.01	0.01	0.03	0.06	0.09	0.10	0.09	0.06	0.02	0.01	0.00	0.00	0.00	0.48	0.00	
	64	0.00	0.00	0.00	0.01	0.09	0.20	0.29	0.36	0.40	0.42	0.39	0.33	0.26	0.16	0.06	0.00	0.00	0.00	2.97	0.00
	56	0.00	0.00	0.01	0.09	0.25	0.43	0.61	0.76	0.87	0.89	0.83	0.69	0.52	0.35	0.19	0.06	0.00	0.00	6.55	0.00
	48	0.00	0.00	0.04	0.21	0.46	0.77	1.15	1.55	1.84	1.90	1.71	1.35	0.94	0.60	0.34	0.14	0.02	0.00	13.0	0.00
	40	0.00	0.00	0.12	0.36	0.75	1.34	2.20	3.17	3.91	4.04	3.48	2.54	1.62	0.94	0.49	0.21	0.04	0.00	25.2	9.16
	32	0.00	0.02	0.18	0.51	1.14	2.27	4.06	6.28	8.05	8.32	6.85	4.65	2.73	1.43	0.69	0.30	0.07	0.00	47.6	39.1
	24	0.00	0.03	0.22	0.67	1.62	3.52	6.99	11.9	16.0	16.7	13.3	8.31	4.42	2.10	0.92	0.37	0.10	0.00	87.1	80.5
		0.00	0.04	0.24	0.75	1.97	4.60	9.80	17.7	25.0	26.4	20.7	12.5	6.22	2.76	1.14	0.43	0.12	0.00	130	125
		0.00	0.04	0.25	0.80	2.18	5.27	11.6	21.3	30.6	32.4	25.1	14.9	7.19	3.07	1.22	0.44	0.12	0.01	156	151
		0.00	0.04	0.25	0.80	2.20	5.36	11.6	21.1	29.7	30.8	23.4	13.7	6.57	2.81	1.11	0.39	0.10	0.00	150	145
		0.00	0.02	0.19	0.61	1.70	4.01	8.30	14.5	20.0	21.1	16.7	10.3	5.21	2.33	0.95	0.33	0.08	0.00	106	101
	-24	0.00	0.00	0.12	0.40	1.06	2.45	4.74	7.90	10.7	11.4	9.47	6.30	3.48	1.67	0.70	0.25	0.05	0.00	60.7	53.5
-32	0.00	0.00	0.04	0.23	0.62	1.35	2.54	4.01	5.21	5.51	4.75	3.37	2.02	1.03	0.45	0.16	0.02	0.00	31.3	20.5	
-40	0.00	0.00	0.01	0.08	0.27	0.60	1.09	1.60	1.96	2.05	1.83	1.40	0.90	0.48	0.21	0.05	0.00	0.00	12.5	0.00	
-48	0.00	0.00	0.00	0.00	0.05	0.17	0.30	0.44	0.55	0.60	0.53	0.38	0.24	0.13	0.04	0.00	0.00	0.00	3.43	0.00	
-56	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.07	0.08	0.08	0.05	0.02	0.01	0.01	0.00	0.00	0.00	0.37	0.00	
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.00	
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)					16	24	32	40	48	56	64	72
Φ t	0.00	0.19	1.66	5.54	14.4	32.4	65.3	113	155	163	129	80.8	42.4	19.9	8.52	3.14	0.74	0.02	834	---	
Φ a	0.00	0.00	0.00	0.00	1.54	22.4	57.5	105	147	155	122	73.9	33.2	6.55	0.00	0.00	0.00	0.00	---	724	


one-half-peak spread: U:15.6,D:20.4 , L:17.7,R:17.5 NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.3V I:0.2544A P:18.25W PF:0.5965 Freq:50.00Hz Lamp Flux:834.363x1 lm		
NAME: SP-PZT-R110-3P-RDM-1	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080045
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

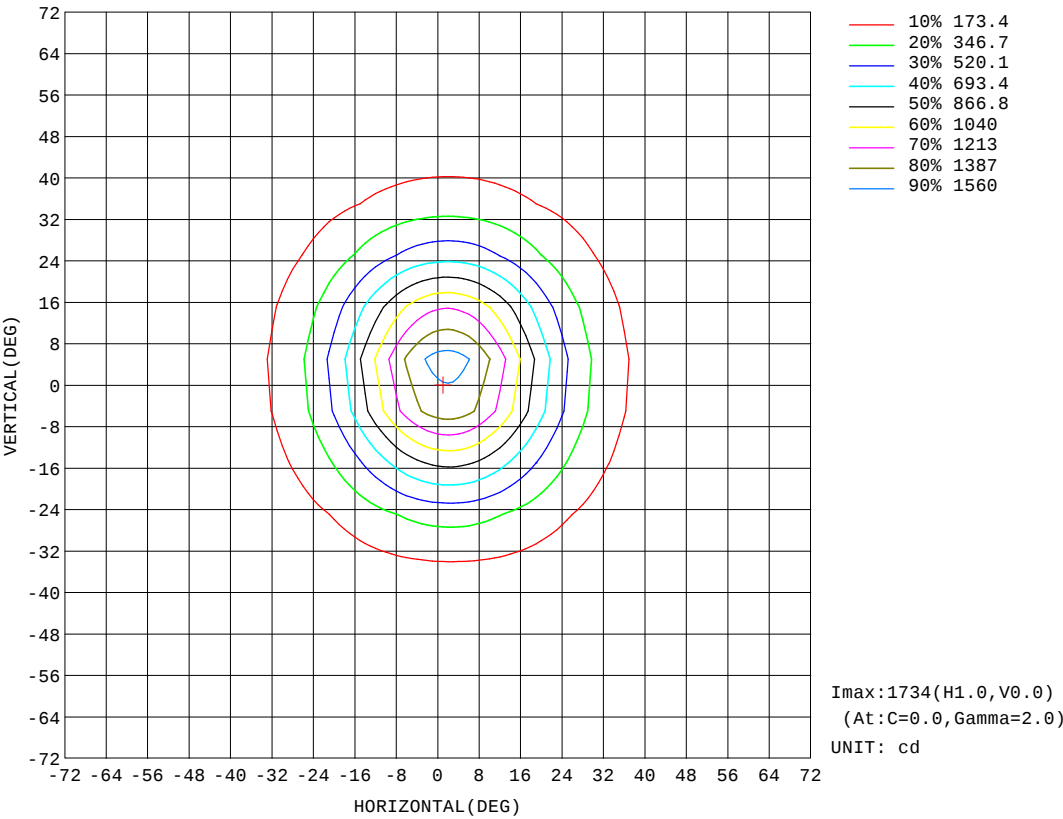


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.3V I:0.2544A P:18.25W PF:0.5965 Freq:50.00Hz Lamp Flux:834.363x1 lm		
NAME: SP-PZT-R110-3P-RDM-1	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080045
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

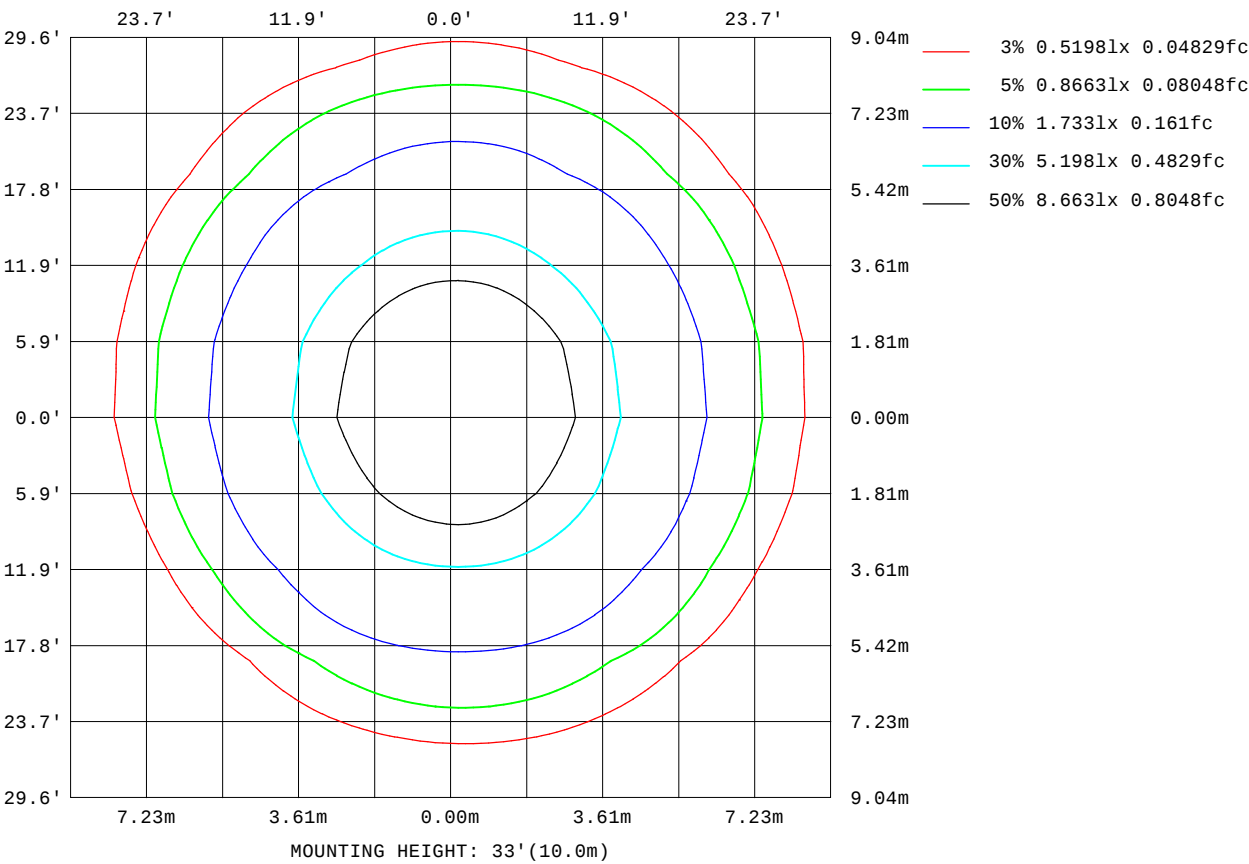

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

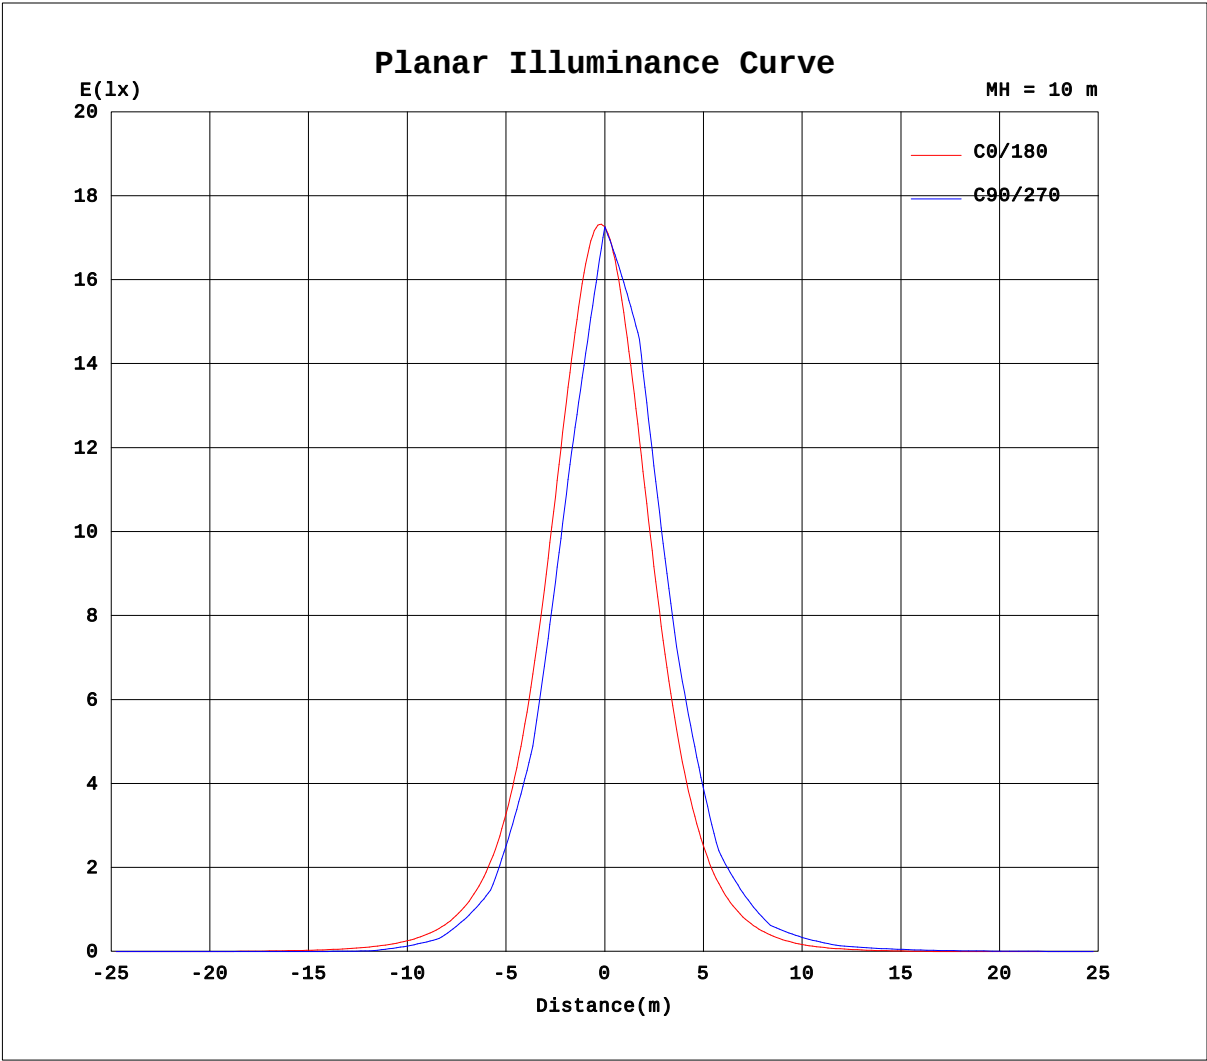


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.3V I:0.2544A P:18.25W PF:0.5965 Freq:50.00Hz Lamp Flux:834.363x1 lm		
NAME: SP-PZT-R110-3P-RDM-1	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080045
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

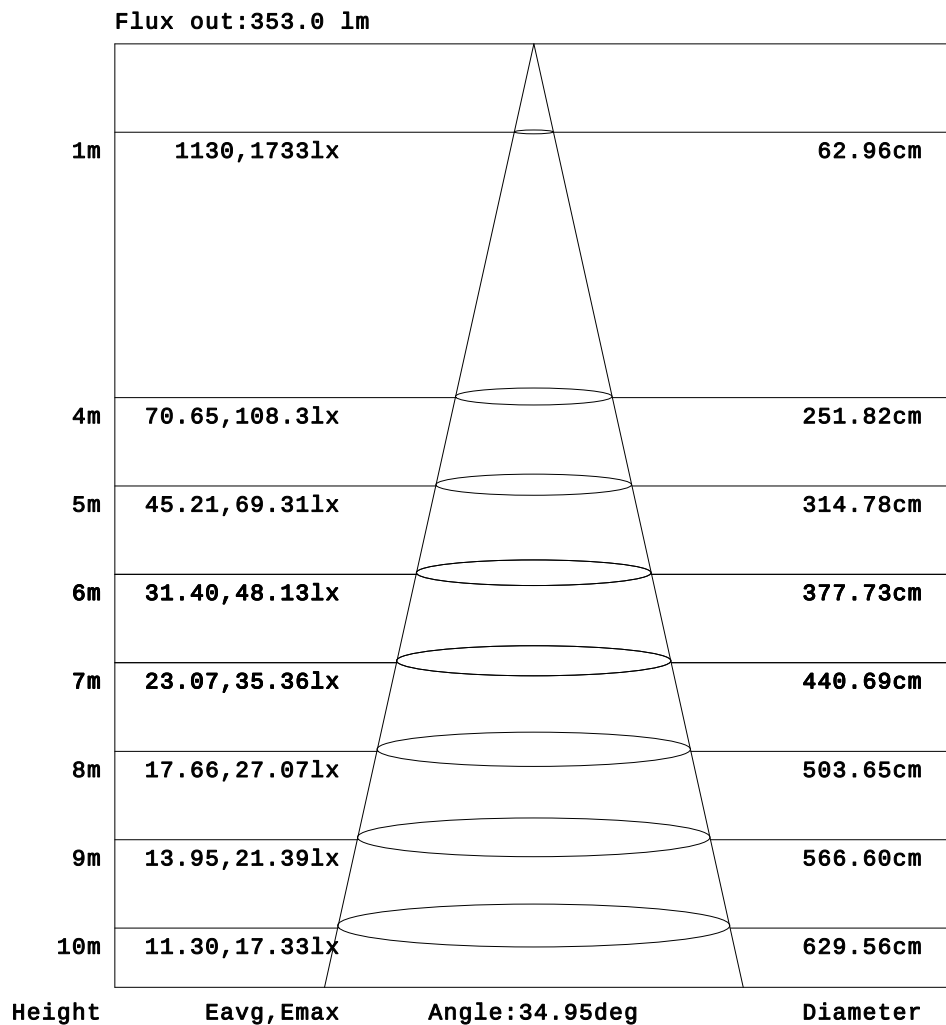

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.3V I:0.2544A P:18.25W PF:0.5965 Freq:50.00Hz Lamp Flux:834.363x1 lm		
NAME: SP-PZT-R110-3P-RDM-1	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080045
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.49	1.72	2.79
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.49	3.90	5.88	6.98
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.06	4.26	8.30	12.8	17.7	23.3	29.4	34.7	38.3
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.28	10.0	18.3	27.5	37.5	47.7	57.2	65.2	70.3
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.26	5.42	11.8	21.6	34.8	52.1	73.7	96.8	119	137	148
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.97	12.8	24.0	37.9	57.6	84.7	119	155	189	214	227
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.68	7.46	17.6	31.7	52.8	84.5	128	184	250	319	375	407
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.08	14.5	27.3	46.5	78.6	127	191	273	373	474	554	591
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.14	5.76	15.9	30.2	53.7	92.8	153	238	357	507	671	816	898
-10	0.00	0.00	0.00	0.00	0.00	0.00	1.35	10.1	22.3	40.5	73.9	127	209	327	496	707	932	1123	1218
-5	0.00	0.00	0.00	0.00	0.00	0.00	1.18	9.84	22.0	40.8	74.8	129	215	345	535	784	1065	1318	1463
0	0.00	0.00	0.00	0.00	0.00	0.00	3.75	13.8	27.8	51.8	93.9	159	263	429	665	971	1310	1592	1730
5	0.00	0.00	0.00	0.00	0.00	0.00	2.24	11.7	24.7	45.9	82.6	140	231	374	585	861	1177	1458	1619
10	0.00	0.00	0.00	0.00	0.00	0.00	4.12	14.2	28.3	51.8	90.5	151	247	392	605	874	1168	1413	1529
15	0.00	0.00	0.00	0.00	0.00	0.00	1.94	11.2	23.4	42.7	73.5	121	193	301	460	664	888	1086	1196
20	0.00	0.00	0.00	0.00	0.00	0.00	3.14	12.5	24.9	43.6	72.4	115	177	265	390	541	696	820	877
25	0.00	0.00	0.00	0.00	0.00	0.00	0.75	8.47	18.8	33.8	54.9	85.7	130	190	274	376	482	572	621
30	0.00	0.00	0.00	0.00	0.00	0.00	0.51	8.20	17.9	31.1	48.0	71.7	104	145	197	254	308	351	371
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.11	12.3	22.9	35.8	52.4	74.0	101	135	173	209	239	255
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.09	10.5	19.4	29.6	41.0	54.3	70.5	88.7	107	123	135	141
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.85	5.01	12.3	20.5	29.2	38.7	49.4	61.2	73.2	83.7	92.0	96.6
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.23	8.37	14.8	21.2	27.2	33.0	38.6	43.8	48.2	51.6	53.1
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.55	3.55	7.55	12.9	17.9	22.5	26.6	30.2	33.4	35.8	37.1
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.50	6.75	10.6	13.7	16.1	18.1	19.6	20.8	21.4
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.80	2.97	4.94	6.55	7.84	9.41	10.7	11.7	12.3
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.13	1.34	2.25	2.91	3.28
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.57	1.04	1.41	1.61
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2025-08-06

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.3V I:0.2544A P:18.25W PF:0.5965 Freq:50.00Hz Lamp Flux:834.363x1 lm		
NAME: SP-PZT-R110-3P-RDM-1	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080045
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																		UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	3.58	3.41	2.86	1.99	0.88	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	7.16	6.64	5.42	3.57	1.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	39.0	36.9	32.7	26.7	20.5	14.9	10.6	6.81	3.50	0.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	70.4	65.9	57.8	47.4	37.3	28.0	19.7	12.2	5.73	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-35	148	139	122	101	78.5	58.0	40.3	26.3	16.0	7.89	3.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-30	224	207	178	145	111	80.4	54.7	35.8	22.8	13.0	4.89	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-25	406	371	314	248	184	130	87.4	56.4	34.8	20.6	10.4	2.77	0.00	0.00	0.00	0.00	0.00	0.00	
-20	579	516	424	324	234	160	106	67.0	40.1	23.6	12.4	3.90	0.00	0.00	0.00	0.00	0.00	0.00	
-15	893	797	650	489	342	227	147	92.4	55.7	32.3	17.8	7.72	0.60	0.00	0.00	0.00	0.00	0.00	
-10	1182	1027	812	590	400	257	162	101	59.9	34.2	18.6	8.01	0.22	0.00	0.00	0.00	0.00	0.00	
-5	1445	1267	1006	731	493	314	197	120	72.2	41.7	23.1	11.0	1.92	0.00	0.00	0.00	0.00	0.00	
0	1661	1414	1089	767	505	316	195	117	69.8	40.3	21.9	10.0	0.95	0.00	0.00	0.00	0.00	0.00	
5	1592	1391	1096	789	529	336	209	127	76.8	45.2	25.5	12.5	2.89	0.00	0.00	0.00	0.00	0.00	
10	1467	1260	979	697	466	294	184	113	68.6	40.8	23.0	10.7	1.40	0.00	0.00	0.00	0.00	0.00	
15	1176	1040	832	609	419	275	175	111	68.7	41.9	24.4	11.9	2.49	0.00	0.00	0.00	0.00	0.00	
20	849	744	594	438	307	209	136	88.4	55.9	34.9	20.1	8.99	0.49	0.00	0.00	0.00	0.00	0.00	
25	614	553	456	349	254	178	121	80.4	52.7	33.8	20.1	9.30	0.99	0.00	0.00	0.00	0.00	0.00	
30	362	326	275	218	166	121	86.1	59.7	40.8	26.6	15.4	5.94	0.00	0.00	0.00	0.00	0.00	0.00	
35	253	234	202	165	129	97.4	71.5	51.4	36.2	24.0	13.9	5.19	0.08	0.00	0.00	0.00	0.00	0.00	
40	139	130	115	97.4	79.3	62.2	48.0	36.4	26.3	17.1	8.80	1.27	0.00	0.00	0.00	0.00	0.00	0.00	
45	96.3	91.6	83.1	72.3	60.6	49.1	38.9	30.0	21.8	14.0	6.71	1.35	0.00	0.00	0.00	0.00	0.00	0.00	
50	52.8	50.8	47.1	42.5	37.3	31.5	26.0	20.3	14.2	8.01	1.78	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	37.2	36.2	34.0	31.0	27.5	23.4	19.2	14.6	9.60	4.64	1.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	21.5	20.9	19.7	18.1	16.1	13.6	10.6	7.00	2.90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	12.4	12.1	11.3	10.2	8.77	7.07	5.63	3.88	1.87	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	3.32	3.09	2.57	1.77	0.73	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	1.66	1.59	1.35	0.98	0.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-06

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: