

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	2073.2 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	70.2V x 70.0H
	At 50% of Imax	35.8V x 34.7H
	At 90% of Imax	13.6V x 12.7H

Beam Flux	Total	999.6 lumens per klm.
	To 10% of Imax	856.6 lumens per klm.
	To 50% of Imax	426.6 lumens per klm.
	To 90% of Imax	68.2 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.4V I:0.3896A P:29.23W PF:0.6297 Freq:49.99Hz Lamp Flux:1519.83x1 lm		
NAME: SP-PZT-R135-6P-RDM-1	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080047
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

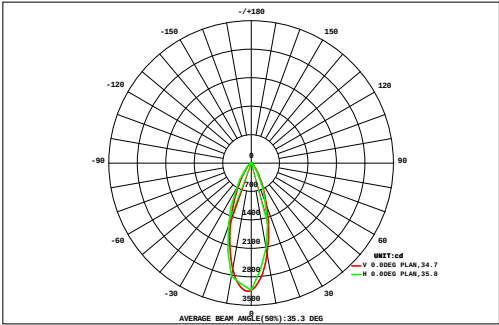

DATA OF LAMP		Eff:52.00lm/W	
MODE	SP-PZT-R135-6P-RDM-1	Imax(cd)	3151
NOMINAL POWER(W)	29	AVAILABILITY(%)	86.1
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	1308
NOMINAL FLUX(lm)	1519.83	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1520
TEST VOLTAGE(V)	120	θ @50%(H,V)	35,36DEG


VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a	
	72	0.00	0.00	0.00	0.00	0.02	0.11	0.25	0.37	0.45	0.49	0.47	0.40	0.30	0.18	0.05	0.01	0.00	0.00	3.10	0.00
	64	0.00	0.00	0.00	0.07	0.27	0.49	0.70	0.88	0.99	1.02	0.97	0.85	0.68	0.49	0.29	0.10	0.00	0.00	7.82	0.00
	56	0.00	0.00	0.05	0.24	0.56	0.91	1.30	1.65	1.88	1.92	1.78	1.50	1.16	0.82	0.51	0.24	0.05	0.00	14.6	0.00
	48	0.00	0.01	0.14	0.45	0.92	1.55	2.36	3.17	3.74	3.83	3.42	2.70	1.92	1.25	0.76	0.38	0.12	0.00	26.7	0.00
	40	0.00	0.03	0.25	0.68	1.41	2.61	4.30	6.20	7.65	7.89	6.81	5.01	3.22	1.89	1.04	0.51	0.19	0.02	49.7	21.9
	32	0.00	0.07	0.34	0.92	2.08	4.27	7.61	11.8	15.3	16.0	13.3	9.15	5.37	2.85	1.40	0.65	0.25	0.04	91.5	76.1
	24	0.00	0.10	0.42	1.18	2.95	6.55	12.9	22.0	30.0	31.4	25.2	15.9	8.43	4.06	1.80	0.76	0.29	0.05	164	152
		0.00	0.11	0.46	1.34	3.59	8.50	18.0	32.5	46.3	49.2	38.5	23.1	11.5	5.11	2.13	0.84	0.31	0.06	242	231
		0.00	0.11	0.47	1.39	3.83	9.50	20.9	38.5	55.8	59.6	46.1	27.2	13.1	5.63	2.26	0.86	0.31	0.06	286	276
		0.00	0.09	0.43	1.29	3.52	8.92	19.7	36.2	52.4	56.0	43.3	25.6	12.4	5.35	2.13	0.80	0.29	0.05	268	258
		0.00	0.05	0.34	1.02	2.67	6.52	13.9	24.7	34.6	36.8	29.6	18.5	9.50	4.30	1.76	0.70	0.24	0.03	185	174
	-24	0.00	0.02	0.22	0.69	1.78	4.02	8.02	13.4	18.2	19.3	16.0	10.5	5.84	2.87	1.25	0.51	0.17	0.01	103	89.3
	-32	0.00	0.00	0.11	0.40	0.98	2.11	4.05	6.43	8.35	8.85	7.62	5.42	3.29	1.72	0.80	0.34	0.10	0.00	50.6	29.5
	-40	0.00	0.00	0.03	0.18	0.43	0.86	1.55	2.29	2.80	3.00	2.76	2.21	1.50	0.86	0.43	0.18	0.04	0.00	19.1	0.00
	-48	0.00	0.00	0.00	0.05	0.15	0.30	0.47	0.66	0.87	0.97	0.92	0.74	0.52	0.34	0.18	0.06	0.00	0.00	6.22	0.00
-56	0.00	0.00	0.00	0.00	0.02	0.08	0.14	0.20	0.26	0.28	0.27	0.25	0.19	0.11	0.04	0.00	0.00	0.00	1.86	0.00	
-64	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.04	0.05	0.05	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.31	0.00	
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)				16	24	32	40	48	56	64	72	
Φ t	0.00	0.59	3.26	9.90	25.2	57.3	116	201	280	297	237	149	78.9	37.8	16.9	6.95	2.37	0.32	1519	---	
Φ a	0.00	0.00	0.00	0.00	1.64	38.7	101	187	266	283	222	135	61.3	13.3	0.00	0.00	0.00	0.00	---	1308	

one-half-peak spread: U:15.1,D:21.0 , L:17.8,R:17.1 NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2025-08-06
V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.4V I:0.3896A P:29.23W PF:0.6297 Freq:49.99Hz Lamp Flux:1519.83x1 lm		
NAME: SP-PZT-R135-6P-RDM-1	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080047
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

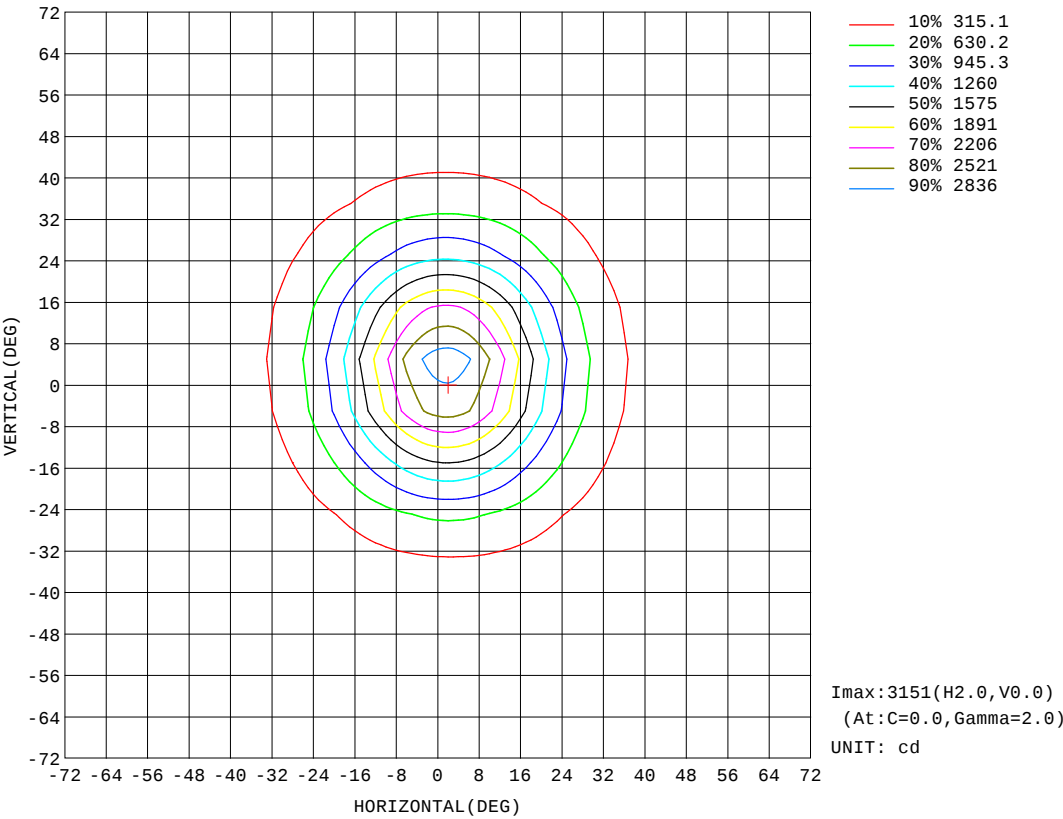


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.4V I:0.3896A P:29.23W PF:0.6297 Freq:49.99Hz Lamp Flux:1519.83x1 lm		
NAME: SP-PZT-R135-6P-RDM-1	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080047
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

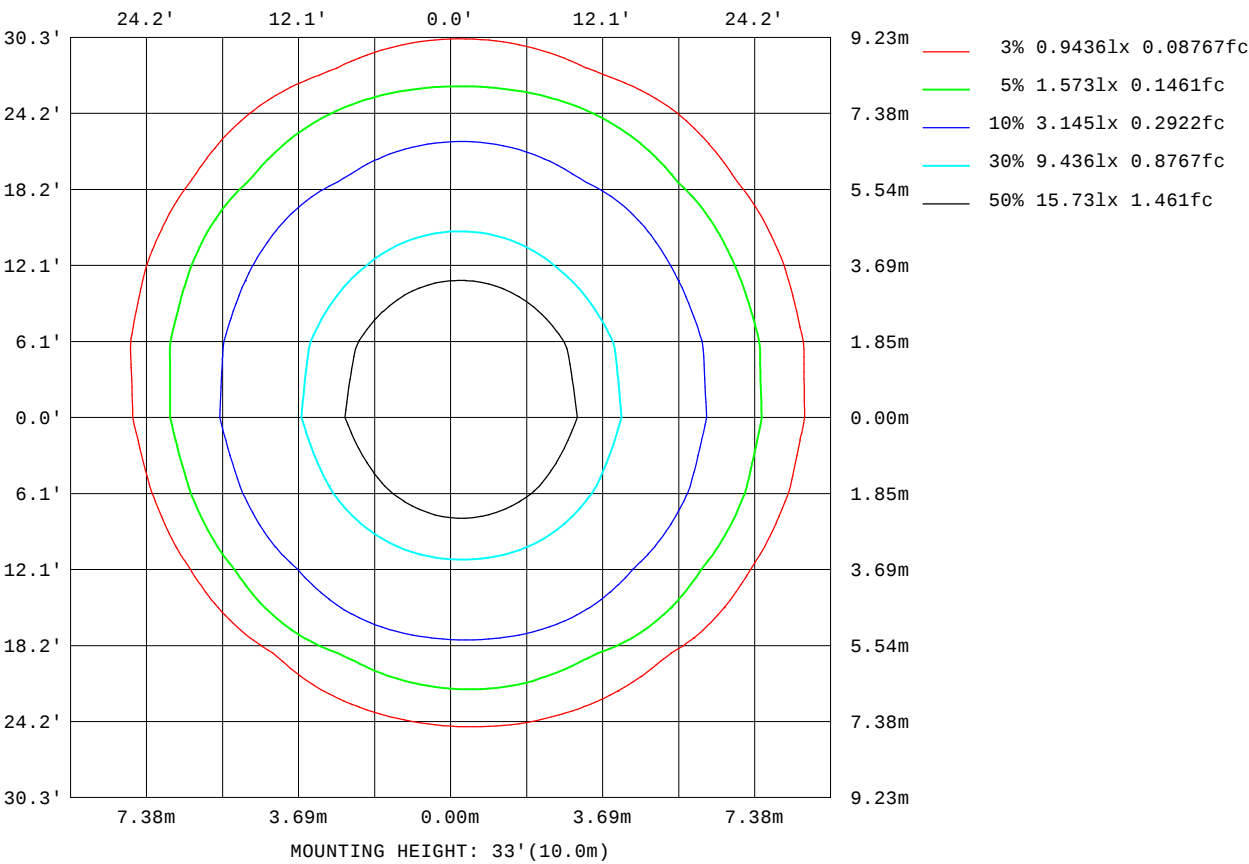

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

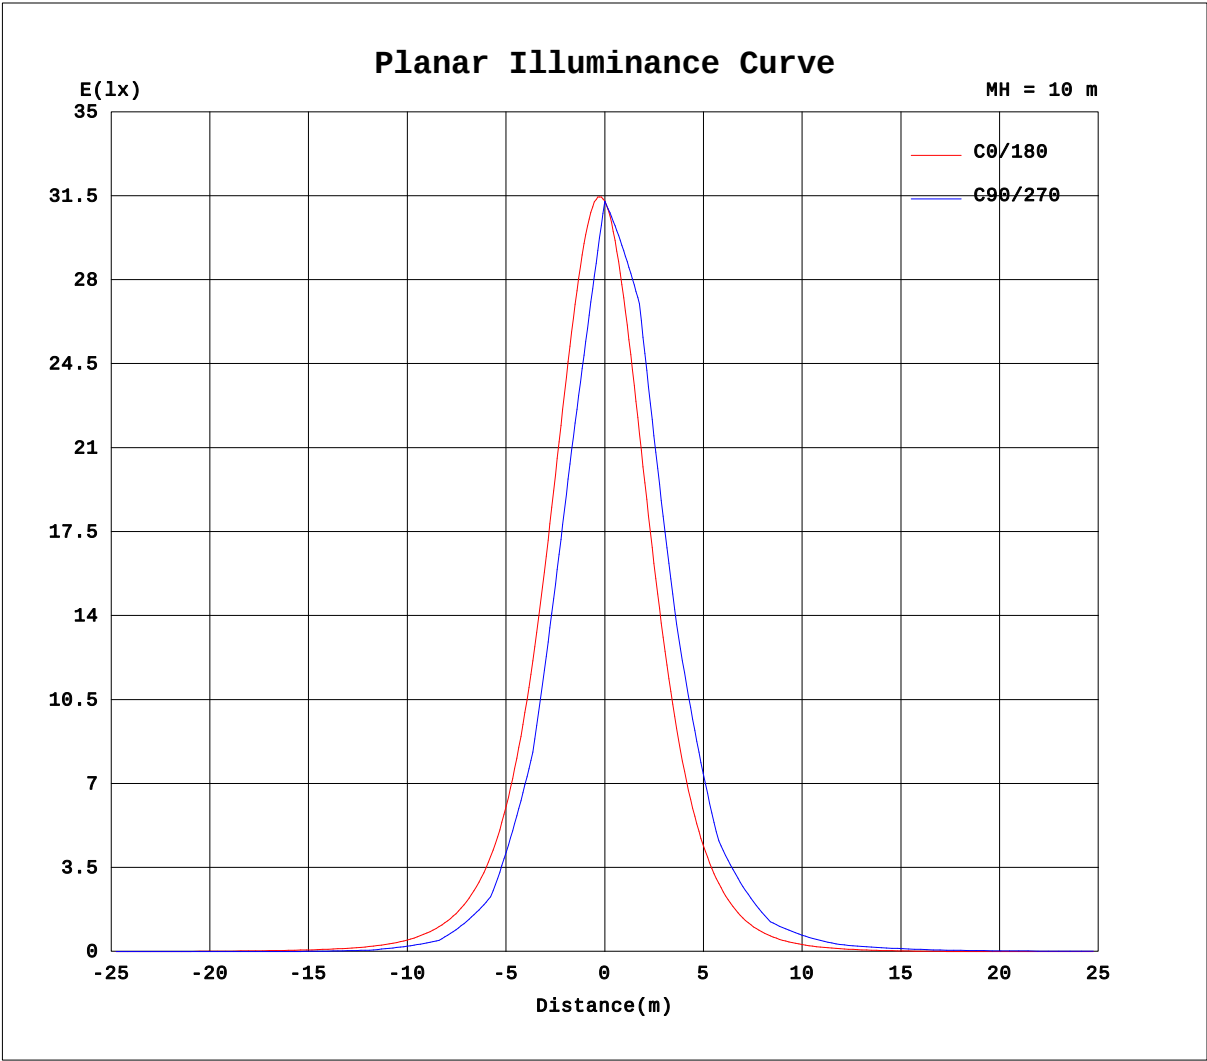


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.4V I:0.3896A P:29.23W PF:0.6297 Freq:49.99Hz Lamp Flux:1519.83x1 lm		
NAME: SP-PZT-R135-6P-RDM-1	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080047
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

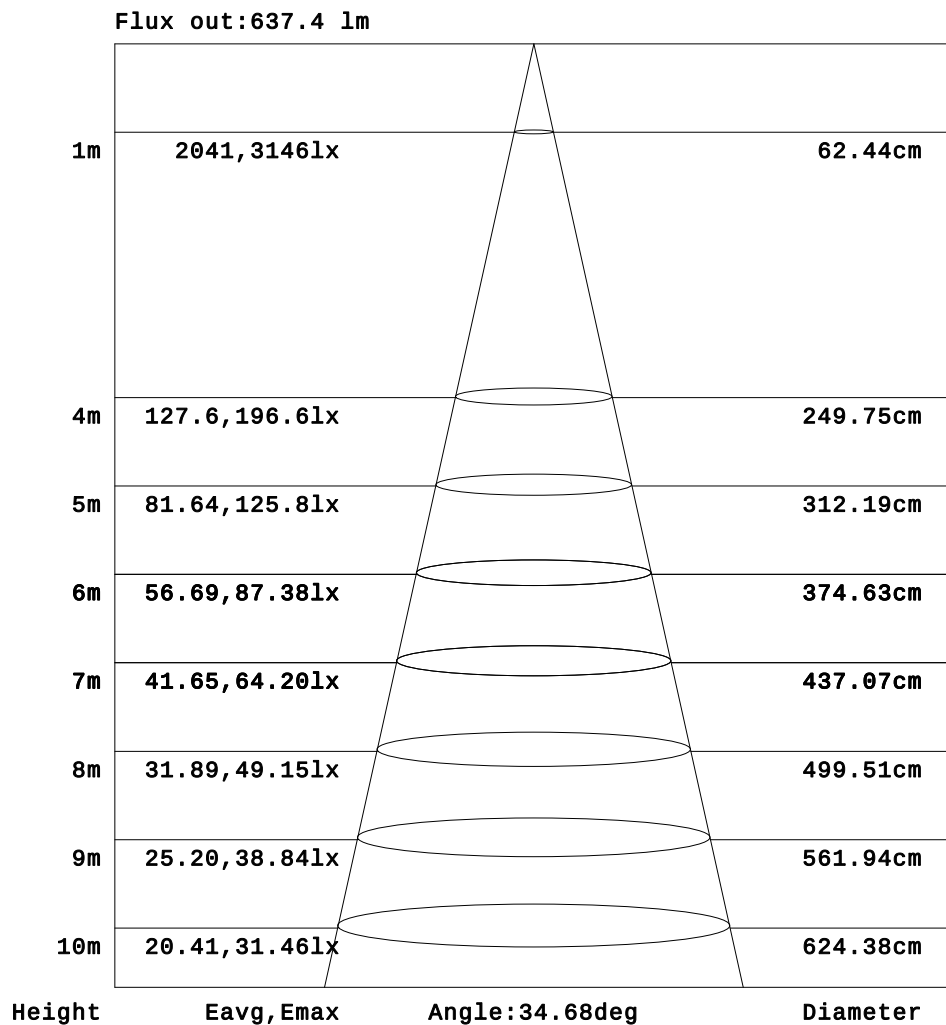

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.4V I:0.3896A P:29.23W PF:0.6297 Freq:49.99Hz Lamp Flux:1519.83x1 lm		
NAME: SP-PZT-R135-6P-RDM-1	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080047
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.95	3.34	5.03	6.55	8.16	9.89	11.3	12.3
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.90	6.67	10.1	13.1	16.3	19.8	22.7	24.6
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.05	6.50	10.9	17.8	25.5	33.6	42.5	51.7	60.0	65.5
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.10	13.0	19.9	28.9	40.9	54.2	68.6	83.7	97.3	106
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.49	5.13	13.5	23.6	36.9	55.6	81.5	115	151	185	213	229
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.98	10.3	21.0	34.1	53.8	82.2	122	177	234	287	328	353
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.75	17.0	32.0	53.6	87.7	137	209	306	416	530	624	677
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	10.5	23.7	43.0	73.0	121	192	296	434	597	773	920	1002
-15	0.00	0.00	0.00	0.00	0.00	0.00	2.55	14.7	30.3	54.8	94.2	158	260	414	628	891	1176	1424	1565
-10	0.00	0.00	0.00	0.00	0.00	0.00	5.11	18.8	36.8	66.6	115	195	328	532	821	1184	1578	1929	2128
-5	0.00	0.00	0.00	0.00	0.00	0.00	7.39	21.9	41.8	75.0	131	225	383	624	972	1419	1920	2370	2628
0	0.00	0.00	0.00	0.00	0.00	0.00	9.68	24.9	46.8	83.5	146	255	439	716	1122	1655	2261	2811	3128
5	0.00	0.00	0.00	0.00	0.00	0.00	10.2	25.3	47.2	83.6	147	255	430	695	1082	1591	2164	2683	2977
10	0.00	0.00	0.00	0.00	0.00	0.01	10.8	25.7	47.7	83.7	148	255	422	674	1042	1527	2067	2555	2827
15	0.00	0.00	0.00	0.00	0.00	0.00	10.2	24.4	45.3	78.6	135	228	368	577	870	1251	1670	2038	2236
20	0.00	0.00	0.00	0.00	0.00	0.00	9.63	23.0	43.0	73.5	123	201	314	479	699	975	1272	1521	1645
25	0.00	0.00	0.00	0.00	0.00	0.00	7.62	19.9	37.7	64.0	104	165	253	374	532	724	927	1094	1178
30	0.00	0.00	0.00	0.00	0.00	0.00	5.60	16.7	32.4	54.5	84.9	129	192	270	365	473	581	668	711
35	0.00	0.00	0.00	0.00	0.00	0.00	3.13	13.0	26.7	45.5	69.8	103	148	203	269	341	412	468	495
40	0.00	0.00	0.00	0.00	0.00	0.00	0.65	9.31	20.9	36.4	54.8	76.3	103	136	173	209	243	267	279
45	0.00	0.00	0.00	0.00	0.00	0.00	0.33	5.03	14.7	27.5	42.7	59.5	78.7	102	126	151	172	188	196
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.74	8.52	18.6	30.6	42.6	54.4	67.1	79.9	91.9	102	109	113
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.37	4.26	11.0	20.8	30.7	40.2	49.7	59.1	67.8	74.9	79.9	82.5
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.41	10.9	18.8	26.1	32.3	38.3	43.7	47.9	50.8	52.4
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.71	5.43	9.41	14.4	19.6	24.3	28.5	32.1	34.6	36.1
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.68	6.89	10.3	13.4	16.2	18.4	19.8
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.34	3.44	5.15	6.70	8.09	9.18	9.92
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2025-08-06

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.4V I:0.3896A P:29.23W PF:0.6297 Freq:49.99Hz Lamp Flux:1519.83x1 lm		
NAME: SP-PZT-R135-6P-RDM-1	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080047
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd		
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	12.6	12.4	12.0	11.1	9.60	7.88	5.99	4.03	2.12	0.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	25.2	24.8	24.0	22.1	19.2	15.8	12.0	8.06	4.24	0.62	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	66.9	64.5	58.8	50.7	41.6	32.9	25.0	18.1	11.9	6.37	2.77	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	109	104	93.5	79.3	64.0	50.0	38.1	28.2	19.6	12.1	5.55	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-35	231	217	191	159	126	94.9	68.3	47.2	32.1	20.7	11.7	4.15	0.05	0.00	0.00	0.00	0.00	0.00	
-30	354	330	289	240	188	140	98.6	66.2	44.6	29.3	17.9	8.30	0.10	0.00	0.00	0.00	0.00	0.00	
-25	673	614	517	406	302	214	147	95.8	61.9	39.9	24.4	12.5	2.79	0.00	0.00	0.00	0.00	0.00	
-20	993	898	745	572	416	288	195	126	79.1	50.6	30.9	16.7	5.47	0.00	0.00	0.00	0.00	0.00	
-15	1543	1374	1113	829	581	389	251	158	97.6	60.6	37.5	21.0	8.22	0.00	0.00	0.00	0.00	0.00	
-10	2094	1849	1481	1086	746	489	308	191	116	70.6	44.1	25.4	11.0	0.00	0.00	0.00	0.00	0.00	
-5	2577	2245	1768	1273	857	550	344	211	127	76.0	47.2	27.8	12.6	0.61	0.00	0.00	0.00	0.00	
0	3060	2642	2055	1460	969	611	379	232	137	81.3	50.4	30.2	14.3	1.22	0.00	0.00	0.00	0.00	
5	2914	2526	1972	1408	940	597	372	229	138	82.5	51.1	30.9	15.1	1.70	0.00	0.00	0.00	0.00	
10	2769	2411	1890	1356	911	582	366	226	139	83.6	51.8	31.7	15.8	2.19	0.00	0.00	0.00	0.00	
15	2189	1921	1523	1110	759	497	320	202	126	78.6	49.3	30.1	14.9	1.56	0.00	0.00	0.00	0.00	
20	1610	1431	1155	863	608	411	274	179	114	73.6	46.8	28.6	14.0	0.93	0.00	0.00	0.00	0.00	
25	1156	1036	850	650	471	328	225	151	99.9	66.4	42.9	26.1	12.2	0.47	0.00	0.00	0.00	0.00	
30	702	641	545	438	334	244	175	123	85.6	59.1	39.1	23.7	10.4	0.00	0.00	0.00	0.00	0.00	
35	489	450	389	318	248	187	138	100	72.3	50.9	33.7	19.7	7.45	0.00	0.00	0.00	0.00	0.00	
40	276	259	232	198	163	129	101	78.4	59.1	42.7	28.4	15.8	4.46	0.00	0.00	0.00	0.00	0.00	
45	194	184	167	145	122	100	80.2	63.6	48.7	35.0	22.6	11.3	2.23	0.00	0.00	0.00	0.00	0.00	
50	112	108	101	91.9	81.6	70.7	59.5	48.9	38.2	27.3	16.7	6.74	0.00	0.00	0.00	0.00	0.00	0.00	
55	82.5	80.1	75.5	69.3	62.1	54.2	45.8	37.4	28.6	19.3	10.2	3.37	0.00	0.00	0.00	0.00	0.00	0.00	
60	52.8	51.9	49.8	46.7	42.6	37.7	32.1	26.0	18.9	11.3	3.58	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	36.7	36.1	34.6	32.2	29.0	25.2	20.7	15.6	9.74	5.63	1.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	20.5	20.3	19.4	17.7	15.5	12.6	9.29	5.21	0.59	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	10.3	10.1	9.68	8.87	7.74	6.32	4.65	2.60	0.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: