


Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)		1807.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	70.0V x 69.1H
	At 50% of Imax	43.3V x 42.8H
	At 90% of Imax	22.8V x 23.6H
Beam Flux	Total	997.7 lumens per klm.
	To 10% of Imax	921.2 lumens per klm.
	To 50% of Imax	605.8 lumens per klm.
	To 90% of Imax	204.6 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.9V I:0.2034A P:14.17W PF:0.5767 Freq:50.00Hz Lamp Flux:271.697x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080026
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

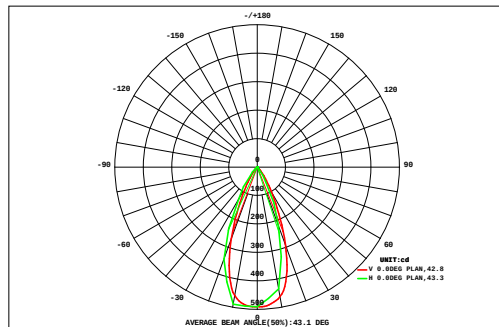

DATA OF LAMP		Eff:19.17lm/W	
MODEL: PZT-R170-12P-RDM-B		Imax(cd)	491.1
NOMINAL POWER(W)	14	AVAILABILITY(%)	92.6
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	251.6
NOMINAL FLUX(lm)	271.697	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	271.7
TEST VOLTAGE(V)	120	θ @50%(H,V)	43,43DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
	45	0.00	0.02	0.05	0.08	0.12	0.16	0.20	0.23	0.24	0.23	0.21	0.18	0.14	0.10	0.06	0.03	0.01	0.00	2.06	0.00	
	40	0.01	0.04	0.08	0.12	0.17	0.23	0.28	0.33	0.35	0.34	0.31	0.26	0.21	0.15	0.10	0.05	0.01	0.00	3.03	0.17	
	35	0.03	0.07	0.13	0.21	0.32	0.46	0.61	0.75	0.81	0.79	0.70	0.57	0.43	0.29	0.19	0.11	0.05	0.01	6.55	5.21	
	30	0.05	0.10	0.18	0.29	0.44	0.64	0.86	1.06	1.16	1.13	1.00	0.80	0.60	0.40	0.25	0.15	0.08	0.02	9.21	8.10	
	25	0.07	0.14	0.27	0.46	0.77	1.18	1.63	1.99	2.20	2.16	1.93	1.53	1.07	0.67	0.39	0.22	0.11	0.04	16.8	16.0	
	20	0.08	0.18	0.34	0.61	1.03	1.59	2.22	2.72	3.01	2.96	2.64	2.10	1.45	0.89	0.51	0.28	0.14	0.06	22.8	22.0	
	15	0.09	0.20	0.41	0.77	1.35	2.08	2.78	3.22	3.42	3.42	3.19	2.68	1.92	1.19	0.66	0.34	0.16	0.07	28.0	27.3	
	10	0.11	0.23	0.48	0.93	1.66	2.54	3.35	3.80	3.97	3.98	3.80	3.26	2.36	1.46	0.80	0.40	0.19	0.08	33.4	32.8	
	5	0.10	0.22	0.46	0.90	1.61	2.47	3.20	3.57	3.72	3.72	3.57	3.11	2.31	1.45	0.77	0.38	0.17	0.07	31.8	31.2	
	0	0.10	0.23	0.47	0.94	1.68	2.57	3.28	3.61	3.73	3.73	3.61	3.21	2.42	1.52	0.80	0.39	0.17	0.07	32.5	31.9	
	-5	0.08	0.18	0.37	0.73	1.31	2.05	2.74	3.19	3.39	3.38	3.15	2.63	1.89	1.16	0.62	0.30	0.14	0.05	27.3	26.7	
	-10	0.06	0.15	0.31	0.60	1.09	1.74	2.41	2.92	3.17	3.14	2.85	2.27	1.58	0.95	0.51	0.25	0.11	0.04	24.1	23.4	
	-15	0.04	0.10	0.22	0.41	0.71	1.11	1.53	1.88	2.06	2.04	1.82	1.43	0.99	0.62	0.34	0.17	0.08	0.02	15.6	14.8	
	-20	0.02	0.06	0.14	0.24	0.38	0.59	0.84	1.09	1.24	1.23	1.03	0.76	0.50	0.32	0.19	0.10	0.04	0.00	8.78	7.66	
	-25	0.01	0.03	0.08	0.16	0.26	0.40	0.54	0.68	0.75	0.74	0.64	0.50	0.35	0.22	0.12	0.06	0.02	0.00	5.56	4.30	
	-30	0.00	0.00	0.02	0.05	0.08	0.10	0.13	0.16	0.17	0.16	0.14	0.12	0.09	0.06	0.03	0.01	0.00	0.00	1.30	0.14	
-35	0.00	0.00	0.01	0.03	0.05	0.08	0.12	0.15	0.16	0.16	0.14	0.11	0.07	0.04	0.02	0.01	0.00	0.00	1.15	0.00		
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.00		
-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45			
Φ t	0.82	1.96	4.00	7.52	13.0	20.0	26.7	31.3	33.6	33.3	30.8	25.5	18.4	11.5	6.37	3.23	1.47	0.54	270	---		
Φ a	0.00	0.04	2.51	6.38	12.0	19.3	26.0	30.5	32.8	32.5	29.9	24.8	17.6	10.5	5.22	1.50	0.00	0.00	---	252		

one-half-peak spread: U:18.8,D:24.8 , L:23.0,R:20.0


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.9V I:0.2034A P:14.17W PF:0.5767 Freq:50.00Hz Lamp Flux:271.697x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080026
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

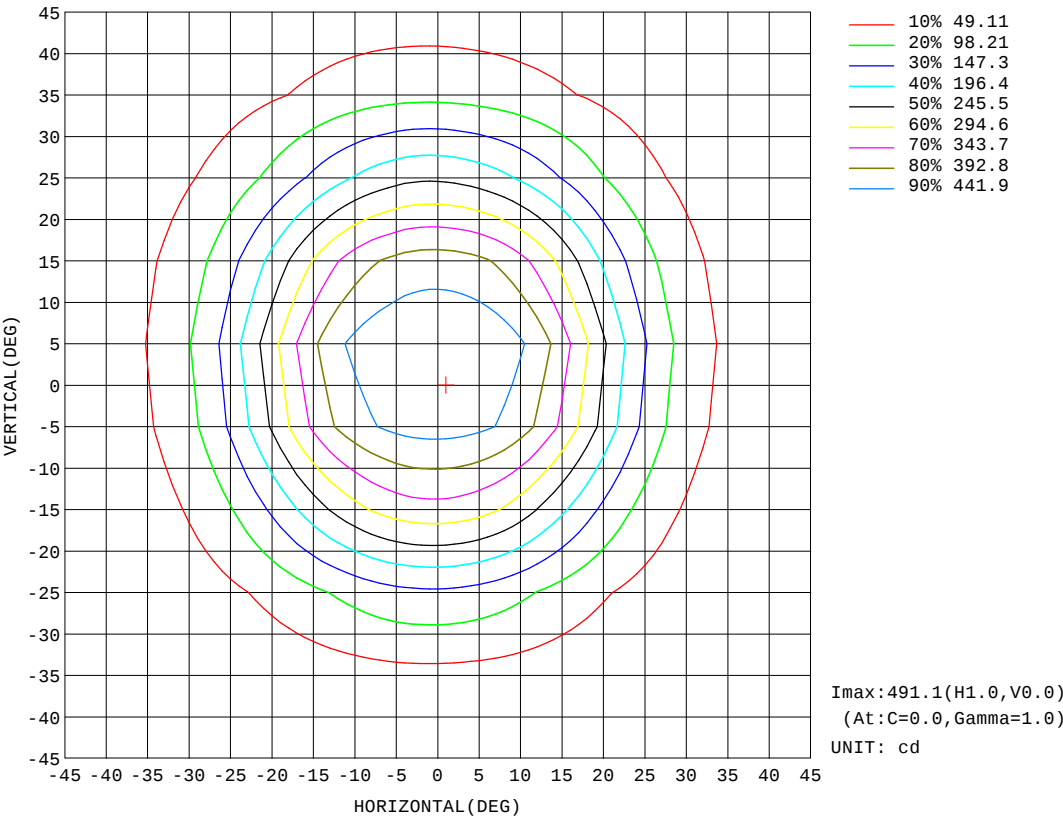


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.9V I:0.2034A P:14.17W PF:0.5767 Freq:50.00Hz Lamp Flux:271.697x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080026
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

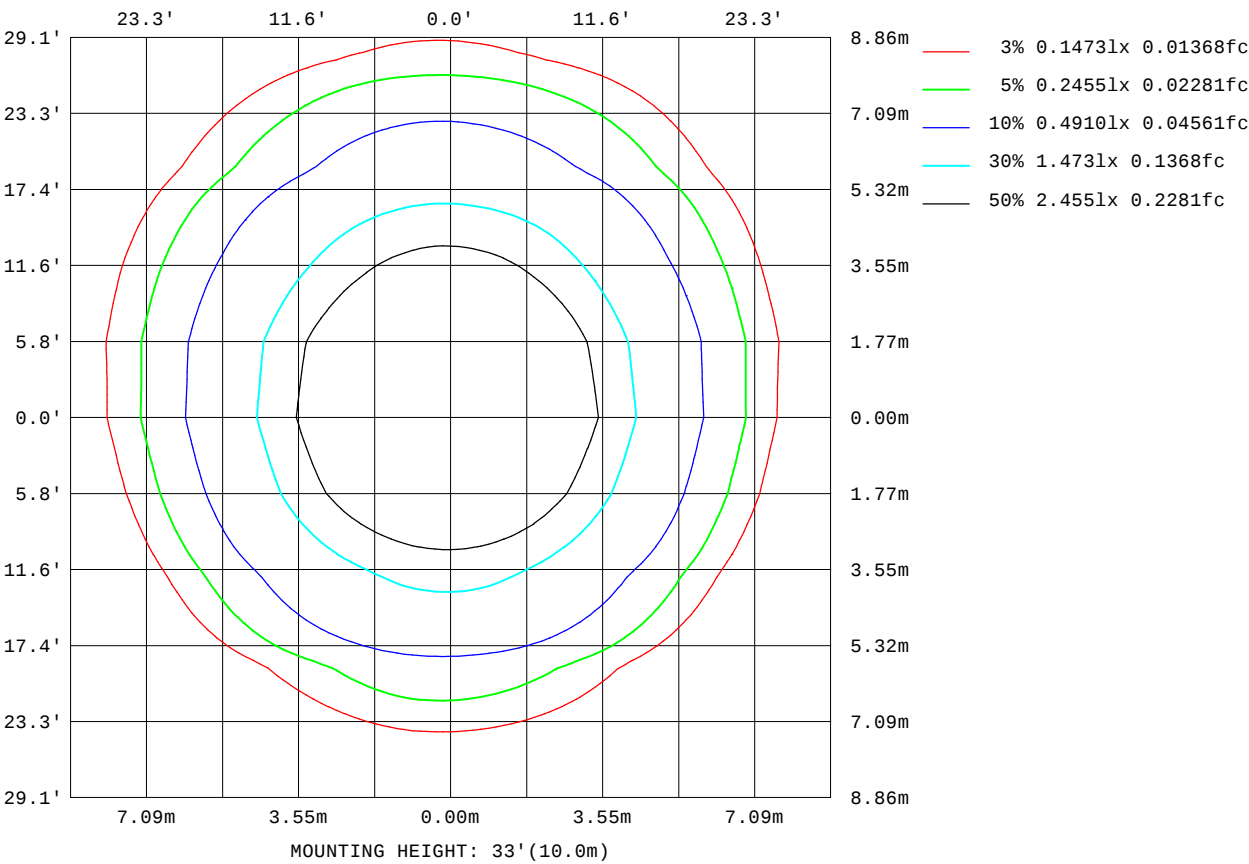

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

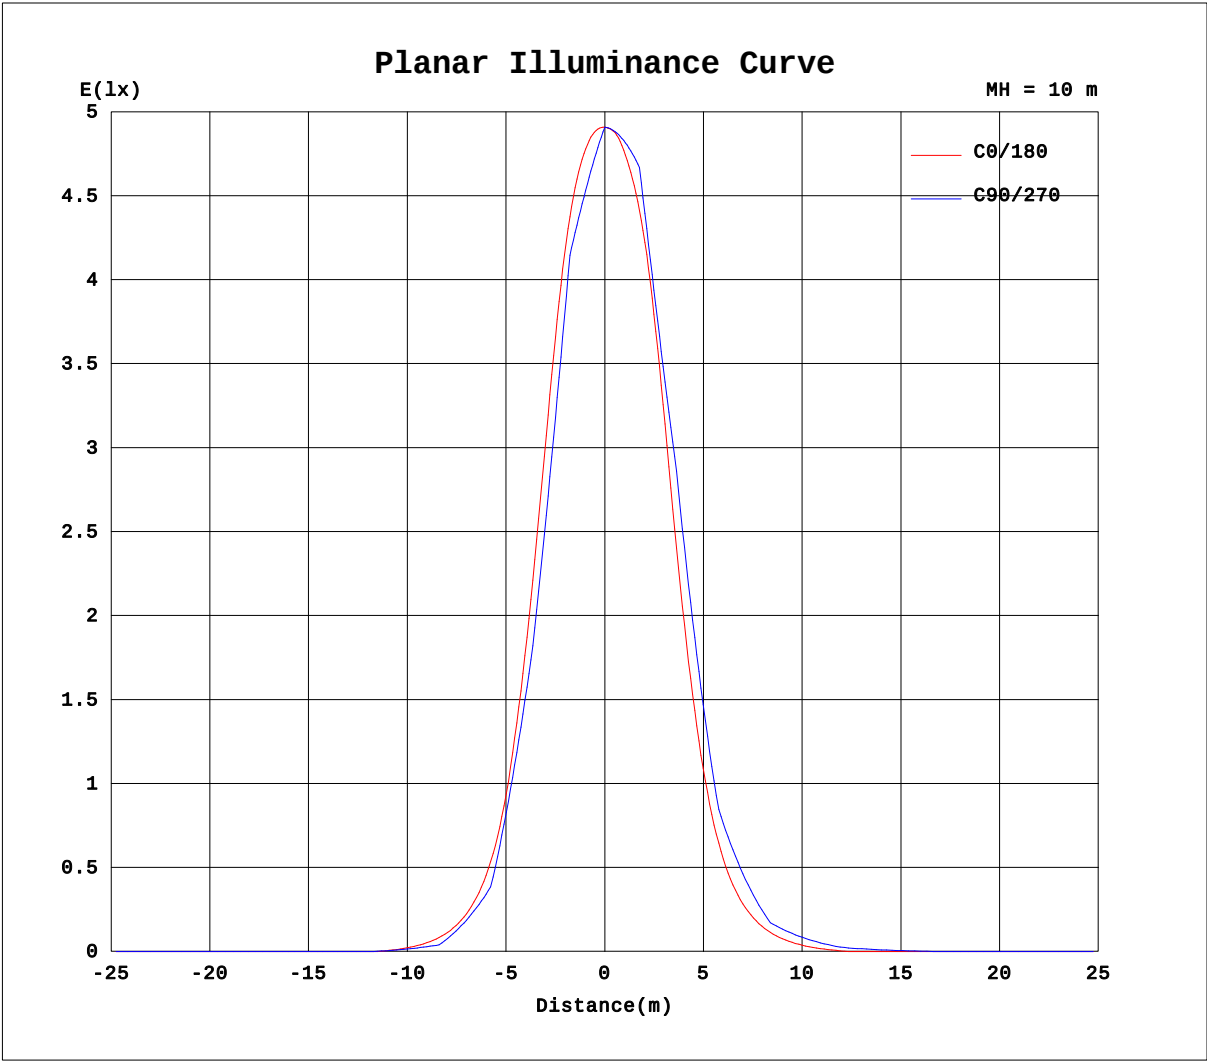


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.9V I:0.2034A P:14.17W PF:0.5767 Freq:50.00Hz Lamp Flux:271.697x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080026
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

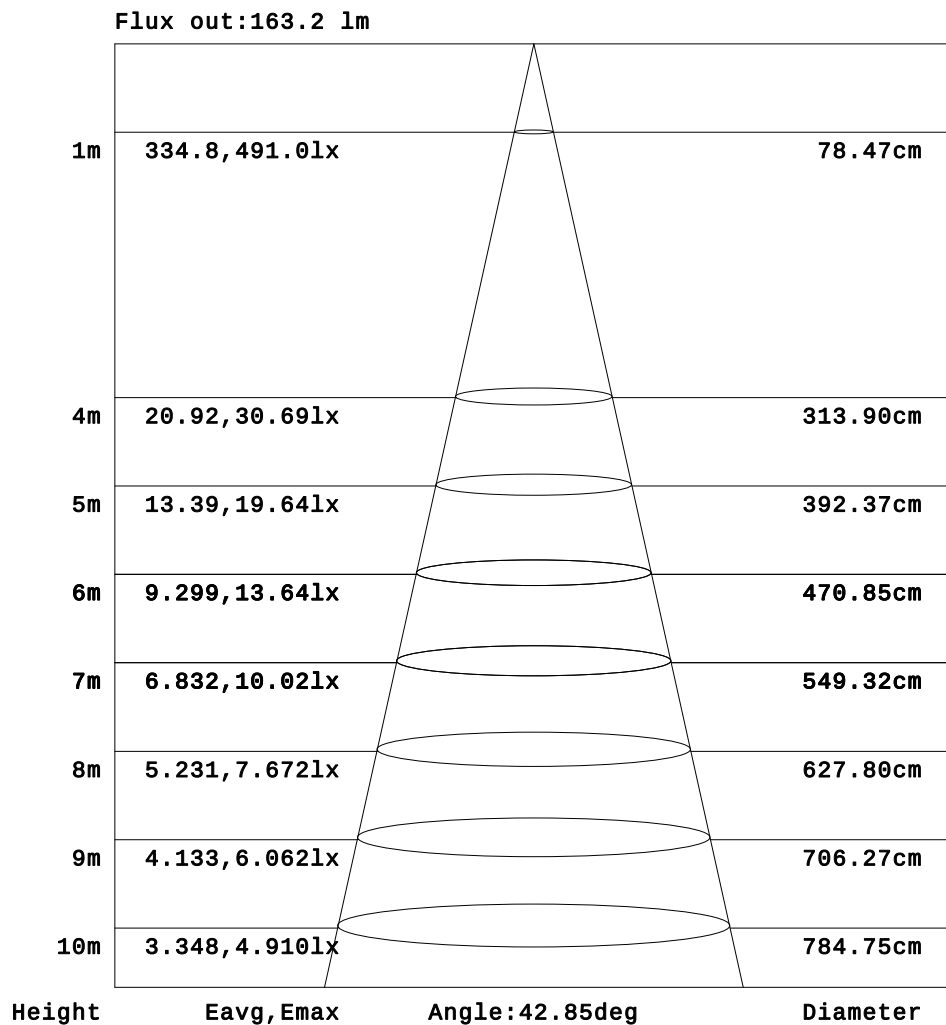

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.9V I:0.2034A P:14.17W PF:0.5767 Freq:50.00Hz Lamp Flux:271.697x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080026
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd			
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.24	1.54	2.69	3.67	4.35	4.55	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.48	3.07	5.37	7.34	8.70	9.09	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.28	5.67	9.94	15.9	22.2	28.5	33.3	34.3	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.55	11.3	19.4	28.8	38.9	49.6	57.9	59.5	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.52	4.32	12.2	23.8	40.3	62.3	88.5	114	134	140	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.04	8.64	19.8	36.4	61.3	95.9	138	179	210	220	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.98	13.5	28.6	53.9	95.3	155	222	280	316	327	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	6.91	18.4	37.5	71.4	129	214	306	380	423	434	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.04	8.95	22.0	44.6	85.5	155	252	352	421	454	463	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.08	11.0	25.5	51.7	99.5	181	289	399	462	486	491	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.21	11.1	25.4	50.7	96.1	173	277	384	454	482	490	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.34	11.1	25.4	49.6	92.8	166	265	370	446	479	489	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.70	9.79	22.2	42.5	76.9	133	211	297	367	405	417	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.05	8.43	19.0	35.4	61.1	101	157	225	289	331	345	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.53	5.93	14.5	27.0	45.5	72.8	111	156	200	229	238	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.43	10.0	18.6	30.0	44.8	64.0	87.3	111	127	130	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.71	6.29	12.9	21.0	31.2	43.7	58.4	72.7	82.2	84.4	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.55	7.09	12.1	17.6	23.4	29.5	34.7	37.9	38.4	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.28	3.54	6.76	10.7	14.7	18.7	22.0	24.0	24.3	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.43	3.88	5.99	7.84	9.26	10.1	10.2	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.71	1.94	2.99	3.92	4.63	5.04	5.09	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.9V I:0.2034A P:14.17W PF:0.5767 Freq:50.00Hz Lamp Flux:271.697x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080026
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	4.27	3.53	2.30	0.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	8.55	7.06	4.61	1.59	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	31.7	26.7	20.2	13.2	7.55	3.67	0.80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	54.8	46.2	35.7	24.9	15.1	7.34	1.59	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	130	108	80.1	54.1	33.3	18.3	8.17	2.65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	205	169	124	83.3	51.6	29.3	14.7	5.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	312	269	205	138	81.8	44.5	22.4	9.45	1.97	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	418	369	285	192	112	59.6	30.0	13.6	3.94	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	452	414	333	229	136	71.0	35.5	16.2	5.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	486	458	381	267	159	82.5	41.1	18.8	6.57	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	483	448	367	253	151	80.3	40.6	19.2	7.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	480	438	352	239	143	78.1	40.1	19.5	7.47	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	402	357	281	189	115	64.3	34.0	16.6	6.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	324	276	209	139	86.2	50.5	27.9	13.7	4.82	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	222	190	145	99.5	63.3	38.1	21.3	10.1	2.74	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	121	103	81.5	59.4	40.3	25.7	14.8	6.52	0.66	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	78.7	67.7	54.3	40.3	27.8	17.6	9.55	3.26	0.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	36.3	32.3	27.0	21.2	15.2	9.48	4.26	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	23.0	20.4	16.9	13.0	8.74	4.74	2.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	9.70	8.54	6.87	4.76	2.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	4.85	4.27	3.44	2.38	1.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: