


Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)		1632.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	73.2V x 72.6H
	At 50% of Imax	43.7V x 43.2H
	At 90% of Imax	22.7V x 23.4H
Beam Flux	Total	999.5 lumens per klm.
	To 10% of Imax	872.1 lumens per klm.
	To 50% of Imax	555.4 lumens per klm.
	To 90% of Imax	181.8 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.7V I:0.2010A P:14.11W PF:0.5818 Freq:50.00Hz Lamp Flux:993.603x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080025
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

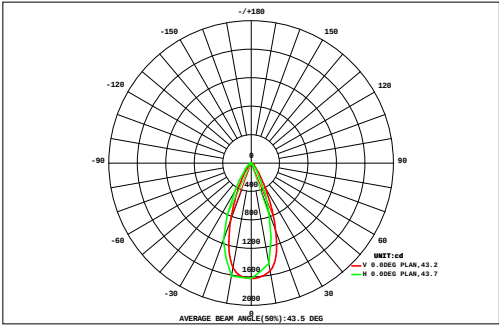

DATA OF LAMP		Eff:70.40lm/W	
MODEL: PZT-R170-12P-RDM-G		Imax(cd)	1622
NOMINAL POWER(W)	14	AVAILABILITY(%)	87.5
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	869.2
NOMINAL FLUX(lm)	993.603	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	993.6
TEST VOLTAGE(V)	120	θ @50%(H,V)	43,44DEG


VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a	
	72	0.00	0.00	0.00	0.01	0.05	0.15	0.25	0.31	0.34	0.32	0.27	0.18	0.07	0.02	0.01	0.00	0.00	0.00	1.99	0.00
	64	0.00	0.00	0.03	0.16	0.31	0.47	0.62	0.72	0.78	0.76	0.68	0.55	0.39	0.22	0.08	0.00	0.00	0.00	5.76	0.00
	56	0.00	0.02	0.12	0.31	0.55	0.80	1.04	1.23	1.33	1.32	1.19	0.98	0.72	0.46	0.24	0.07	0.00	0.00	10.4	0.00
	48	0.00	0.05	0.23	0.49	0.83	1.24	1.69	2.11	2.37	2.35	2.05	1.61	1.15	0.73	0.41	0.16	0.02	0.00	17.5	0.00
	40	0.00	0.12	0.35	0.69	1.21	1.94	2.91	4.02	4.79	4.70	3.80	2.70	1.75	1.03	0.56	0.24	0.05	0.00	30.9	17.9
	32	0.01	0.16	0.43	0.88	1.69	3.08	5.35	8.25	10.3	10.0	7.60	4.79	2.70	1.43	0.73	0.33	0.09	0.00	57.9	49.8
	24	0.02	0.19	0.49	1.07	2.30	4.96	10.2	17.0	21.7	21.3	15.9	9.07	4.29	1.93	0.90	0.40	0.12	0.00	112	105
		0.02	0.20	0.51	1.17	2.75	6.67	14.7	24.1	29.0	29.1	23.8	14.0	6.16	2.43	1.04	0.44	0.15	0.01	156	151
		0.02	0.20	0.53	1.22	2.98	7.76	17.5	27.9	32.0	32.2	27.5	16.7	7.11	2.61	1.06	0.45	0.15	0.01	178	172
		0.02	0.20	0.52	1.21	2.97	7.88	17.5	26.8	30.3	30.2	25.4	15.0	6.23	2.29	0.94	0.40	0.12	0.00	168	162
		0.01	0.16	0.44	0.99	2.25	5.51	12.4	20.9	25.9	25.4	19.4	10.9	4.60	1.85	0.82	0.36	0.09	0.00	132	126
	-24	0.00	0.11	0.34	0.72	1.50	3.02	6.11	10.5	13.8	13.6	9.92	5.66	2.85	1.35	0.64	0.27	0.06	0.00	70.5	62.9
	-32	0.00	0.05	0.24	0.51	0.97	1.72	2.90	4.53	5.86	5.78	4.36	2.71	1.58	0.87	0.45	0.17	0.02	0.00	32.7	21.7
	-40	0.00	0.02	0.13	0.33	0.59	0.92	1.22	1.43	1.61	1.57	1.39	1.13	0.78	0.49	0.25	0.07	0.00	0.00	11.9	0.00
	-48	0.00	0.00	0.04	0.17	0.31	0.47	0.61	0.68	0.69	0.70	0.66	0.52	0.37	0.21	0.08	0.01	0.00	0.00	5.53	0.00
	-56	0.00	0.00	0.00	0.00	0.05	0.13	0.23	0.31	0.33	0.29	0.24	0.18	0.11	0.04	0.01	0.00	0.00	0.00	1.90	0.00
	-64	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.05	0.05	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.29	0.00
	-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)					16	24	32	40	48	56	64	72
Φ t	0.12	1.45	4.40	9.94	21.3	46.7	95.3	151	181	180	144	86.7	40.9	18.0	8.23	3.39	0.86	0.02	993	---	
Φ a	0.00	0.00	0.00	0.00	7.89	37.0	86.7	143	173	172	136	78.4	31.1	4.24	0.00	0.00	0.00	0.00	0.00	---	869

one-half-peak spread: U:18.9,D:25.0 , L:22.8,R:20.6 NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2025-08-05
 V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.7V I:0.2010A P:14.11W PF:0.5818 Freq:50.00Hz Lamp Flux:993.603x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080025
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

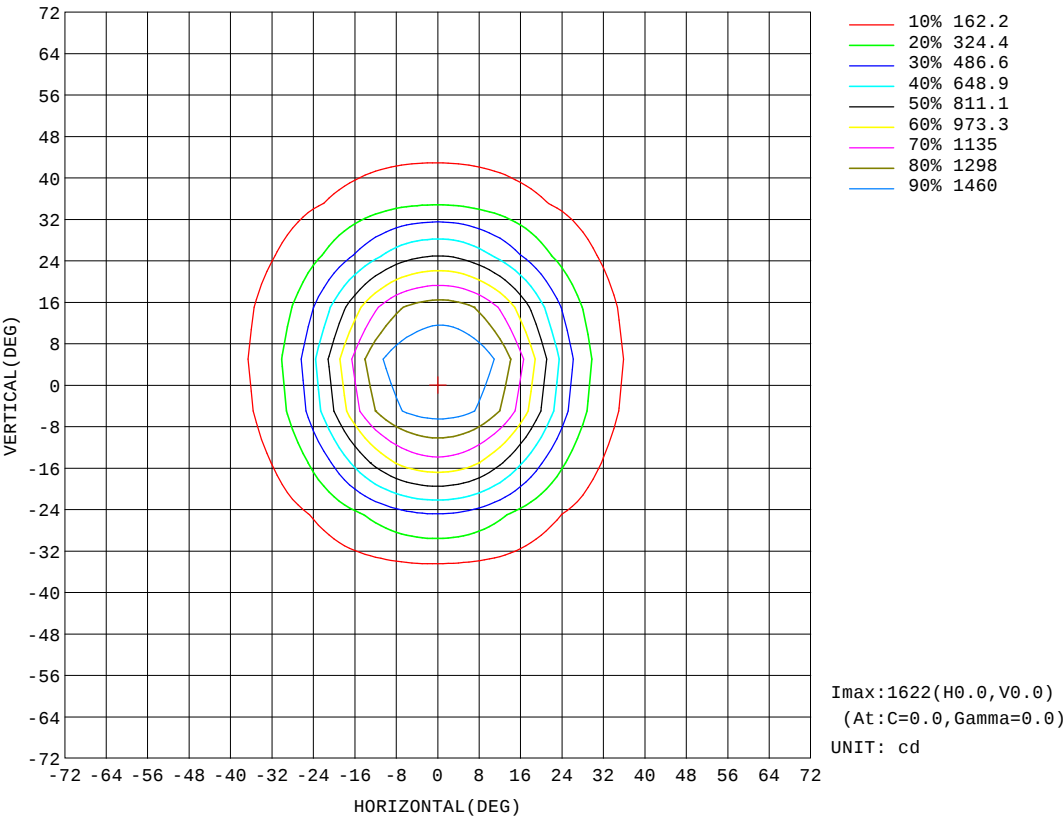


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.7V I:0.2010A P:14.11W PF:0.5818 Freq:50.00Hz Lamp Flux:993.603x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080025
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

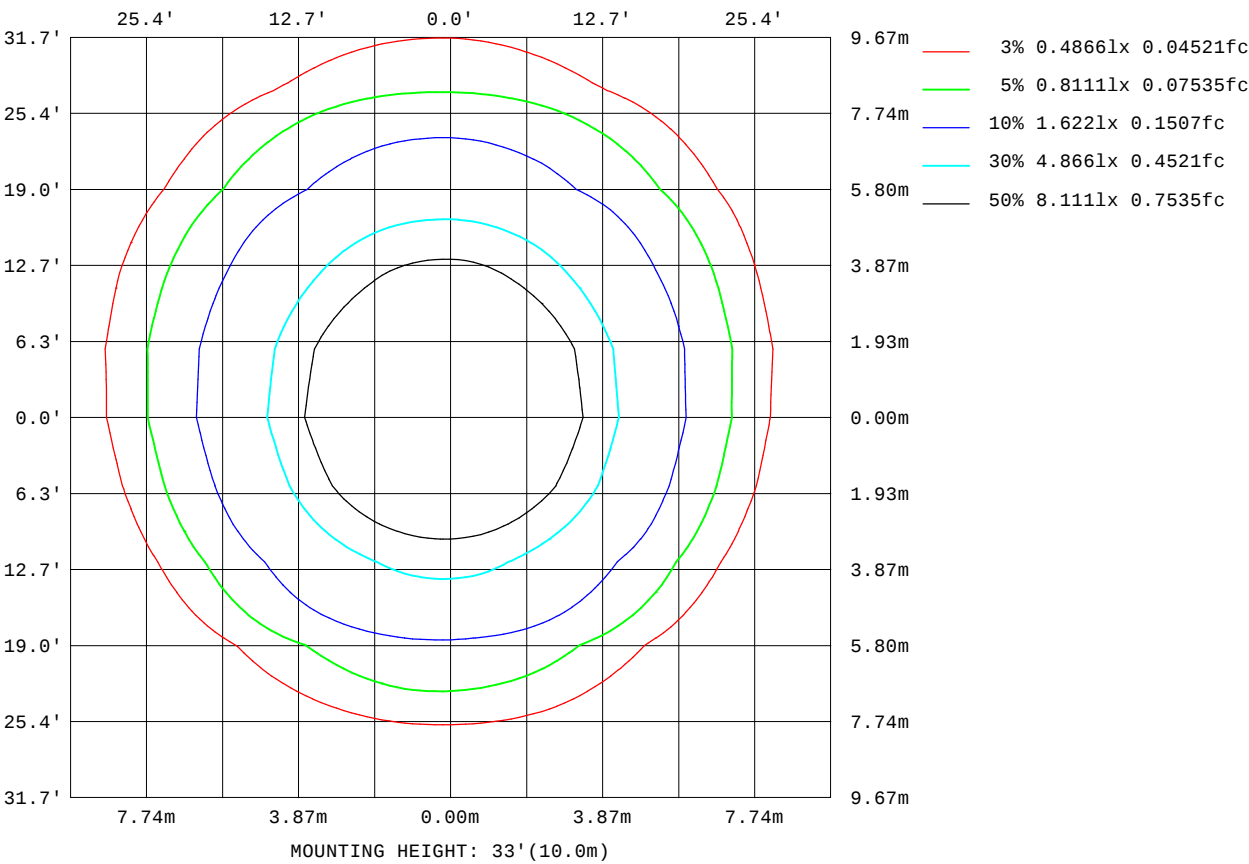

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

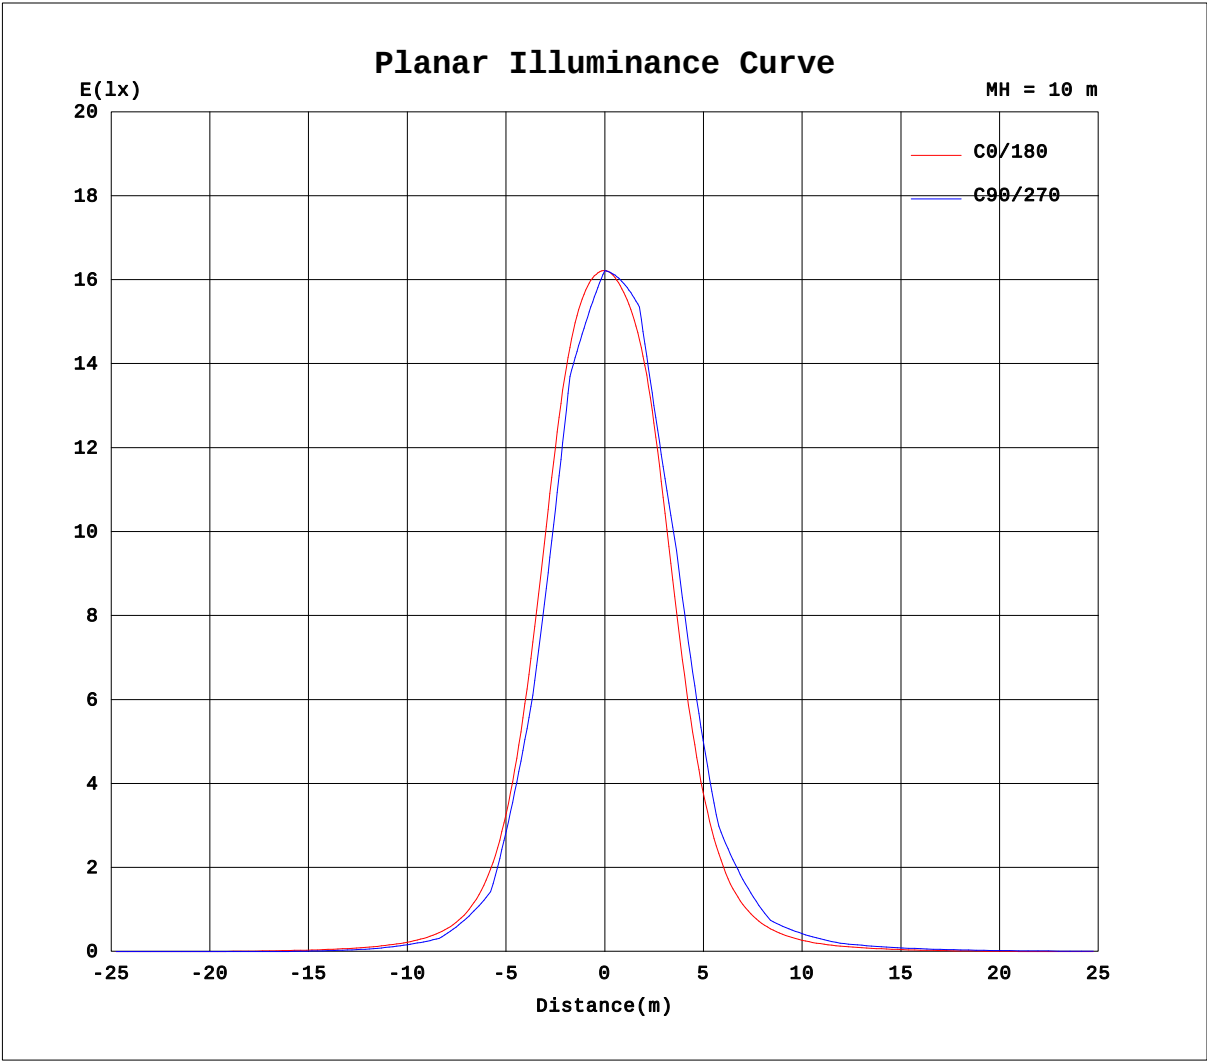


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.7V I:0.2010A P:14.11W PF:0.5818 Freq:50.00Hz Lamp Flux:993.603x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080025
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

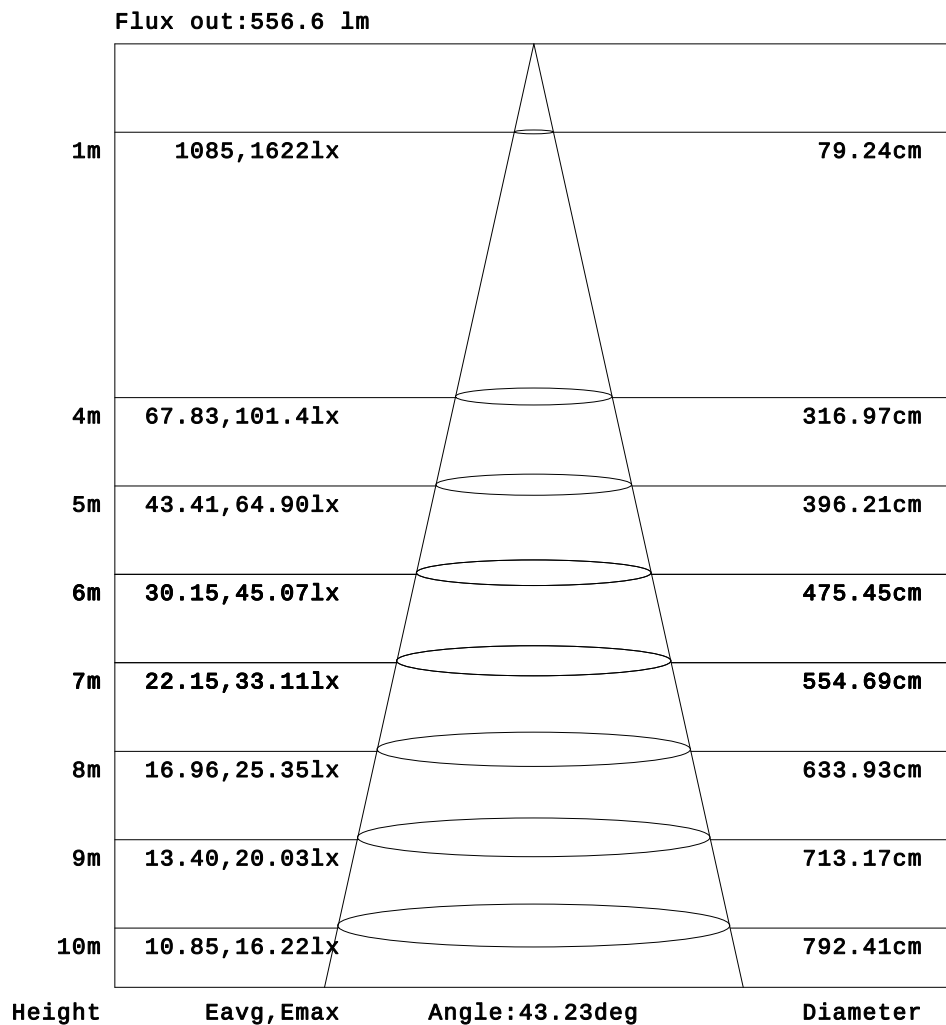

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.7V I:0.2010A P:14.11W PF:0.5818 Freq:50.00Hz Lamp Flux:993.603x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080025
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.96	2.96	5.02	7.01	8.95	10.6	11.8	12.2
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.73	6.74	10.8	14.8	18.6	21.8	23.9	24.5	23.9
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.36	3.88	7.70	12.4	17.7	23.4	29.5	35.1	40.1	44.0	46.4	47.1
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.05	9.25	16.9	24.3	30.8	38.4	46.5	53.7	60.1	65.3	69.0	70.3
-35	0.00	0.00	0.00	0.00	0.00	0.00	1.48	6.10	14.3	22.7	31.9	42.7	56.0	71.7	89.2	107	126	141	145
-30	0.00	0.00	0.00	0.00	0.00	0.00	4.58	13.3	22.7	32.0	43.5	59.5	79.6	104	132	162	194	217	219
-25	0.00	0.00	0.00	0.00	0.00	0.34	6.49	15.9	26.2	38.0	54.3	77.8	111	159	227	312	395	457	478
-20	0.00	0.00	0.00	0.00	0.00	2.25	12.1	22.5	34.0	49.6	73.2	108	159	238	357	497	625	713	735
-15	0.00	0.00	0.00	0.00	0.00	2.26	12.5	23.6	36.6	54.3	81.7	126	199	325	510	728	920	1045	1086
-10	0.00	0.00	0.00	0.00	0.00	5.96	17.2	29.5	45.1	68.1	105	168	280	478	750	1044	1279	1406	1432
-5	0.00	0.00	0.00	0.00	0.00	5.21	16.7	29.5	45.0	68.2	106	173	297	510	815	1140	1376	1491	1528
0	0.00	0.00	0.00	0.00	0.00	8.92	21.0	35.1	52.6	80.6	128	216	382	654	1011	1351	1536	1601	1622
5	0.00	0.00	0.00	0.00	0.00	6.76	18.8	32.4	48.5	74.1	116	192	329	562	893	1240	1478	1578	1614
10	0.00	0.00	0.00	0.00	0.01	9.32	21.7	35.4	52.9	81.2	127	210	352	590	918	1249	1477	1576	1607
15	0.00	0.00	0.00	0.00	0.00	6.54	18.3	31.3	46.9	70.6	107	169	271	442	687	964	1196	1331	1378
20	0.00	0.00	0.00	0.00	0.00	8.39	20.0	32.9	48.8	72.2	107	161	245	380	566	783	987	1116	1149
25	0.00	0.00	0.00	0.00	0.00	4.57	15.3	27.2	41.2	59.6	85.7	124	180	266	384	527	668	770	805
30	0.00	0.00	0.00	0.00	0.00	5.04	15.3	26.6	40.1	55.9	77.5	106	143	194	256	328	400	448	459
35	0.00	0.00	0.00	0.00	0.00	1.50	10.4	20.5	32.3	45.4	61.7	82.3	108	141	180	224	269	302	313
40	0.00	0.00	0.00	0.00	0.00	0.83	9.41	18.8	29.6	40.7	53.4	68.1	84.1	102	120	139	155	164	166
45	0.00	0.00	0.00	0.00	0.00	0.00	4.18	12.1	21.4	30.9	41.0	52.5	64.5	76.8	89.5	102	112	120	122
50	0.00	0.00	0.00	0.00	0.00	0.00	1.96	8.99	17.0	25.0	33.1	41.7	49.6	57.1	63.8	69.5	73.9	76.5	76.9
55	0.00	0.00	0.00	0.00	0.00	0.00	0.32	3.75	9.40	16.3	23.0	29.9	36.6	42.7	48.0	52.4	55.8	58.0	58.5
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.60	10.3	15.6	20.9	26.1	30.5	34.1	36.8	38.8	39.9	39.9
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.73	4.60	7.29	10.9	15.0	18.7	21.9	24.3	25.9	26.9	26.9
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.57	5.55	8.36	10.7	12.5	13.5	13.9	13.7
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.99	2.48	3.92	5.15	6.08	6.67	6.96	6.91
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2025-08-05

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.7V I:0.2010A P:14.11W PF:0.5818 Freq:50.00Hz Lamp Flux:993.603x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080025
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																		UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	11.3	10.3	9.06	7.61	6.02	4.38	2.51	0.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	22.3	20.1	17.6	14.6	11.4	8.10	4.18	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	46.1	43.2	38.6	32.4	26.3	20.5	14.8	9.30	5.56	2.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	69.0	64.7	57.2	47.6	38.9	30.7	23.2	16.5	9.81	3.38	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-35	139	125	106	85.5	66.5	50.3	37.8	27.7	18.8	10.4	3.65	0.15	0.00	0.00	0.00	0.00	0.00	0.00	
-30	204	179	147	115	87.1	64.5	48.0	35.2	24.4	14.2	5.71	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-25	452	385	295	212	150	103	71.1	49.9	34.5	22.1	11.5	2.86	0.00	0.00	0.00	0.00	0.00	0.00	
-20	679	556	408	281	191	126	84.3	57.7	39.4	25.5	13.4	3.63	0.00	0.00	0.00	0.00	0.00	0.00	
-15	1043	909	709	495	314	190	117	75.3	50.5	33.4	19.9	8.23	0.41	0.00	0.00	0.00	0.00	0.00	
-10	1368	1188	921	628	378	217	128	81.2	53.9	35.6	21.3	8.76	0.00	0.00	0.00	0.00	0.00	0.00	
-5	1498	1377	1133	806	497	283	161	97.0	62.7	41.3	25.9	12.7	1.74	0.00	0.00	0.00	0.00	0.00	
0	1597	1489	1220	851	515	287	161	95.9	61.5	40.2	25.1	11.9	0.80	0.00	0.00	0.00	0.00	0.00	
5	1596	1494	1242	888	553	316	179	106	68.2	44.3	28.1	14.9	3.18	0.00	0.00	0.00	0.00	0.00	
10	1571	1424	1131	780	479	275	159	98.2	63.8	41.0	25.7	13.0	1.51	0.00	0.00	0.00	0.00	0.00	
15	1341	1203	966	682	434	262	157	98.3	65.2	42.6	26.7	14.3	3.02	0.00	0.00	0.00	0.00	0.00	
20	1072	903	690	474	307	197	125	82.5	56.2	36.9	22.4	11.0	0.63	0.00	0.00	0.00	0.00	0.00	
25	767	659	519	375	256	172	115	77.9	54.3	36.6	22.3	11.2	1.36	0.00	0.00	0.00	0.00	0.00	
30	427	364	289	223	166	121	87.5	62.4	44.6	30.0	17.3	7.43	0.00	0.00	0.00	0.00	0.00	0.00	
35	299	263	217	174	135	103	76.4	55.8	40.4	27.5	15.7	6.44	0.19	0.00	0.00	0.00	0.00	0.00	
40	159	144	127	108	90.0	72.3	56.1	42.4	30.9	19.9	10.1	1.90	0.00	0.00	0.00	0.00	0.00	0.00	
45	118	110	98.6	86.2	73.2	59.9	47.4	35.9	26.1	16.6	7.76	1.78	0.00	0.00	0.00	0.00	0.00	0.00	
50	75.2	71.3	65.7	59.0	50.9	42.4	33.7	25.3	17.5	9.43	2.39	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	57.4	54.7	50.6	45.6	39.4	32.6	25.6	18.6	12.0	5.54	1.85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	38.7	36.6	33.7	29.8	25.2	20.1	14.5	9.29	3.86	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	26.1	24.5	22.2	19.2	15.6	11.5	7.82	5.16	2.49	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	13.0	11.6	9.65	7.20	4.35	1.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	6.58	5.94	5.04	3.86	2.48	0.91	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: