

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		1609.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	74.0V x 72.9H
	At 50% of Imax	44.0V x 43.7H
	At 90% of Imax	23.5V x 24.4H
Beam Flux	Total	999.5 lumens per klm.
	To 10% of Imax	873.7 lumens per klm.
	To 50% of Imax	561.2 lumens per klm.
	To 90% of Imax	194.5 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.7V I:0.2062A P:14.36W PF:0.5770 Freq:50.01Hz Lamp Flux:966.24lx1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080027
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

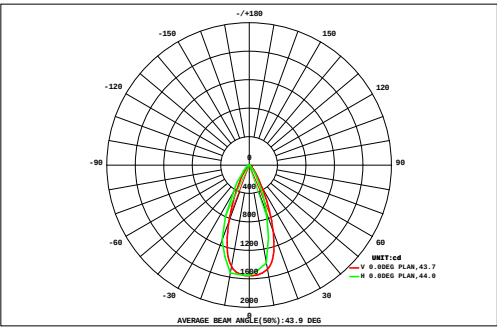

DATA OF LAMP		Eff:67.29lm/W	
MODEL: SP-PZT-R170-12P-RDM-W		Imax(cd)	1555
NOMINAL POWER(W)	14	AVAILABILITY(%)	87.6
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	846.6
NOMINAL FLUX(lm)	966.241	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	966.2
TEST VOLTAGE(V)	120	θ @50%(H,V)	44,44DEG


AREA FLUX DIAGRAM																	UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	72	0.00	0.00	0.00	0.01	0.04	0.13	0.22	0.29	0.31	0.29	0.24	0.16	0.06	0.01	0.01	0.00	0.00	0.00	1.78	0.00
	64	0.00	0.00	0.02	0.14	0.29	0.45	0.59	0.69	0.74	0.72	0.65	0.53	0.37	0.21	0.07	0.00	0.00	0.00	5.47	0.00
	56	0.00	0.01	0.11	0.30	0.53	0.78	1.01	1.19	1.28	1.27	1.15	0.94	0.70	0.45	0.23	0.06	0.00	0.00	10.0	0.00
	48	0.00	0.04	0.22	0.48	0.81	1.21	1.64	2.05	2.29	2.27	1.98	1.56	1.12	0.72	0.40	0.15	0.02	0.00	17.0	0.24
	40	0.00	0.10	0.34	0.69	1.17	1.87	2.83	3.93	4.67	4.58	3.73	2.63	1.69	1.01	0.56	0.24	0.04	0.00	30.1	17.8
	32	0.01	0.15	0.43	0.88	1.63	2.97	5.21	8.16	10.2	9.90	7.53	4.68	2.61	1.40	0.73	0.32	0.08	0.00	56.9	49.1
	24	0.02	0.18	0.49	1.06	2.22	4.78	9.93	16.7	21.3	20.8	15.8	8.85	4.16	1.90	0.91	0.40	0.12	0.00	110	103
		0.02	0.18	0.51	1.16	2.65	6.49	14.4	23.4	28.0	28.1	23.3	13.8	5.99	2.40	1.05	0.45	0.14	0.00	152	147
		0.02	0.18	0.52	1.20	2.88	7.51	17.2	27.0	30.8	30.9	26.8	16.4	6.91	2.59	1.08	0.45	0.14	0.00	173	167
		0.02	0.18	0.51	1.19	2.84	7.53	17.0	25.9	29.2	29.1	24.8	14.8	6.05	2.28	0.96	0.40	0.10	0.00	163	157
		0.01	0.13	0.42	0.98	2.19	5.22	11.9	20.2	25.2	24.7	19.0	10.5	4.48	1.86	0.84	0.34	0.07	0.00	128	122
	-24	0.00	0.09	0.31	0.71	1.48	2.97	5.83	9.93	13.3	13.2	9.67	5.69	2.86	1.36	0.64	0.25	0.04	0.00	68.3	61.2
-32	0.00	0.04	0.20	0.49	0.96	1.73	2.87	4.34	5.69	5.68	4.28	2.73	1.60	0.88	0.44	0.15	0.02	0.00	32.1	21.6	
-40	0.00	0.01	0.10	0.30	0.57	0.93	1.25	1.49	1.63	1.60	1.40	1.12	0.78	0.48	0.23	0.06	0.00	0.00	12.0	0.00	
-48	0.00	0.00	0.02	0.13	0.28	0.46	0.61	0.70	0.72	0.70	0.64	0.51	0.36	0.19	0.07	0.01	0.00	0.00	5.39	0.00	
-56	0.00	0.00	0.00	0.00	0.03	0.11	0.20	0.28	0.30	0.27	0.22	0.16	0.09	0.03	0.01	0.00	0.00	0.00	1.71	0.00	
-64	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.04	0.05	0.04	0.04	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.27	0.00	
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)					16	24	32	40	48	56	64	72
Φ t	0.09	1.29	4.22	9.72	20.6	45.2	92.6	146	176	174	141	85.2	39.8	17.8	8.20	3.28	0.77	0.01	966	---	
Φ a	0.00	0.00	0.00	0.00	7.61	35.9	84.4	139	168	167	133	77.4	30.6	4.44	0.00	0.00	0.00	0.00	---	847	

one-half-peak spread: U:19.0,D:25.2 , L:23.0,R:20.9 NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2025-08-05
 V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.7V I:0.2062A P:14.36W PF:0.5770 Freq:50.01Hz Lamp Flux:966.241x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080027
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

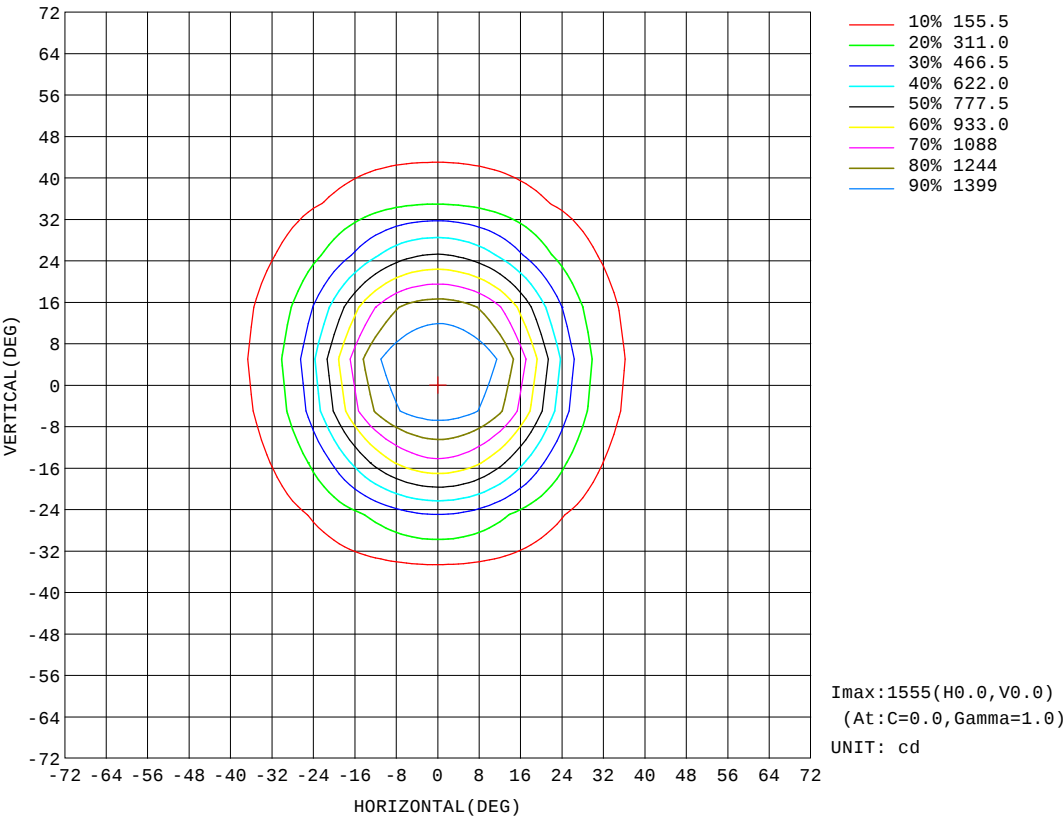


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.7V I:0.2062A P:14.36W PF:0.5770 Freq:50.01Hz Lamp Flux:966.24lx1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080027
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

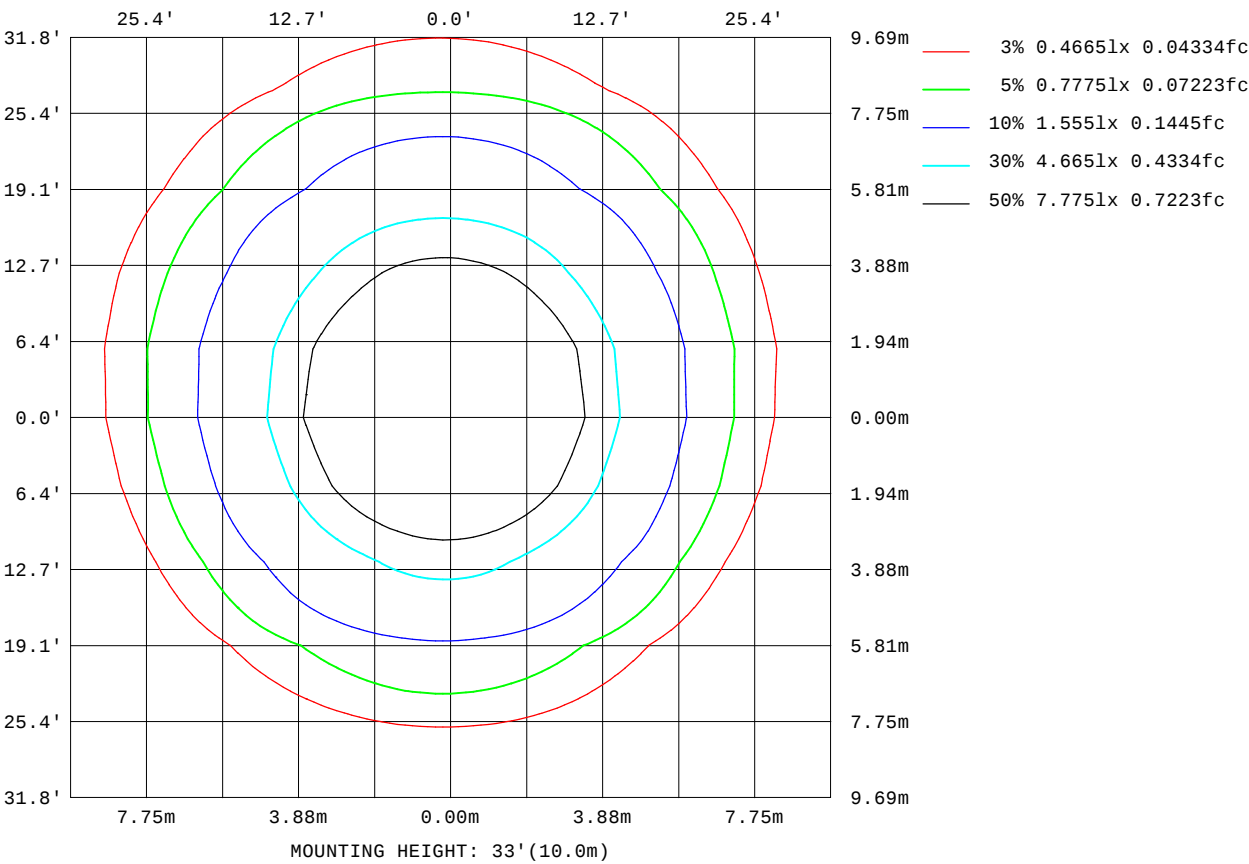

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

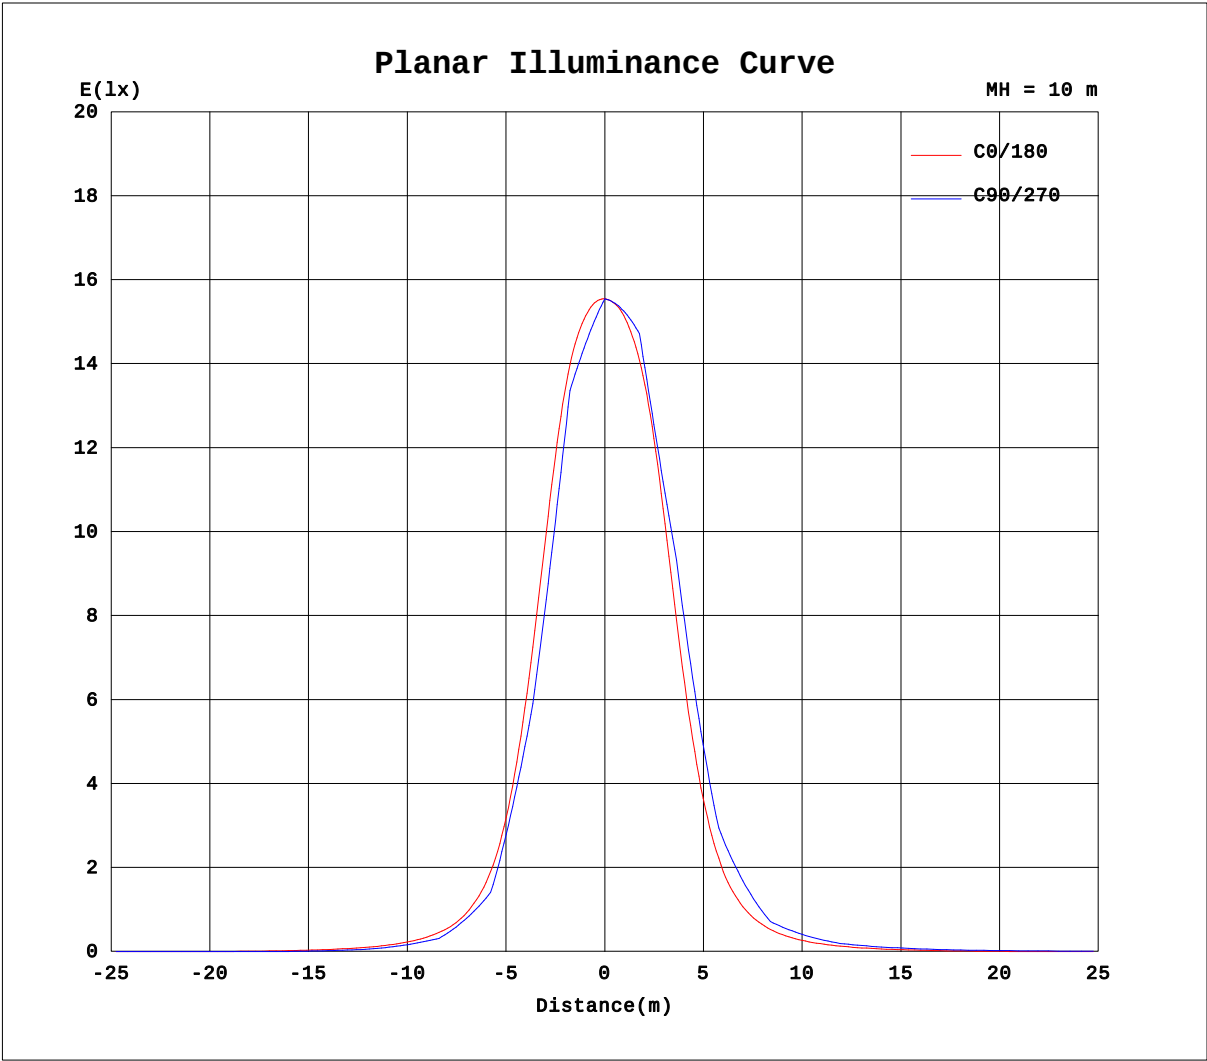


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.7V I:0.2062A P:14.36W PF:0.5770 Freq:50.01Hz Lamp Flux:966.24lx1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080027
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

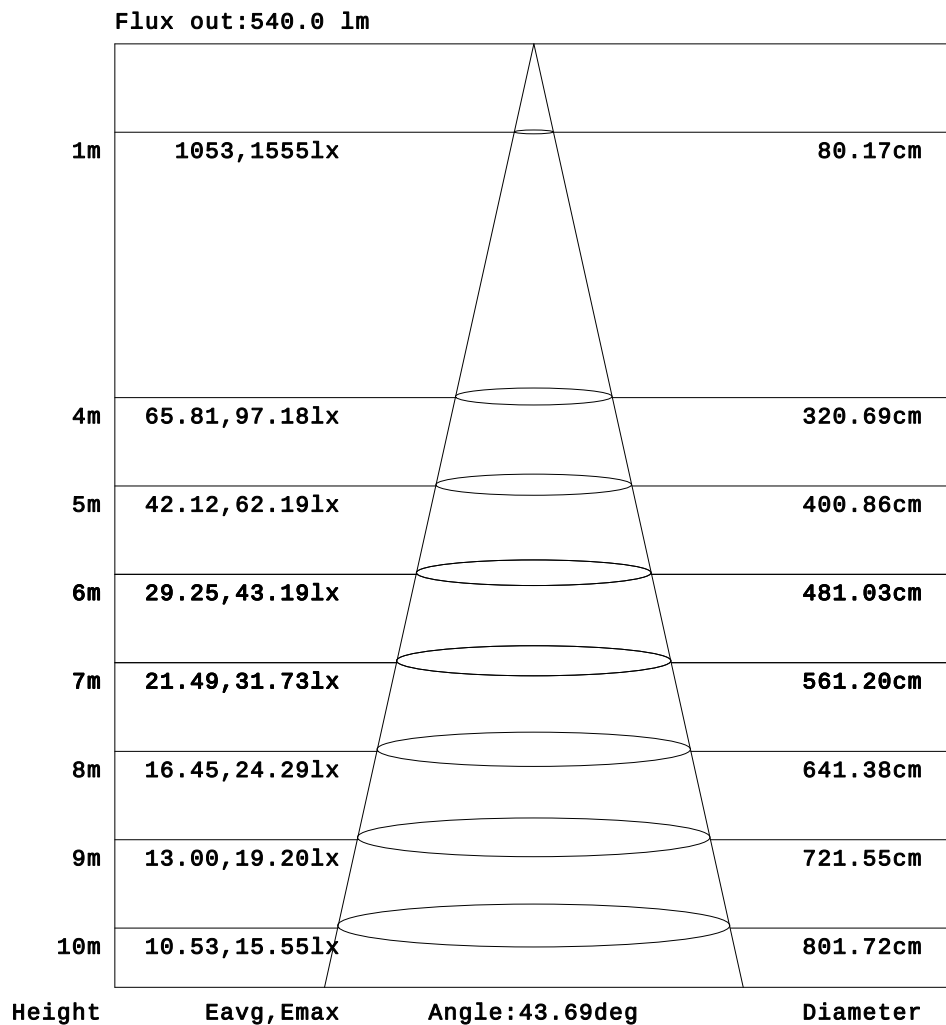

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.7V I:0.2062A P:14.36W PF:0.5770 Freq:50.01Hz Lamp Flux:966.241x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080027
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																		UNIT: cd	
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	2.12	4.37	6.45	8.32	9.98	11.2	11.7	11.6
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.78	5.11	9.64	13.7	17.4	20.6	22.8	23.5	23.0
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.75	6.40	10.0	16.0	22.4	28.7	34.5	39.6	43.8	46.7	47.1
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.33	7.03	14.1	21.4	29.4	37.7	46.1	53.8	60.5	66.3	70.4	71.0
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.32	4.33	11.6	20.4	30.2	41.8	55.8	72.0	89.5	107	125	140	145
-30	0.00	0.00	0.00	0.00	0.00	0.00	2.08	10.4	19.6	30.4	43.3	59.5	80.1	105	132	161	190	213	218
-25	0.00	0.00	0.00	0.00	0.00	0.00	4.32	13.4	23.7	36.6	53.7	77.0	110	157	221	298	376	440	465
-20	0.00	0.00	0.00	0.00	0.00	0.76	9.96	20.3	32.4	48.9	72.2	106	157	233	341	466	591	686	711
-15	0.00	0.00	0.00	0.00	0.00	1.08	10.3	21.4	35.1	53.6	80.5	122	193	311	488	697	883	1007	1055
-10	0.00	0.00	0.00	0.00	0.00	4.16	14.8	27.6	44.3	67.5	102	161	268	452	719	1008	1236	1360	1397
-5	0.00	0.00	0.00	0.00	0.00	3.56	14.6	27.7	44.3	67.6	104	166	282	488	788	1105	1331	1439	1476
0	0.00	0.00	0.00	0.00	0.00	7.17	19.1	33.7	52.4	79.6	124	206	364	633	987	1312	1485	1543	1555
5	0.00	0.00	0.00	0.00	0.00	5.32	17.2	31.1	48.5	73.5	113	184	315	546	873	1210	1431	1522	1547
10	0.00	0.00	0.00	0.00	0.00	8.02	20.4	34.7	53.0	80.3	124	202	343	578	899	1220	1431	1518	1541
15	0.00	0.00	0.00	0.00	0.00	5.39	17.1	30.6	47.1	70.1	105	163	262	430	672	945	1168	1293	1332
20	0.00	0.00	0.00	0.00	0.00	7.31	18.9	32.4	49.0	71.5	104	155	236	368	554	772	971	1095	1121
25	0.00	0.00	0.00	0.00	0.00	3.57	14.3	26.4	41.1	59.3	83.8	119	173	257	374	518	659	757	789
30	0.00	0.00	0.00	0.00	0.00	4.02	14.2	25.9	39.8	55.7	75.9	103	138	187	249	323	396	441	452
35	0.00	0.00	0.00	0.00	0.00	1.03	9.36	19.6	31.8	45.2	60.7	80.0	104	136	174	220	265	296	307
40	0.00	0.00	0.00	0.00	0.00	0.35	8.37	17.8	28.9	40.4	52.5	66.3	81.7	98.6	117	135	150	159	160
45	0.00	0.00	0.00	0.00	0.00	0.00	3.42	11.2	20.5	30.3	40.4	51.2	62.8	74.7	86.9	98.9	109	116	117
50	0.00	0.00	0.00	0.00	0.00	0.00	1.05	8.03	16.1	24.2	32.3	40.8	48.5	55.9	62.0	67.5	71.6	73.9	74.1
55	0.00	0.00	0.00	0.00	0.00	0.00	0.09	3.28	8.53	15.5	22.2	29.0	35.5	41.4	46.4	50.6	53.8	55.7	56.2
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.75	9.45	14.7	19.8	24.8	29.2	32.7	35.3	37.1	38.0	38.0
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.31	4.17	6.83	10.0	14.0	17.6	20.6	22.8	24.4	25.2	25.3
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.81	4.68	7.34	9.57	11.2	12.2	12.6	12.4
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.62	2.06	3.42	4.58	5.45	6.03	6.31	6.26
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.7V I:0.2062A P:14.36W PF:0.5770 Freq:50.01Hz Lamp Flux:966.241x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080027
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	10.9	9.80	8.56	7.08	5.38	3.62	1.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	21.4	19.2	16.6	13.5	10.1	6.54	2.77	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	45.7	42.4	37.6	31.7	25.7	19.6	13.7	8.28	4.83	1.61	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	68.9	64.1	56.5	47.5	38.9	30.3	22.3	15.2	8.35	1.97	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	139	124	105	85.2	66.6	50.6	37.6	26.8	17.4	8.82	2.83	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	204	177	146	115	87.5	65.2	48.3	34.5	22.8	12.5	4.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	441	374	291	214	151	104	71.9	50.0	33.8	20.5	9.74	1.88	0.00	0.00	0.00	0.00	0.00	0.00
-20	657	539	403	285	193	127	85.6	58.3	39.1	23.7	11.6	1.99	0.00	0.00	0.00	0.00	0.00	0.00
-15	1012	886	694	485	308	187	117	76.7	50.9	32.5	18.1	6.46	0.00	0.00	0.00	0.00	0.00	0.00
-10	1329	1164	901	606	367	213	129	83.0	54.5	35.2	19.5	6.94	0.00	0.00	0.00	0.00	0.00	0.00
-5	1446	1341	1112	788	484	275	160	98.6	63.8	41.3	24.7	11.0	0.58	0.00	0.00	0.00	0.00	0.00
0	1536	1448	1201	838	502	278	160	97.5	62.5	40.2	24.0	10.4	0.07	0.00	0.00	0.00	0.00	0.00
5	1532	1447	1221	875	541	305	176	108	69.3	44.6	27.5	13.8	1.93	0.00	0.00	0.00	0.00	0.00
10	1508	1382	1114	768	468	267	158	99.2	64.6	41.3	25.3	12.2	0.77	0.00	0.00	0.00	0.00	0.00
15	1295	1176	951	670	423	253	154	98.9	65.8	42.9	26.4	13.6	2.16	0.00	0.00	0.00	0.00	0.00
20	1050	897	678	462	297	190	123	82.8	56.6	37.0	22.1	10.4	0.27	0.00	0.00	0.00	0.00	0.00
25	750	655	512	366	248	166	112	77.8	54.4	36.5	21.9	10.6	0.85	0.00	0.00	0.00	0.00	0.00
30	421	362	287	218	160	117	85.7	62.0	44.4	29.6	16.8	6.75	0.00	0.00	0.00	0.00	0.00	0.00
35	293	259	214	170	131	99.2	74.7	55.2	40.1	27.0	15.1	5.79	0.03	0.00	0.00	0.00	0.00	0.00
40	153	140	123	105	87.2	70.3	55.0	41.9	30.4	19.4	9.41	1.26	0.00	0.00	0.00	0.00	0.00	0.00
45	114	106	95.7	83.5	70.8	58.2	46.3	35.2	25.5	15.9	7.06	1.45	0.00	0.00	0.00	0.00	0.00	0.00
50	72.4	68.6	63.3	56.7	49.2	41.3	32.9	24.5	16.8	8.68	1.68	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	55.0	52.4	48.6	43.7	37.9	31.5	24.7	17.8	11.3	5.14	1.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	36.8	34.9	32.0	28.4	24.0	19.1	13.7	8.57	3.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	24.5	23.0	20.8	18.0	14.5	10.6	7.41	4.80	2.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	11.7	10.4	8.58	6.27	3.56	0.52	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	5.94	5.33	4.49	3.38	2.07	0.56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: