

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	1804.0 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	69.9V x 69.1H
	At 50% of Imax	43.3V x 42.9H
	At 90% of Imax	22.8V x 23.7H

Beam Flux	Total	997.7 lumens per klm.
	To 10% of Imax	920.9 lumens per klm.
	To 50% of Imax	607.5 lumens per klm.
	To 90% of Imax	208.9 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.9V I:0.1024A P:13.99W PF:0.4917 Freq:50.00Hz Lamp Flux:271.918x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080032
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

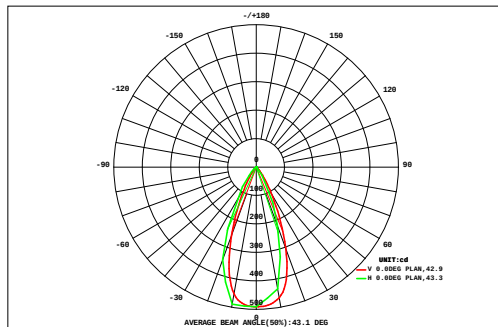

DATA OF LAMP		Eff:19.43lm/W	
MODEL: SP-PZT-R170-12P-RDM-B		Imax(cd)	490.5
NOMINAL POWER(W)	14	AVAILABILITY(%)	92.6
RATED VOLTAGE(V)	277	Avai. FLUX(lm)	251.8
NOMINAL FLUX(lm)	271.918	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	271.9
TEST VOLTAGE(V)	277	θ @50%(H,V)	43,43DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM															UNIT:lm				Φ t	Φ a
	45	0.00	0.02	0.04	0.08	0.11	0.15	0.19	0.22	0.24	0.24	0.22	0.19	0.15	0.11	0.07	0.04	0.01	0.00	2.08	0.00
	40	0.01	0.04	0.08	0.13	0.18	0.24	0.29	0.33	0.35	0.34	0.30	0.26	0.20	0.15	0.10	0.05	0.01	0.00	3.05	0.17
	35	0.03	0.07	0.12	0.20	0.31	0.44	0.60	0.74	0.81	0.80	0.72	0.59	0.44	0.31	0.20	0.12	0.06	0.02	6.56	5.27
	30	0.05	0.11	0.19	0.31	0.47	0.67	0.90	1.09	1.17	1.12	0.97	0.77	0.56	0.38	0.24	0.14	0.07	0.02	9.22	8.10
	25	0.06	0.13	0.25	0.44	0.73	1.13	1.58	1.96	2.19	2.19	1.97	1.59	1.13	0.72	0.42	0.23	0.12	0.05	16.9	16.0
	20	0.10	0.20	0.37	0.66	1.11	1.70	2.32	2.79	3.03	2.94	2.58	2.00	1.35	0.82	0.46	0.25	0.12	0.05	22.9	22.1
	15	0.08	0.18	0.37	0.71	1.26	1.98	2.69	3.17	3.41	3.44	3.26	2.79	2.04	1.28	0.72	0.37	0.18	0.08	28.0	27.3
	10	0.12	0.26	0.54	1.03	1.80	2.71	3.47	3.86	3.98	3.97	3.73	3.12	2.20	1.33	0.71	0.35	0.16	0.07	33.4	32.8
	5	0.08	0.19	0.41	0.81	1.47	2.32	3.10	3.53	3.70	3.73	3.62	3.23	2.47	1.58	0.86	0.42	0.20	0.08	31.8	31.2
	0	0.12	0.26	0.54	1.06	1.84	2.74	3.38	3.65	3.73	3.72	3.57	3.09	2.25	1.36	0.70	0.33	0.15	0.05	32.5	31.9
	-5	0.06	0.15	0.32	0.63	1.18	1.91	2.65	3.15	3.38	3.39	3.20	2.74	2.04	1.29	0.70	0.35	0.16	0.06	27.4	26.7
	-10	0.08	0.17	0.35	0.68	1.22	1.88	2.52	2.98	3.19	3.12	2.78	2.13	1.42	0.82	0.43	0.21	0.09	0.03	24.1	23.4
	-15	0.03	0.08	0.18	0.35	0.62	1.01	1.44	1.82	2.04	2.06	1.88	1.53	1.09	0.70	0.39	0.20	0.09	0.03	15.5	14.7
	-20	0.02	0.08	0.16	0.28	0.44	0.65	0.90	1.14	1.25	1.20	0.97	0.67	0.43	0.27	0.16	0.08	0.03	0.00	8.73	7.63
	-25	0.00	0.02	0.07	0.13	0.23	0.35	0.50	0.64	0.74	0.75	0.68	0.55	0.39	0.25	0.14	0.07	0.02	0.01	5.54	4.32
	-30	0.00	0.00	0.03	0.06	0.09	0.11	0.14	0.17	0.17	0.15	0.13	0.10	0.08	0.05	0.02	0.00	0.00	0.00	1.30	0.14
	-35	0.00	0.00	0.01	0.02	0.04	0.07	0.11	0.14	0.16	0.16	0.15	0.12	0.08	0.05	0.02	0.01	0.00	0.00	1.15	0.00
	-40	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.00
-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45		
Φ t	0.84	1.99	4.04	7.58	13.1	20.1	26.8	31.4	33.6	33.3	30.7	25.5	18.3	11.4	6.33	3.22	1.47	0.55	270	---	
Φ a	0.00	0.19	2.49	6.40	12.2	19.3	26.0	30.6	32.8	32.5	29.9	24.8	17.6	10.4	5.22	1.44	0.00	0.00	---	252	

one-half-peak spread: U:18.7,D:24.8 , L:22.6,R:20.5


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:277.9V I:0.1024A P:13.99W PF:0.4917 Freq:50.00Hz Lamp Flux:271.918x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080032
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

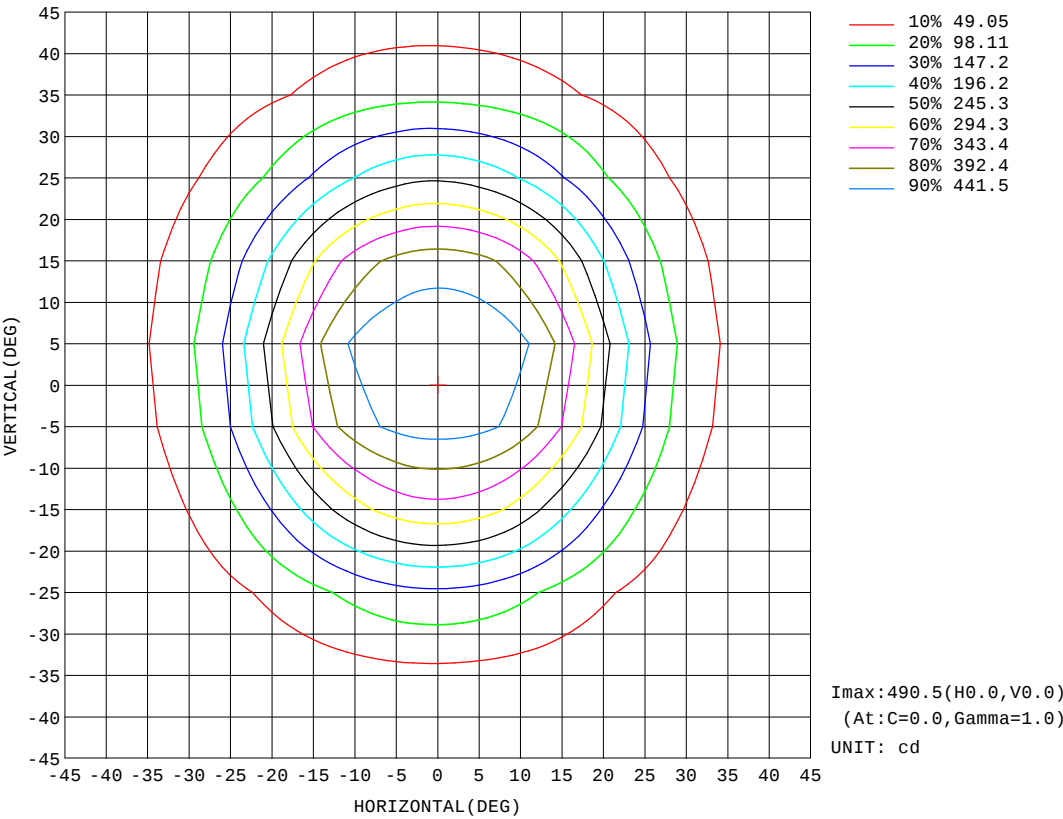


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:277.9V I:0.1024A P:13.99W PF:0.4917 Freq:50.00Hz Lamp Flux:271.918x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080032
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

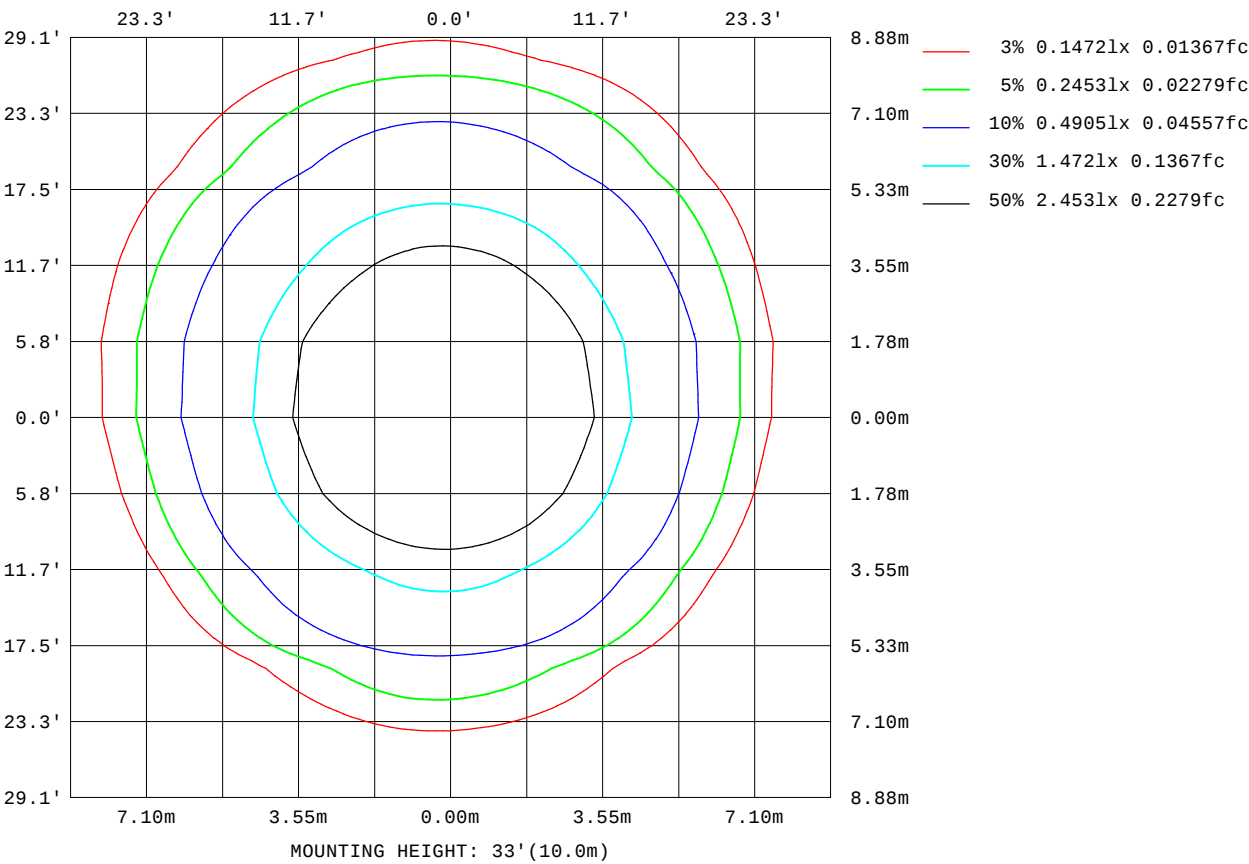

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

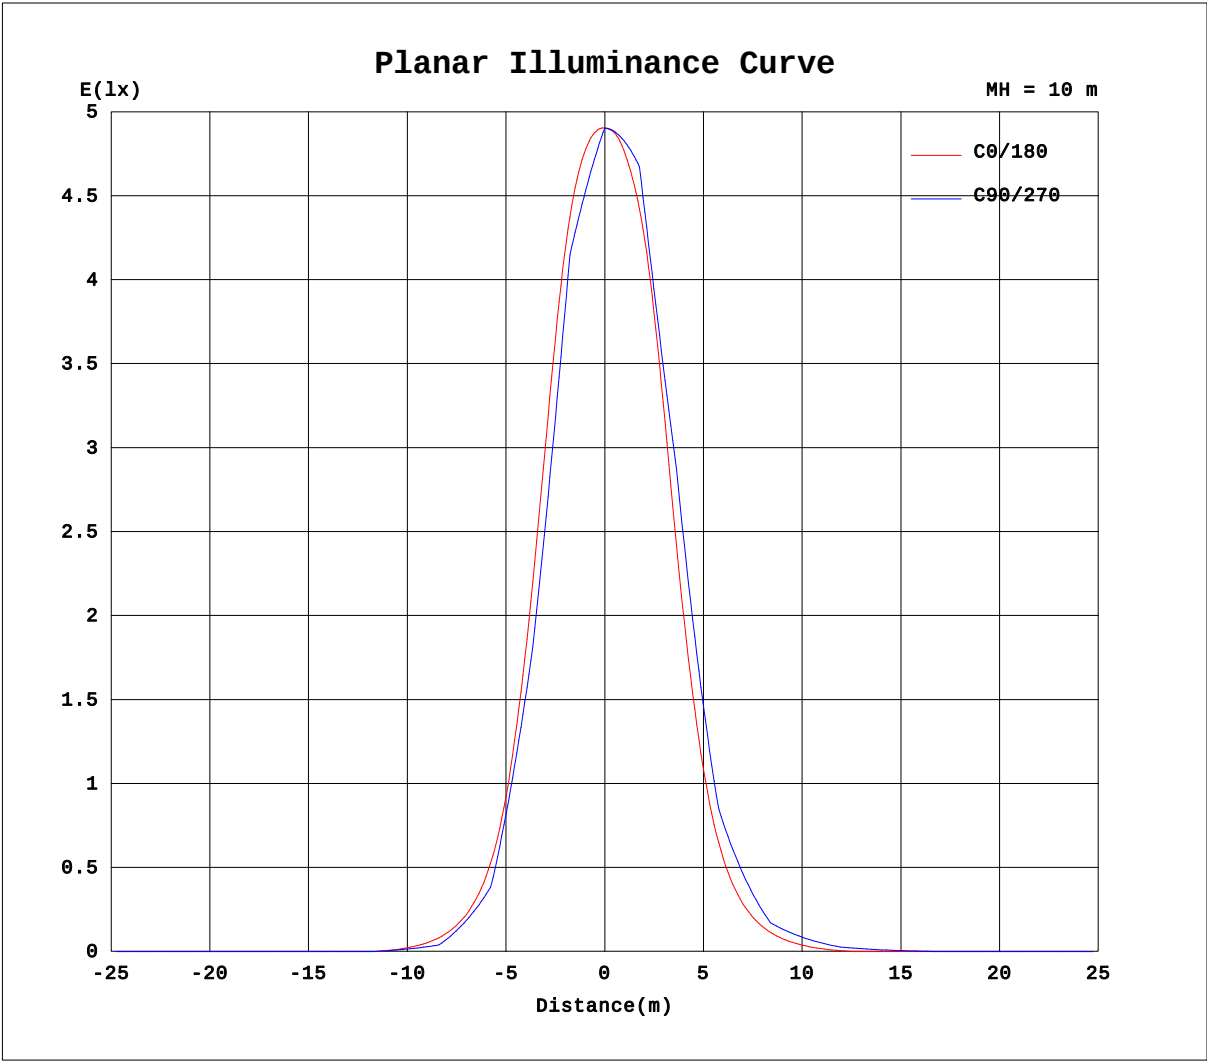


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.9V I:0.1024A P:13.99W PF:0.4917 Freq:50.00Hz Lamp Flux:271.918x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080032
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

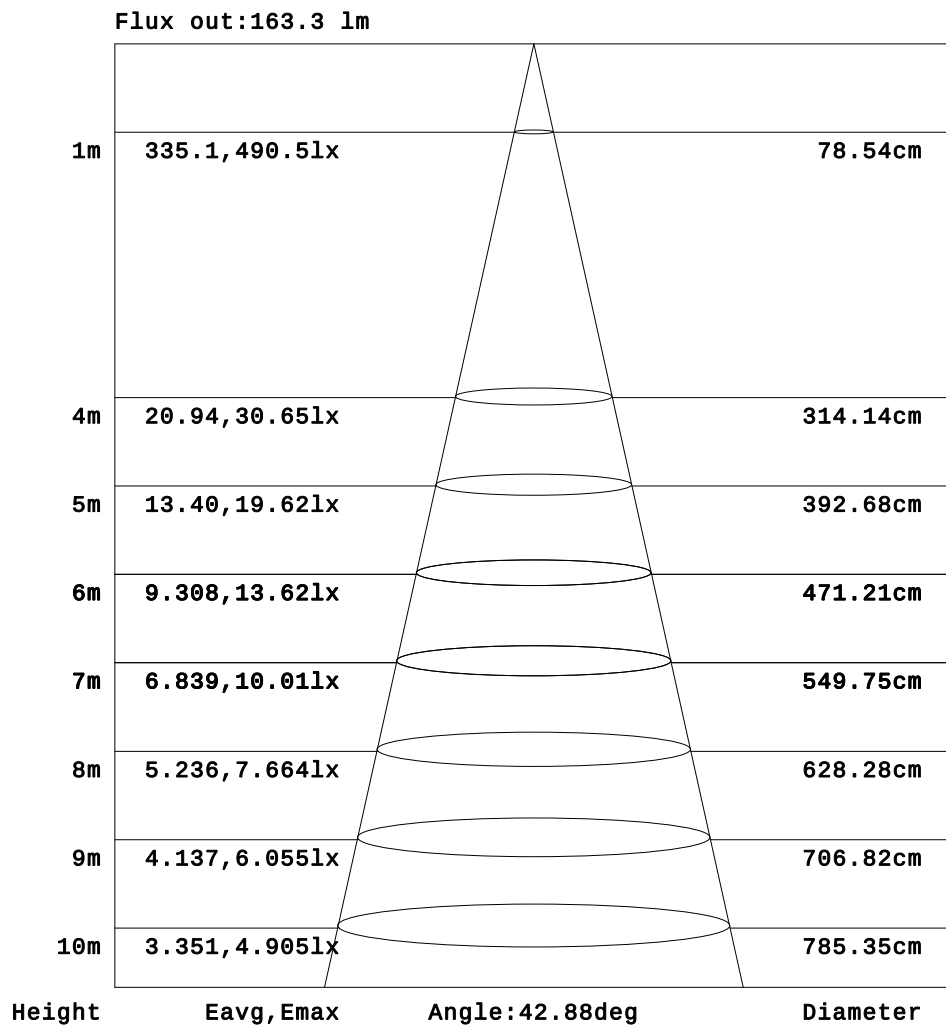

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.9V I:0.1024A P:13.99W PF:0.4917 Freq:50.00Hz Lamp Flux:271.918x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080032
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1		UNIT: cd																	
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	1.40	2.55	3.53	4.24	4.47
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.75	3.28	5.52	7.42	8.65	8.96
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.00	5.30	9.35	15.2	21.4	27.7	32.8	34.1
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	5.22	12.1	20.2	29.6	39.8	50.4	58.2	58.9
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.30	3.93	11.3	22.5	38.4	59.8	85.7	112	132	139
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.82	9.69	21.3	38.6	64.3	99.9	142	183	212	219
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.44	12.5	26.9	51.0	90.8	149	216	275	314	327
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.52	8.09	20.1	40.4	76.5	138	225	316	387	426	434
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.79	8.18	20.6	42.0	80.7	147	243	345	417	452	462
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.99	12.3	27.7	55.6	107	192	302	409	466	487	491
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.71	10.2	23.9	47.8	91.0	165	268	376	450	481	490
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.23	12.5	27.5	53.4	99.4	176	278	381	452	481	489
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.23	9.03	20.9	40.3	73.3	127	204	291	363	403	418
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.83	9.51	20.7	37.8	64.9	106	165	234	296	336	345
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.31	5.42	13.8	25.8	43.7	70.1	107	153	197	228	239
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.24	11.0	19.9	31.6	46.8	66.6	90.2	113	128	130
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.54	5.94	12.4	20.4	30.3	42.7	57.2	71.8	81.9	84.8
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.21	7.82	12.9	18.4	24.3	30.3	35.3	38.2	38.5
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.18	3.43	6.67	10.6	14.6	18.6	22.0	24.1	24.5
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.02	4.44	6.50	8.32	9.68	10.4	10.4
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.75	2.00	3.06	3.99	4.72	5.16	5.23
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.9V I:0.1024A P:13.99W PF:0.4917 Freq:50.00Hz Lamp Flux:271.918x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080032
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																		UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	4.27	3.58	2.42	0.94	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	8.36	6.80	4.27	1.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-35	31.8	27.0	20.7	13.8	7.91	3.96	1.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-30	53.6	44.9	34.3	23.6	14.1	6.60	1.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-25	131	110	82.2	56.0	34.8	19.4	8.90	3.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-20	202	164	119	79.0	48.5	27.2	13.4	4.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-15	314	274	210	143	85.7	46.8	23.8	10.4	2.36	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-10	414	362	275	182	104	55.1	27.6	12.3	3.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-5	454	419	342	239	143	75.2	37.8	17.5	6.10	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
0	485	453	370	254	148	76.5	37.8	17.1	5.66	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
5	485	453	376	263	159	85.0	43.1	20.6	7.91	0.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
10	478	431	340	227	134	72.5	37.1	17.8	6.40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
15	405	363	289	197	120	67.7	36.0	17.8	6.93	0.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
20	321	271	202	133	81.3	47.4	25.9	12.5	4.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
25	225	194	150	103	66.0	39.9	22.6	11.0	3.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
30	119	101	79.0	57.0	38.4	24.4	13.8	5.83	0.34	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
35	79.5	68.9	55.5	41.6	28.8	18.5	10.3	3.76	0.59	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
40	36.1	31.9	26.5	20.7	14.7	9.01	3.83	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
45	23.4	20.9	17.5	13.5	9.31	5.13	2.41	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
50	9.87	8.62	6.89	4.74	2.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	5.02	4.46	3.64	2.60	1.38	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: