


Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)		1750.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	70.6V x 70.0H
	At 50% of Imax	43.4V x 43.1H
	At 90% of Imax	23.4V x 24.2H
Beam Flux	Total	998.6 lumens per klm.
	To 10% of Imax	903.7 lumens per klm.
	To 50% of Imax	594.9 lumens per klm.
	To 90% of Imax	212.1 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.9V I:0.0871A P:11.10W PF:0.4587 Freq:50.01Hz Lamp Flux:449.675x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080030
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

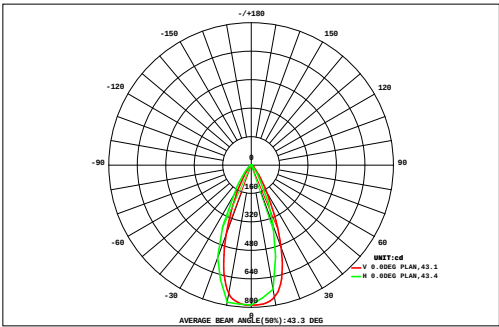

DATA OF LAMP		Eff:40.49lm/W	
MODEL:SP-PZT-R170-12P-RDM-R		Imax(cd)	787.3
NOMINAL POWER(W)	11	AVAILABILITY(%)	90.7
RATED VOLTAGE(V)	277	Avai. FLUX(lm)	408.0
NOMINAL FLUX(lm)	449.675	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	449.7
TEST VOLTAGE(V)	277	θ @50%(H,V)	43,43DEG

AREA FLUX DIAGRAM																	UNIT:lm	Φ t	Φ a
72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00
64	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.11	0.12	0.12	0.09	0.04	0.00	0.00	0.00	0.00	0.00	0.55	0.00
56	0.00	0.00	0.00	0.01	0.08	0.16	0.26	0.33	0.38	0.37	0.32	0.23	0.13	0.04	0.00	0.00	0.00	2.30	0.00
48	0.00	0.00	0.00	0.06	0.20	0.37	0.56	0.74	0.86	0.85	0.73	0.53	0.33	0.15	0.04	0.00	0.00	5.43	0.00
40	0.00	0.00	0.02	0.16	0.38	0.69	1.13	1.64	1.99	1.97	1.56	1.05	0.61	0.31	0.10	0.01	0.00	11.6	4.93
32	0.00	0.00	0.07	0.25	0.60	1.21	2.27	3.67	4.66	4.55	3.38	2.04	1.06	0.50	0.19	0.02	0.00	24.5	21.0
24	0.00	0.00	0.09	0.34	0.88	2.11	4.65	8.12	10.4	10.2	7.59	4.16	1.82	0.75	0.28	0.05	0.00	51.5	48.9
	0.00	0.00	0.11	0.40	1.11	2.99	7.01	11.7	14.1	14.2	11.6	6.72	2.75	0.99	0.35	0.08	0.00	74.1	71.9
	0.00	0.01	0.11	0.42	1.24	3.54	8.49	13.7	15.7	15.7	13.5	8.10	3.24	1.09	0.36	0.08	0.00	85.2	83.1
	0.00	0.01	0.11	0.42	1.25	3.59	8.45	13.1	14.8	14.8	12.5	7.29	2.85	0.94	0.31	0.06	0.00	80.5	78.4
	0.00	0.00	0.08	0.32	0.90	2.43	5.88	10.2	12.8	12.6	9.62	5.19	2.09	0.74	0.25	0.04	0.00	63.2	60.8
	0.00	0.00	0.03	0.19	0.55	1.28	2.77	4.93	6.63	6.61	4.81	2.68	1.24	0.49	0.16	0.02	0.00	32.4	29.5
-24	0.00	0.00	0.01	0.09	0.29	0.66	1.24	2.01	2.68	2.70	1.99	1.17	0.60	0.25	0.06	0.00	0.00	13.8	9.40
-32	0.00	0.00	0.00	0.02	0.11	0.26	0.41	0.51	0.61	0.60	0.51	0.35	0.19	0.06	0.01	0.00	0.00	3.64	0.00
-40	0.00	0.00	0.00	0.00	0.01	0.06	0.10	0.13	0.15	0.15	0.13	0.08	0.03	0.00	0.00	0.00	0.00	0.83	0.00
-48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.06	0.00
-56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72		
Φ t	0.00	0.02	0.63	2.69	7.57	19.4	43.3	71.0	86.0	85.4	68.4	39.6	17.0	6.33	2.10	0.37	0.00	0.00	450
Φ a	0.00	0.00	0.00	0.00	2.25	15.5	40.3	67.9	83.0	82.4	65.6	36.7	13.1	1.17	0.00	0.00	0.00	0.00	408


one-half-peak spread: U:19.0,D:24.7 , L:22.7,Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:277.9V I:0.0871A P:11.10W PF:0.4587 Freq:50.01Hz Lamp Flux:449.675x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080030
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

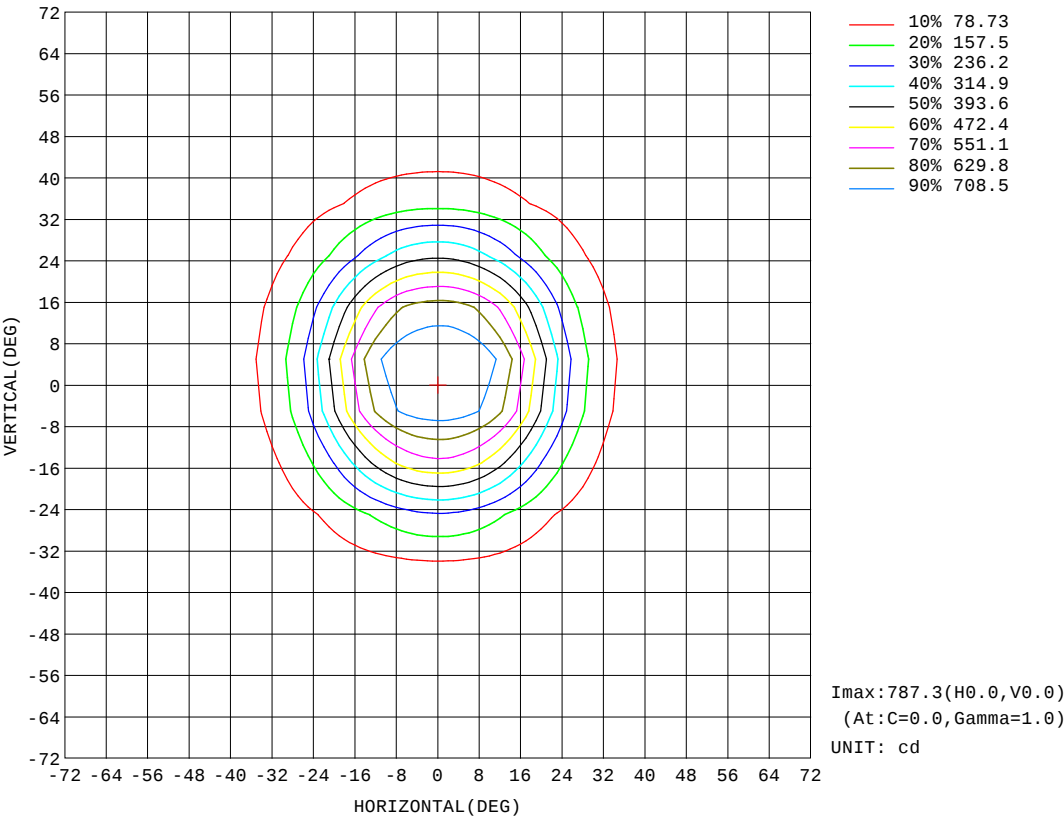


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:277.9V I:0.0871A P:11.10W PF:0.4587 Freq:50.01Hz Lamp Flux:449.675x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080030
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

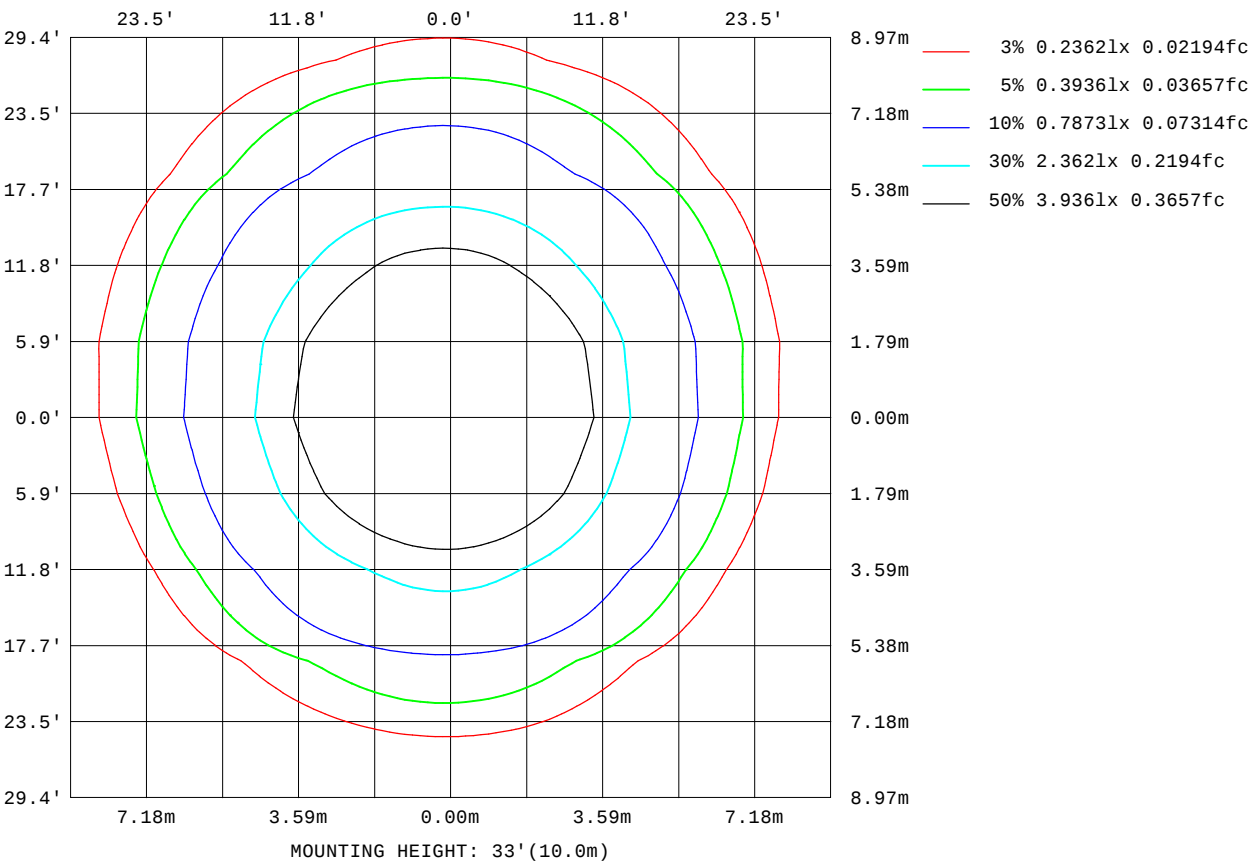

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

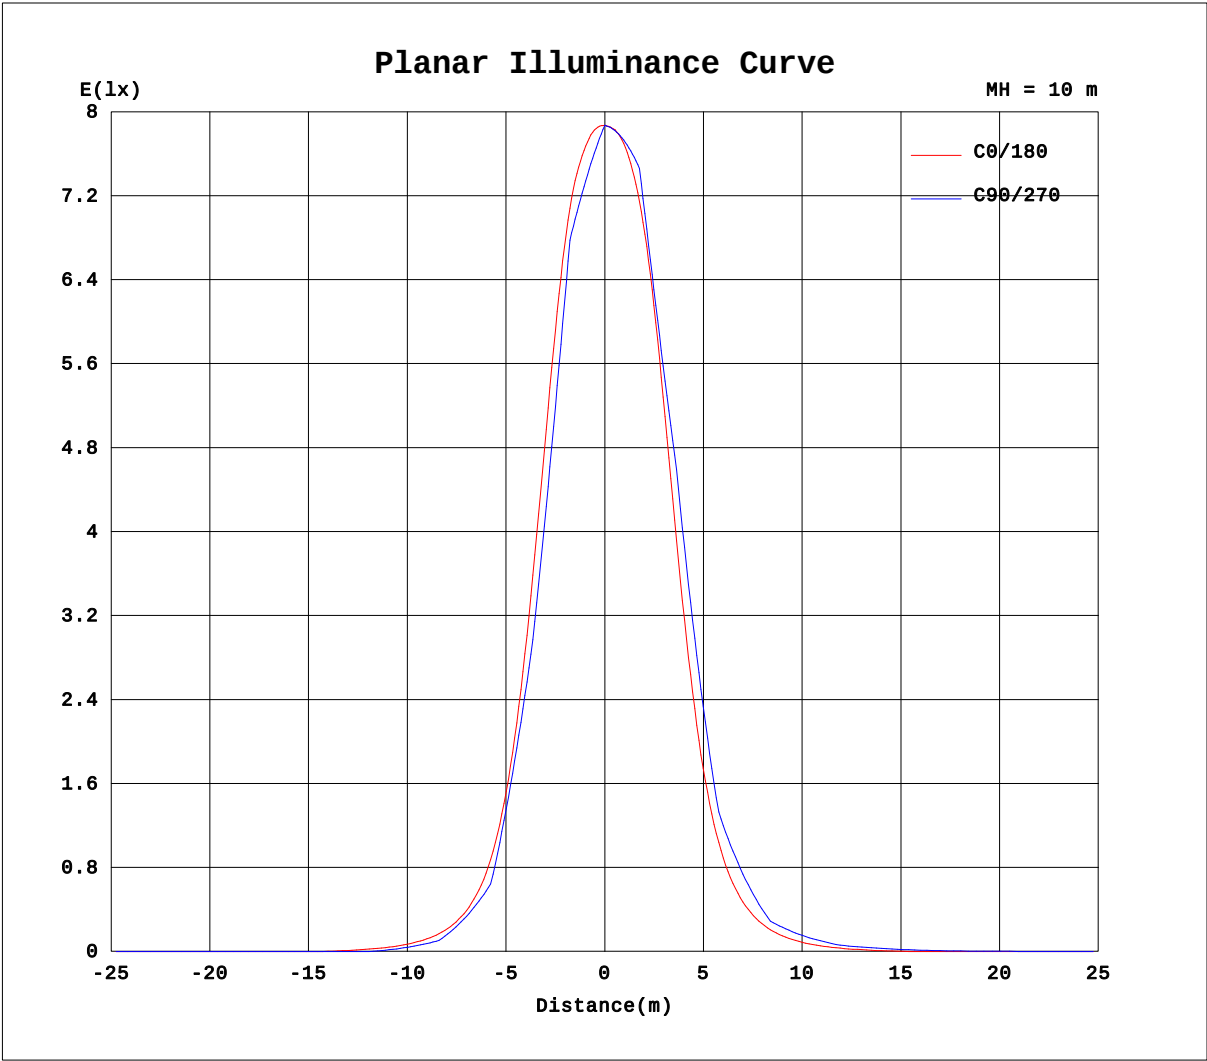


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.9V I:0.0871A P:11.10W PF:0.4587 Freq:50.01Hz Lamp Flux:449.675x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080030
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

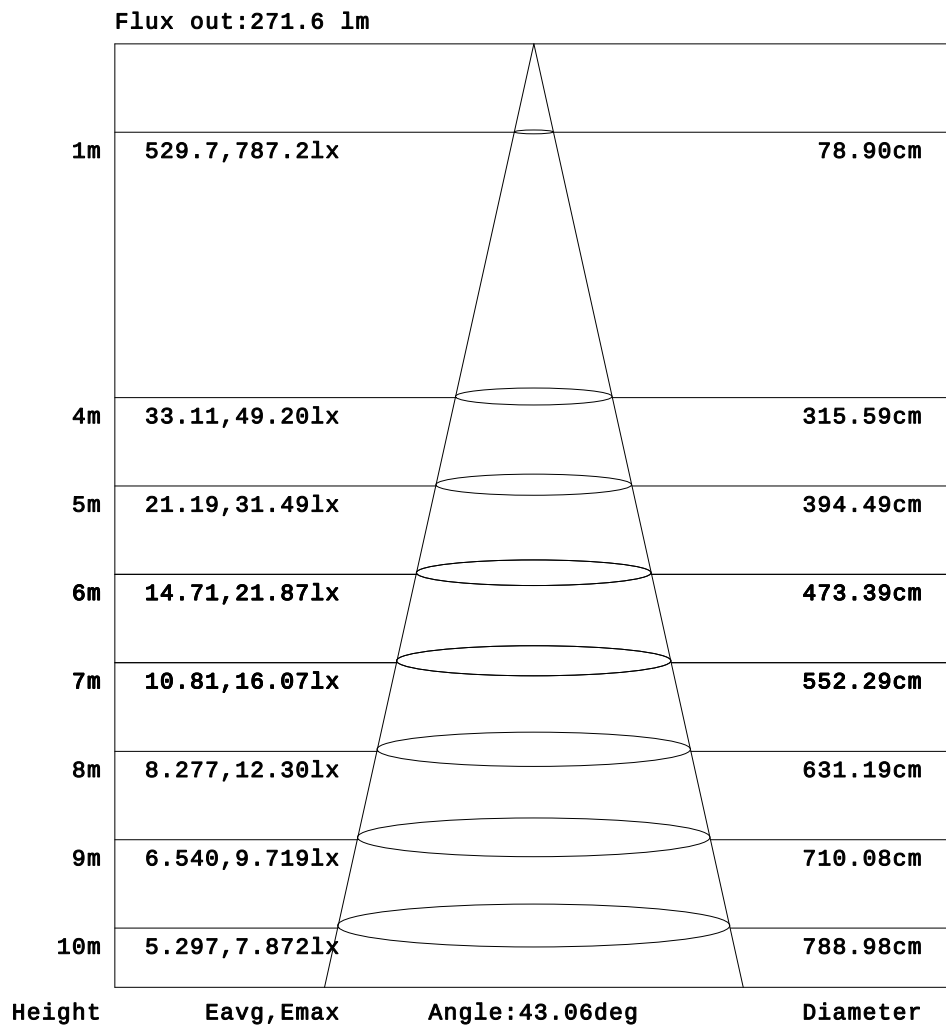

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.9V I:0.0871A P:11.10W PF:0.4587 Freq:50.01Hz Lamp Flux:449.675x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080030
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd			
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.34	3.19	5.22	7.08	8.79	10.2	11.4	11.9	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	3.36	7.19	11.2	14.9	18.2	21.0	23.0	23.8	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.59	4.33	9.32	16.1	24.2	33.2	42.4	51.3	58.5	61.4	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.16	9.95	17.7	28.0	40.6	55.2	70.2	84.9	96.0	99.1	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.83	6.97	15.0	26.4	43.1	67.1	101	142	182	215	228	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.85	12.6	24.0	40.7	66.4	105	162	231	294	343	358	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.67	6.22	14.8	28.0	48.9	84.4	146	238	348	446	510	534	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.72	10.5	21.6	39.0	68.4	122	218	357	508	629	693	709	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.58	10.3	21.4	39.4	71.2	130	234	390	555	675	732	748	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.25	13.8	27.0	49.7	91.9	171	307	491	660	754	784	787	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.92	11.8	23.9	43.9	79.2	145	261	430	605	725	773	784	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.40	13.8	27.3	49.1	86.8	157	277	442	610	725	770	781	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.31	10.8	22.1	39.2	67.0	115	200	323	464	582	647	667	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.95	11.7	22.5	38.4	62.6	102	166	260	373	474	538	552	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.37	8.05	16.7	28.5	45.7	71.4	111	170	242	312	363	379	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.87	7.58	14.8	24.7	37.4	54.3	77.1	107	142	176	199	204	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	3.64	9.85	17.3	26.5	38.1	52.7	71.1	92.4	114	129	135	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.16	7.56	13.3	19.9	27.1	35.1	43.5	51.9	59.0	63.5	64.7	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.55	3.24	7.53	12.8	18.2	23.9	29.5	35.0	39.8	43.0	44.1	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	3.74	7.88	11.5	14.9	17.7	20.2	22.2	23.3	23.5	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.47	3.53	5.43	8.02	10.3	12.3	13.8	14.8	15.0	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.15	2.16	3.80	5.04	5.92	6.38	6.42	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.89	1.75	2.41	2.88	3.16	3.23	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.9V I:0.0871A P:11.10W PF:0.4587 Freq:50.01Hz Lamp Flux:449.675x1 lm		
NAME: 8.03.034.0002 45° SP-PZT-R170-12P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080030
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	11.6	10.7	8.89	6.45	4.20	2.10	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	23.0	20.9	16.9	12.0	7.56	3.40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	58.9	52.0	41.9	31.3	21.6	13.5	7.13	3.52	0.68	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	92.5	79.5	62.6	46.5	32.2	20.8	12.4	5.85	0.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	217	183	139	96.3	64.0	40.3	24.1	13.4	5.50	1.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	330	270	197	132	85.1	52.3	30.9	17.4	8.04	0.85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	513	448	348	235	145	83.4	46.9	26.2	13.6	4.89	0.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	676	592	454	298	175	96.4	52.6	29.1	15.3	5.99	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	734	681	559	390	233	127	67.8	36.8	19.7	8.89	1.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	778	733	600	413	241	127	67.2	36.0	19.1	8.39	0.70	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	776	732	610	431	258	141	75.2	40.9	22.1	10.3	2.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	765	695	552	376	219	120	65.8	36.5	19.7	8.63	0.95	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	649	584	467	323	196	113	64.1	36.4	20.2	9.35	1.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	516	433	325	216	133	81.1	48.7	28.6	15.8	6.49	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	361	309	239	167	109	69.2	43.3	26.1	14.6	6.11	0.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	191	160	125	92.4	65.7	45.2	29.8	18.3	9.78	2.67	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	129	112	90.4	69.5	51.3	36.2	24.4	15.0	7.70	2.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	61.9	55.6	47.4	38.7	30.2	22.2	14.9	8.54	3.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	42.9	39.2	34.0	28.3	22.3	16.4	10.6	5.27	2.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	22.7	21.0	18.5	15.4	11.9	8.19	4.03	0.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	14.5	13.3	11.5	9.18	6.48	4.49	2.43	0.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	5.86	4.98	3.64	1.89	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	3.00	2.59	1.97	1.14	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: