

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2001.9 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	65.3V x 65.2H
	At 50% of Imax	42.6V x 42.4H
	At 90% of Imax	22.6V x 24.5H
Beam Flux	Total	993.8 lumens per klm.
	To 10% of Imax	943.6 lumens per klm.
	To 50% of Imax	644.4 lumens per klm.
	To 90% of Imax	232.2 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.4 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.9V I:0.1325A P:8.811W PF:0.5498 Freq:49.99Hz Lamp Flux:127.069x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070089
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

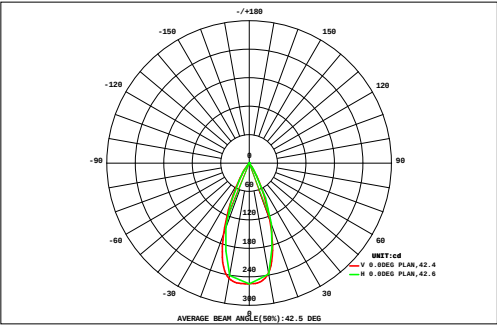

DATA OF LAMP		Eff:14.42lm/W	
MODE	SP-PZT-R135-6P-RDM-B	Imax(cd)	254.4
NOMINAL POWER(W)	9	AVAILABILITY(%)	95.8
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	121.8
NOMINAL FLUX(lm)	127.069	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	127.1
TEST VOLTAGE(V)	120	θ @50%(H,V)	42,43DEG

AREA FLUX DIAGRAM																	UNIT:lm	Φ t	Φ a
45	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.03	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.15	0.00
40	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.05	0.05	0.04	0.03	0.01	0.00	0.00	0.00	0.00	0.25	0.00
35	0.00	0.00	0.00	0.01	0.05	0.09	0.14	0.20	0.25	0.26	0.24	0.20	0.14	0.09	0.05	0.01	0.00	1.72	1.00
30	0.00	0.00	0.00	0.03	0.09	0.17	0.26	0.34	0.40	0.40	0.36	0.29	0.21	0.13	0.06	0.01	0.00	2.74	2.27
25	0.00	0.00	0.02	0.08	0.19	0.35	0.53	0.72	0.86	0.91	0.85	0.71	0.52	0.34	0.19	0.08	0.02	6.37	6.02
20	0.00	0.00	0.06	0.17	0.33	0.57	0.84	1.09	1.26	1.29	1.17	0.94	0.67	0.41	0.22	0.10	0.02	9.14	8.87
15	0.00	0.01	0.07	0.20	0.41	0.74	1.11	1.42	1.59	1.65	1.60	1.41	1.09	0.72	0.40	0.19	0.07	12.7	12.4
10	0.00	0.03	0.13	0.33	0.65	1.09	1.55	1.87	2.00	2.01	1.93	1.67	1.25	0.79	0.42	0.19	0.07	16.0	15.7
5	0.00	0.01	0.08	0.25	0.55	0.98	1.44	1.75	1.88	1.91	1.89	1.76	1.43	0.97	0.55	0.26	0.10	15.8	15.6
0	0.00	0.03	0.14	0.37	0.75	1.25	1.70	1.92	1.97	1.96	1.93	1.78	1.40	0.89	0.47	0.21	0.07	16.9	16.7
-5	0.00	0.00	0.05	0.19	0.45	0.84	1.29	1.63	1.80	1.84	1.80	1.64	1.31	0.89	0.50	0.23	0.08	14.6	14.3
-10	0.00	0.01	0.07	0.23	0.50	0.89	1.30	1.59	1.74	1.78	1.69	1.43	1.03	0.64	0.33	0.13	0.03	13.4	13.2
-15	0.00	0.00	0.01	0.08	0.22	0.44	0.71	0.98	1.16	1.23	1.19	1.02	0.77	0.49	0.27	0.12	0.03	8.73	8.47
-20	0.00	0.00	0.01	0.06	0.17	0.31	0.48	0.67	0.81	0.85	0.75	0.55	0.34	0.18	0.07	0.02	0.00	5.26	4.95
-25	0.00	0.00	0.00	0.01	0.04	0.11	0.20	0.31	0.39	0.43	0.41	0.35	0.25	0.15	0.07	0.03	0.00	2.74	2.29
-30	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.06	0.06	0.05	0.04	0.02	0.01	0.00	0.00	0.00	0.33	0.00
-35	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.05	0.05	0.05	0.05	0.03	0.02	0.01	0.00	0.00	0.33	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL(DEG)	10	15	20	25	30	35	40	45		
Φ t	0.00	0.08	0.65	2.00	4.40	7.84	11.7	14.7	16.3	16.7	16.0	13.9	10.5	6.71	3.61	1.59	0.50	0.05	127
Φ a	0.00	0.00	0.11	1.49	4.02	7.55	11.4	14.4	16.1	16.5	15.8	13.7	10.2	6.31	3.27	0.99	0.01	0.00	122


one-half-peak spread: U:21.0,D:21.9 , L:21.1,R:17.5 NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.9V I:0.1325A P:8.811W PF:0.5498 Freq:49.99Hz Lamp Flux:127.069x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070089
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

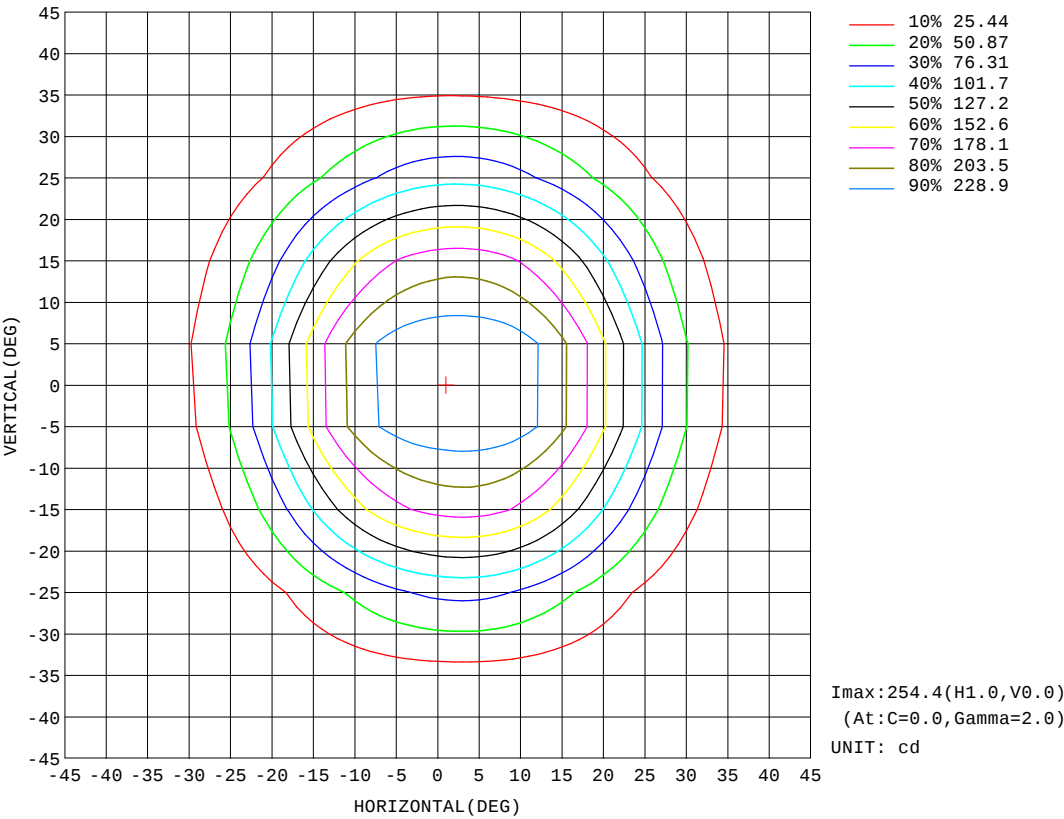


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.9V I:0.1325A P:8.811W PF:0.5498 Freq:49.99Hz Lamp Flux:127.069x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070089
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

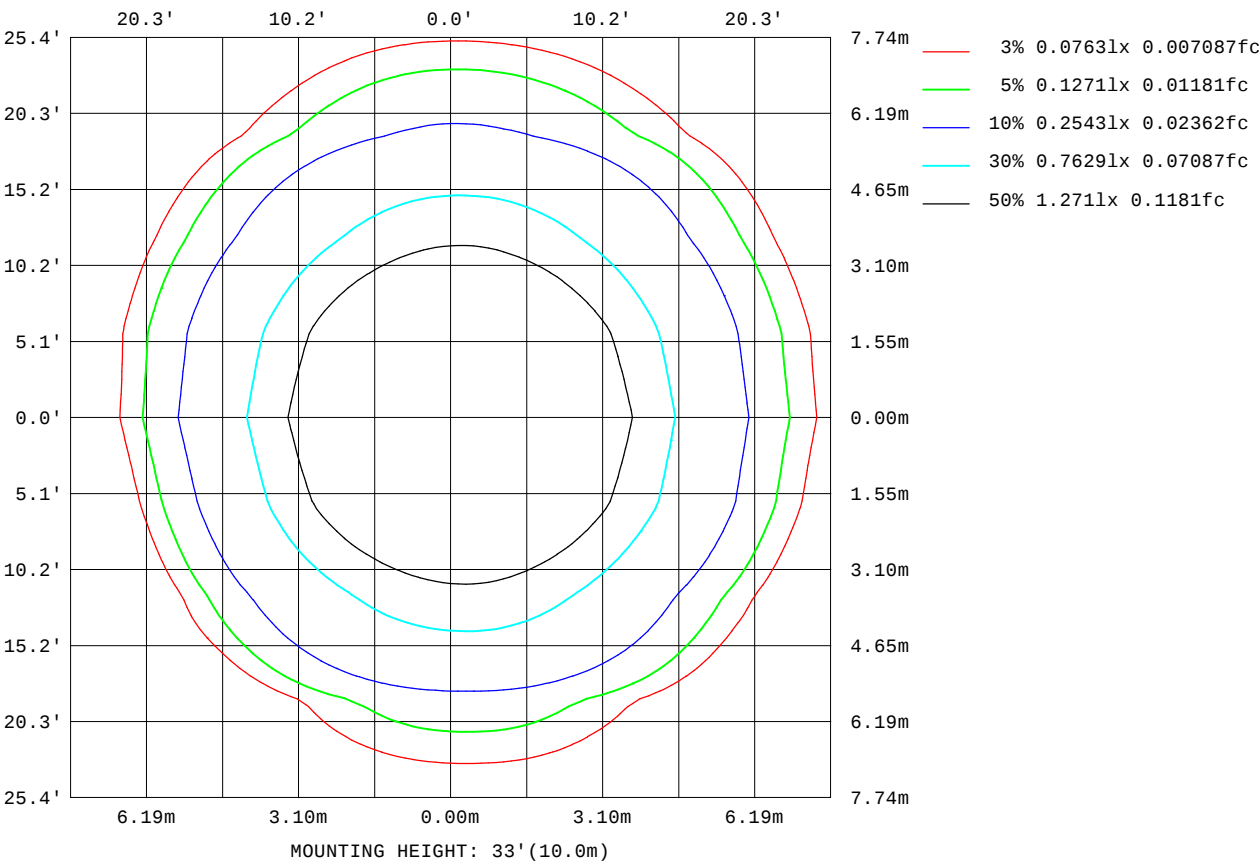

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

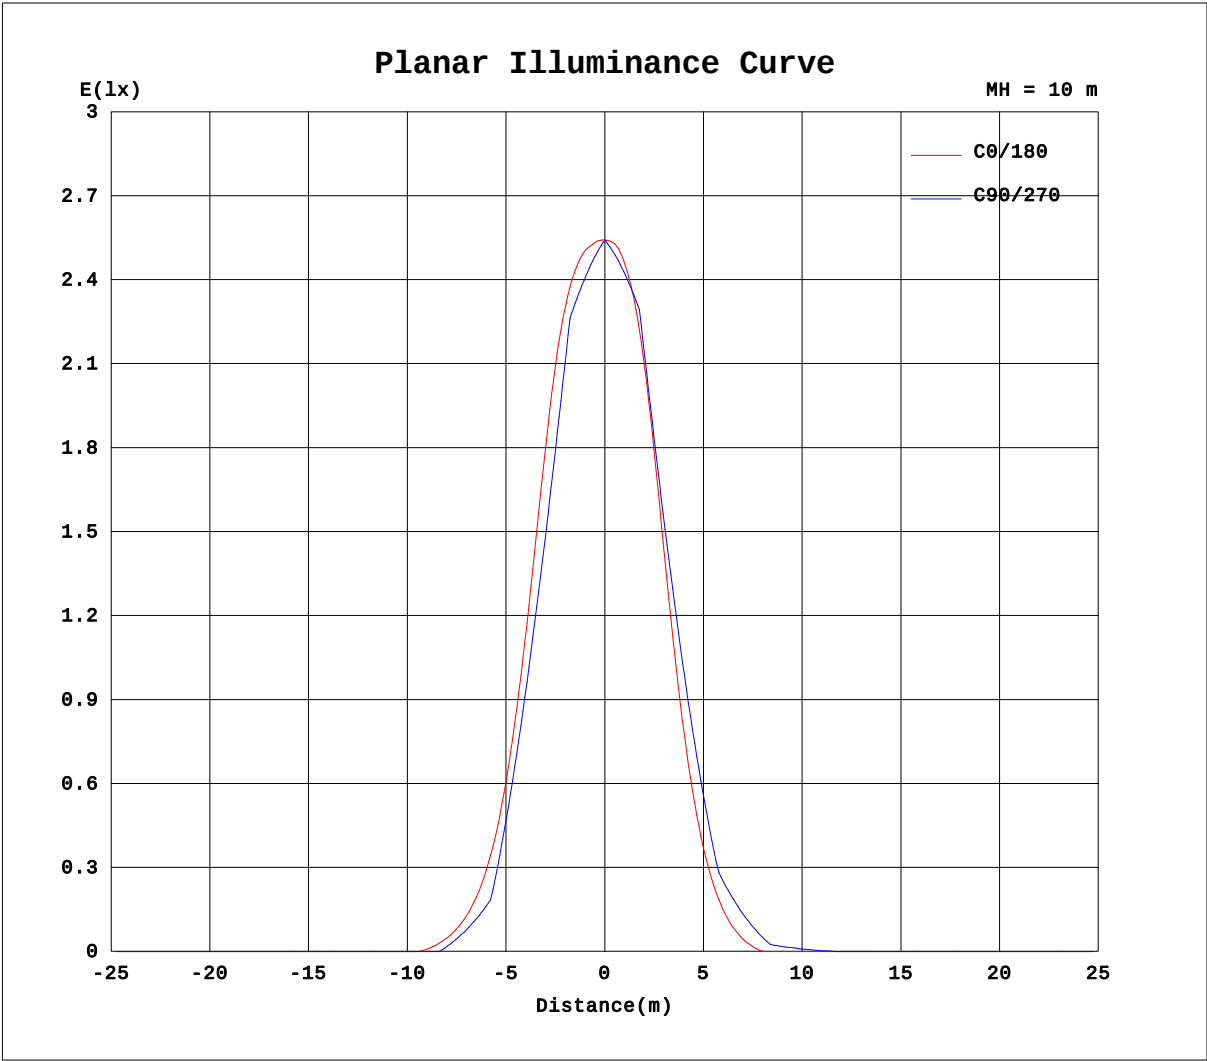


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.9V I:0.1325A P:8.811W PF:0.5498 Freq:49.99Hz Lamp Flux:127.069x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070089
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

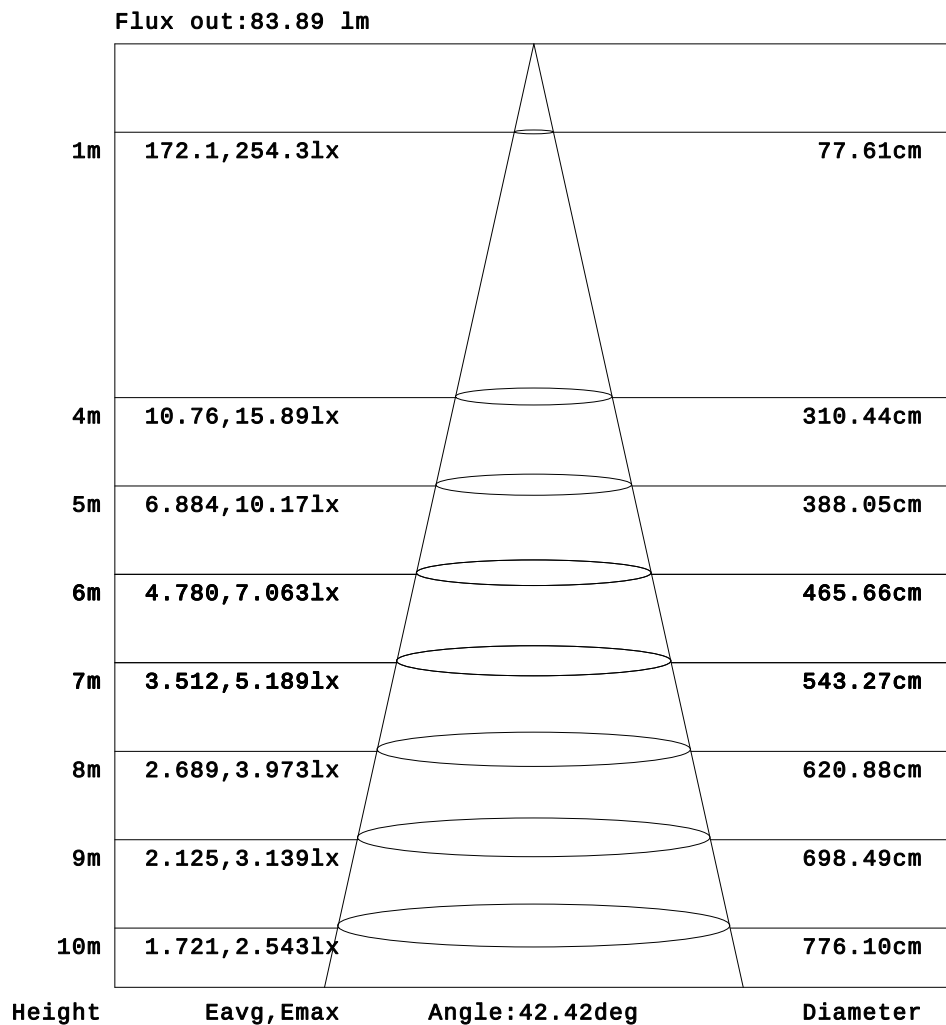

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.9V I:0.1325A P:8.811W PF:0.5498 Freq:49.99Hz Lamp Flux:127.069x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070089
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.48	5.29	9.12	12.4	14.2	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.35	12.2	19.7	25.8	28.8	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.84	8.40	20.1	37.2	55.7	72.1	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.75	20.2	42.2	69.5	99.1	123	136	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.12	9.99	30.0	62.0	103	143	172	186	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.37	20.5	50.6	97.2	153	201	227	237	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.58	21.2	52.2	101	160	211	237	245	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	9.83	31.8	70.3	127	191	235	252	254	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.46	24.2	55.6	104	163	213	239	247	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	8.60	26.8	57.5	103	157	205	232	240	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.37	16.2	37.3	69.1	110	150	178	191	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.29	12.6	28.0	50.6	79.5	109	133	144	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.37	5.07	14.8	28.9	47.3	66.9	83.9	93.3	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.40	6.45	14.0	22.9	32.4	40.3	43.7	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.55	6.19	10.7	16.7	21.9	24.5	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.90	3.32	5.02	5.65	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.19	1.43	2.38	2.80	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.9V I:0.1325A P:8.811W PF:0.5498 Freq:49.99Hz Lamp Flux:127.069x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070089
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	14.4	12.7	9.51	5.99	2.62	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	28.5	24.4	17.6	10.6	3.98	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	82.4	73.0	56.4	37.6	20.7	8.73	2.61	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	134	116	87.7	57.1	31.7	14.6	3.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	187	173	142	101	61.6	31.4	12.0	2.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	236	221	182	129	77.6	38.8	15.1	2.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	246	238	208	155	97.7	51.3	22.3	6.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	254	247	217	159	96.6	49.6	21.3	5.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	247	238	209	156	98.0	52.1	23.4	7.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	238	222	182	130	78.5	40.5	17.6	4.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	191	177	146	106	65.7	35.0	15.4	3.85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	141	122	95.0	65.2	38.9	20.0	7.64	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	92.7	82.1	65.1	45.9	28.1	14.4	4.96	0.56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	42.0	36.0	27.6	19.0	11.1	4.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	24.1	20.9	16.0	10.6	6.31	2.79	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	5.31	4.07	2.19	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	2.73	2.19	1.30	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: