

Floodlight Summary:


Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)		1743.4 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	71.5V x 70.8H
	At 50% of Imax	44.2V x 43.3H
	At 90% of Imax	23.3V x 25.0H
Beam Flux	Total	998.3 lumens per klm.
	To 10% of Imax	902.9 lumens per klm.
	To 50% of Imax	589.8 lumens per klm.
	To 90% of Imax	213.7 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H(β) Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Temperature:28.0DEG	Humidity:83%
Operators:QC1	Test Distance:8.300m [K=1.0000]
Test Date:2025-07-31	Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.8V I:0.1342A P:8.960W PF:0.5524 Freq:50.00Hz Lamp Flux:509.355x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070088
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

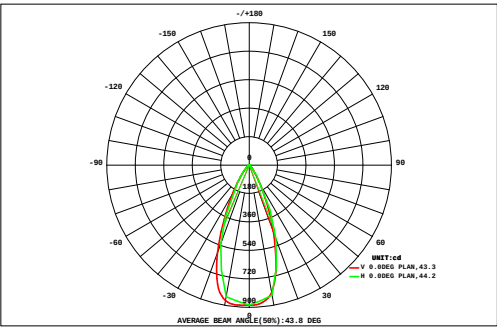

DATA OF LAMP		Eff:56.85lm/W	
MODE:SP-PZT-R135-6P-RDM-G		Imax(cd)	888.0
NOMINAL POWER(W)	9	AVAILABILITY(%)	90.7
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	462.0
NOMINAL FLUX(lm)	509.355	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	509.4
TEST VOLTAGE(V)	120	θ @50%(H,V)	43,44DEG

AREA FLUX DIAGRAM																	UNIT:lm	Φ t	Φ a
72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.05	0.00
64	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.09	0.13	0.15	0.13	0.10	0.05	0.00	0.00	0.00	0.00	0.68	0.00
56	0.00	0.00	0.00	0.00	0.03	0.12	0.23	0.34	0.40	0.41	0.38	0.31	0.22	0.12	0.04	0.00	0.00	2.60	0.00
48	0.00	0.00	0.00	0.02	0.13	0.32	0.54	0.73	0.86	0.88	0.79	0.64	0.46	0.28	0.11	0.02	0.00	5.79	0.00
40	0.00	0.00	0.00	0.08	0.30	0.60	1.01	1.47	1.86	1.90	1.63	1.21	0.80	0.47	0.23	0.05	0.00	11.6	3.90
32	0.00	0.00	0.01	0.17	0.48	1.02	1.87	3.05	4.14	4.27	3.48	2.36	1.39	0.74	0.35	0.11	0.00	23.5	19.1
24	0.00	0.00	0.04	0.25	0.72	1.73	3.69	6.75	9.63	10.0	7.96	4.93	2.43	1.09	0.47	0.15	0.01	49.9	46.8
	0.00	0.00	0.06	0.30	0.93	2.59	6.17	11.1	14.6	15.0	12.9	8.18	3.72	1.47	0.58	0.18	0.02	77.9	75.3
	0.00	0.00	0.07	0.32	1.03	3.14	7.91	14.1	17.2	17.5	15.8	10.4	4.64	1.72	0.62	0.19	0.02	94.7	92.3
	0.00	0.00	0.06	0.30	0.96	3.06	7.97	14.2	16.9	17.1	15.8	10.6	4.75	1.70	0.58	0.17	0.02	94.0	91.7
	0.00	0.00	0.04	0.24	0.70	2.21	5.96	11.3	14.9	15.6	13.4	8.42	3.78	1.39	0.47	0.14	0.01	78.5	76.0
	0.00	0.00	0.01	0.15	0.47	1.27	3.14	6.10	8.89	9.59	7.61	4.48	2.06	0.85	0.32	0.08	0.00	45.0	42.0
-24	0.00	0.00	0.00	0.05	0.24	0.62	1.39	2.56	3.68	3.96	3.18	1.97	1.03	0.47	0.16	0.02	0.00	19.3	14.8
-32	0.00	0.00	0.00	0.00	0.06	0.19	0.38	0.59	0.75	0.79	0.72	0.56	0.38	0.17	0.04	0.00	0.00	4.63	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.13	0.20	0.22	0.20	0.14	0.07	0.02	0.00	0.00	0.00	1.08	0.00
-48	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.03	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.12	0.00
-56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72		
Φ t	0.00	0.00	0.28	1.90	6.05	16.9	40.4	72.4	94.2	97.5	84.0	54.3	25.8	10.5	3.97	1.11	0.09	0.00	509
Φ a	0.00	0.00	0.00	0.00	0.45	12.5	36.8	69.5	90.8	94.0	80.8	51.1	21.6	4.61	0.00	0.00	0.00	0.00	462


one-half-peak spread: U:21.7,D:22.8 , L:19.1,R:18.4 NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.8V I:0.1342A P:8.960W PF:0.5524 Freq:50.00Hz Lamp Flux:509.355x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070088
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

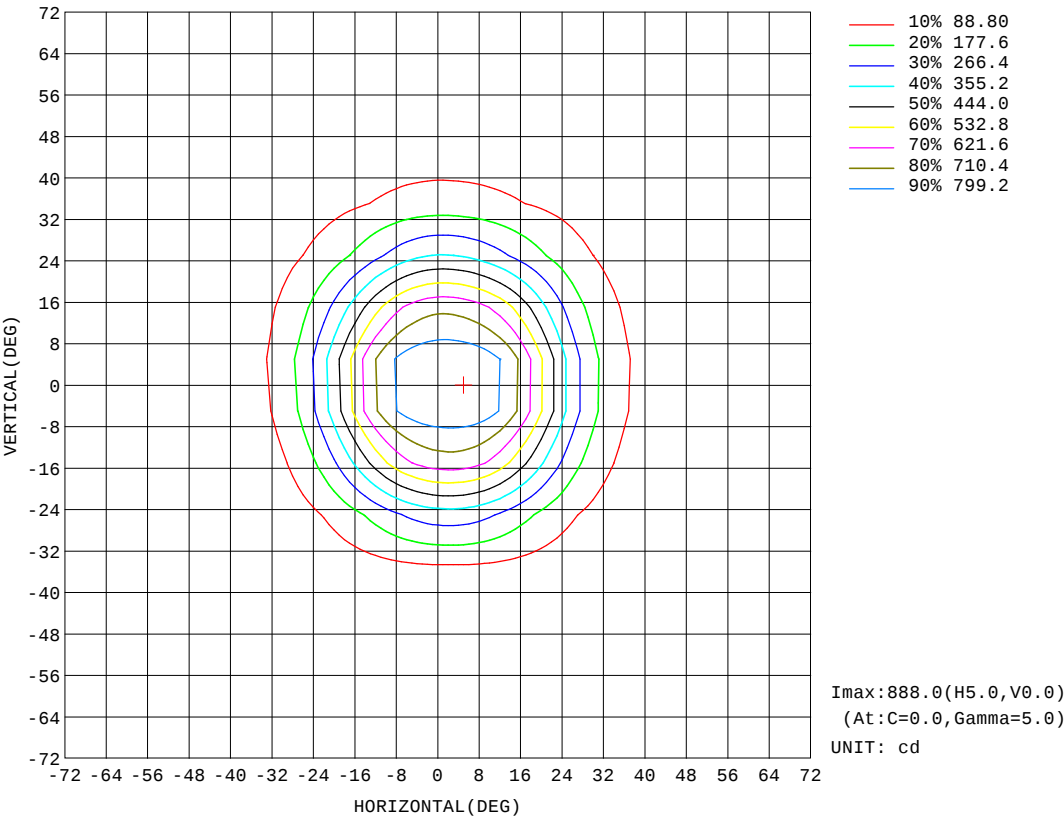


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.8V I:0.1342A P:8.960W PF:0.5524 Freq:50.00Hz Lamp Flux:509.355x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070088
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

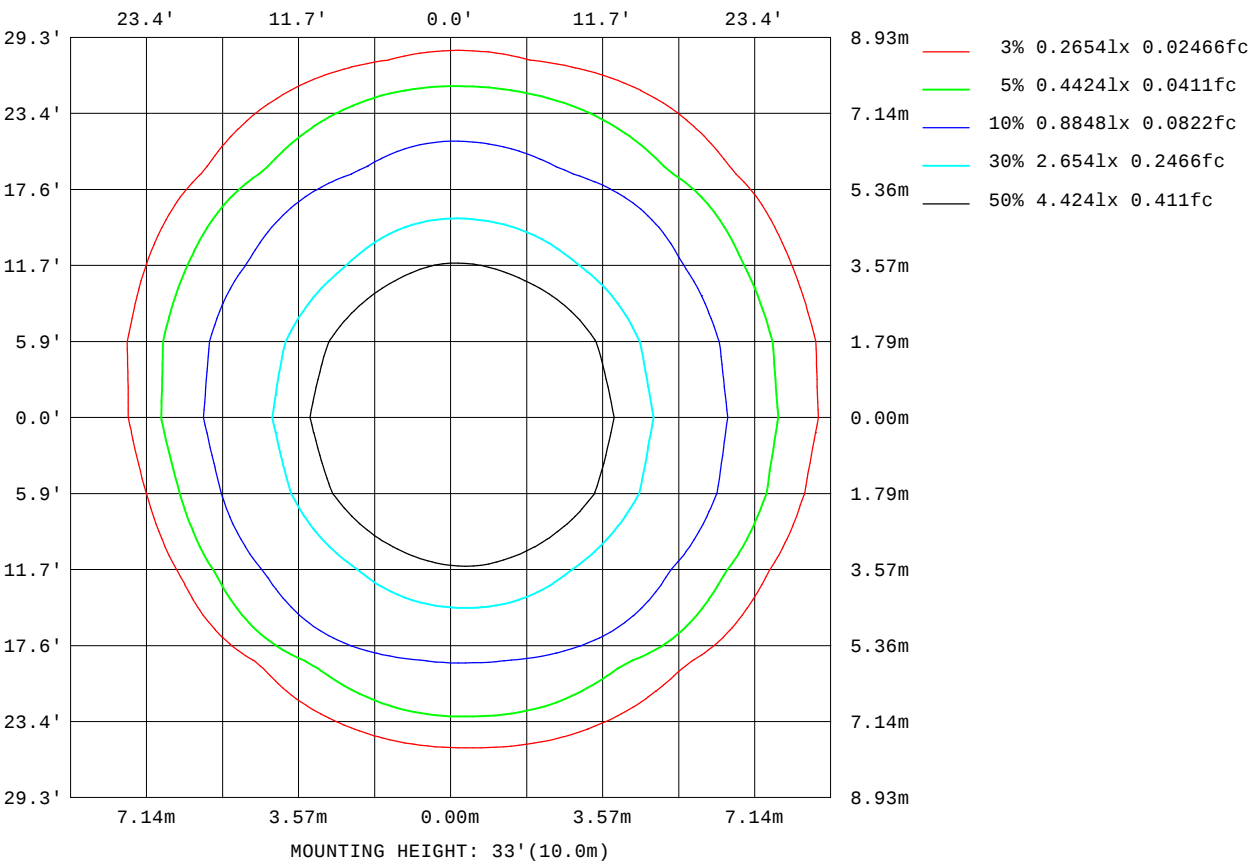

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

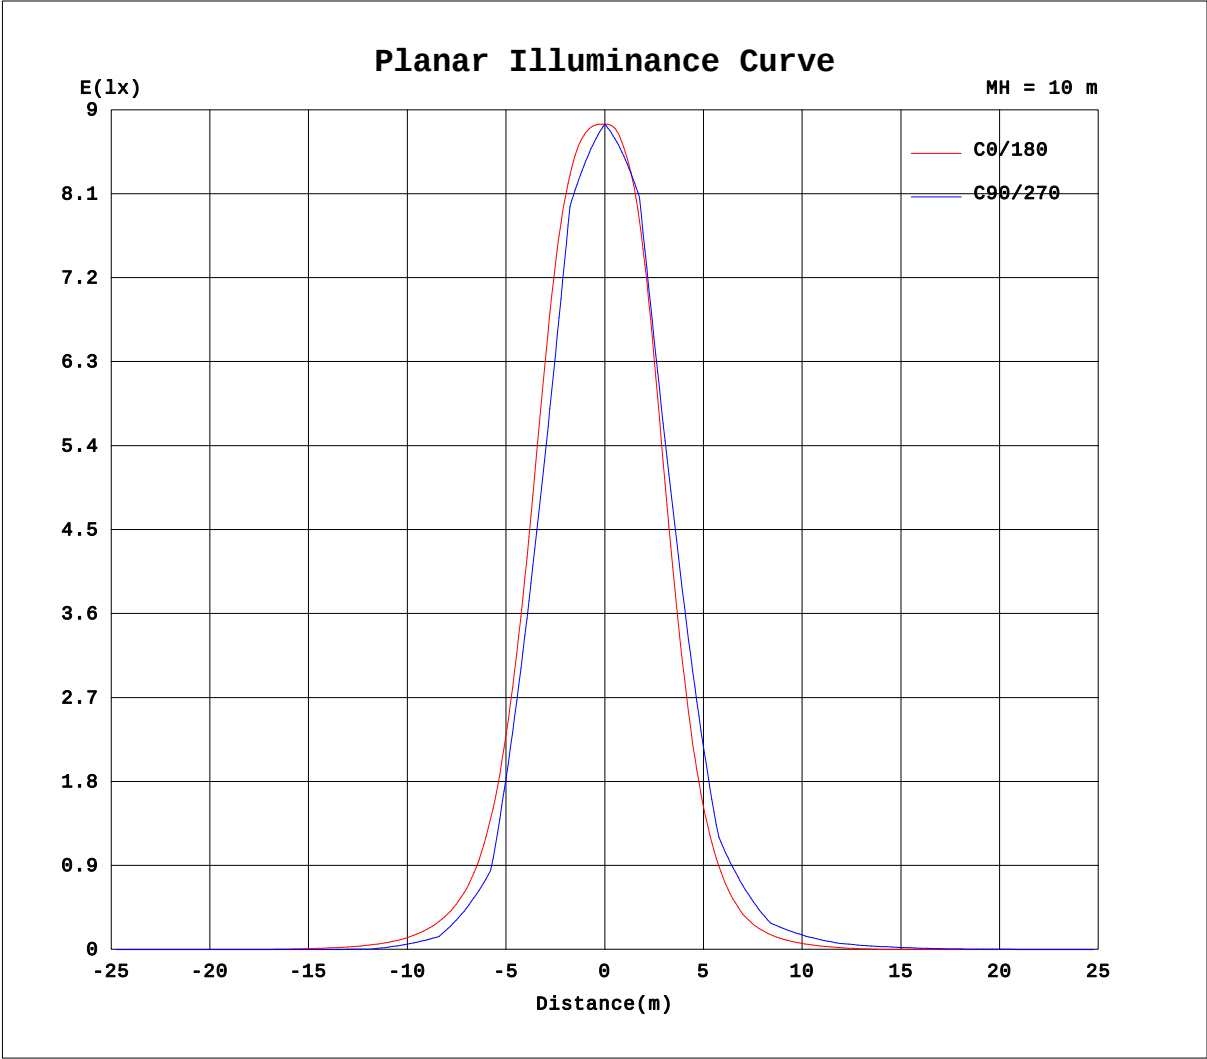


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.8V I:0.1342A P:8.960W PF:0.5524 Freq:50.00Hz Lamp Flux:509.355x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070088
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

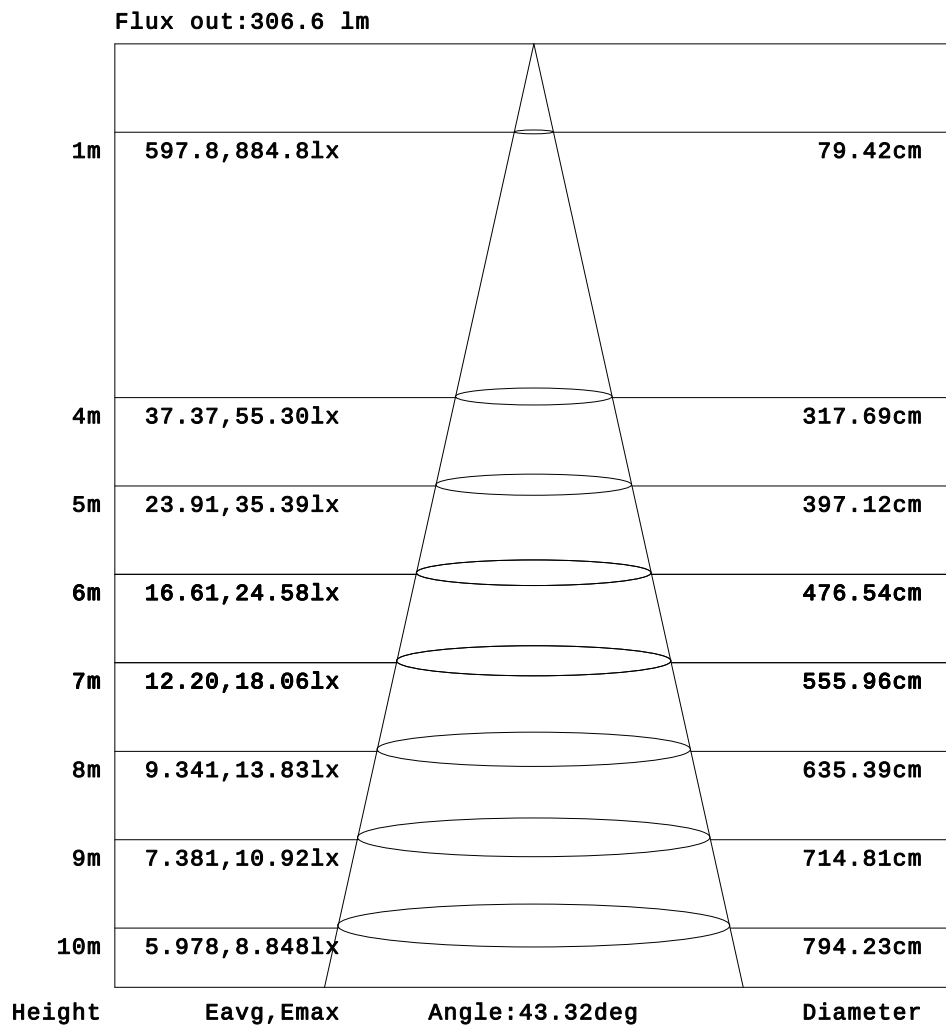

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.8V I:0.1342A P:8.960W PF:0.5524 Freq:50.00Hz Lamp Flux:509.355x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070088
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.17	0.72	1.03
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.33	1.44	2.06
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.77	3.80	6.10	8.72	12.1	15.4	16.9
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.53	7.61	12.2	17.4	23.8	29.4	31.8
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	2.57	6.19	13.0	21.9	34.1	48.7	63.1	75.2	81.2
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	5.14	12.4	22.5	36.3	56.0	80.0	102	121	131
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.47	4.29	11.7	22.4	39.5	68.5	112	169	232	284	313
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.94	8.50	18.3	32.5	56.4	101	169	259	362	448	496
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.40	11.8	23.5	42.1	78.4	149	257	393	528	622	665
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.86	15.2	28.6	51.7	100	198	346	528	694	795	834
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.24	7.10	17.1	32.4	60.5	119	228	395	592	756	835	859
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.48	8.34	19.0	36.2	69.3	138	259	444	657	818	875	885
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.29	8.14	18.7	36.2	68.2	132	242	407	603	765	842	865
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	7.95	18.5	36.2	67.2	125	224	371	548	712	809	844
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	6.81	16.7	32.7	58.3	103	177	285	419	554	648	687
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.67	14.9	29.1	49.3	81.9	130	199	290	397	487	530
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.43	11.8	23.6	39.2	63.2	96.9	143	203	272	330	358
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.18	8.75	18.1	29.2	44.5	64.2	87.7	116	146	174	186
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.59	5.38	13.4	22.1	33.4	47.6	63.7	81.9	101	118	125
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.00	8.66	15.1	22.4	31.1	39.7	48.0	55.7	61.4	63.9
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.00	4.33	9.43	15.2	21.6	28.0	34.0	39.2	43.0	44.7
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.75	7.98	12.1	16.4	20.1	22.7	24.6	25.5
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.88	3.99	6.05	8.99	11.9	14.1	15.6	16.4
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.62	3.81	5.52	6.68	7.39	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.81	1.90	2.76	3.34	3.70	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2025-07-31

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.8V I:0.1342A P:8.960W PF:0.5524 Freq:50.00Hz Lamp Flux:509.355x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070088
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																UNIT: cd			
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	1.17	1.06	0.65	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	2.34	2.12	1.29	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	17.3	16.3	14.0	10.8	7.80	4.96	2.58	0.60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	32.3	30.4	26.7	21.4	15.6	9.92	5.17	1.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-35	81.0	75.0	63.4	50.1	37.0	25.4	15.7	8.09	3.59	0.56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-30	130	120	100	78.7	58.4	40.8	26.2	15.0	7.18	1.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-25	311	278	222	160	107	68.4	42.2	24.7	13.2	5.29	0.98	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-20	493	436	343	242	156	96.0	58.2	34.4	19.3	9.47	1.95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-15	663	611	502	365	235	139	79.5	44.8	24.7	12.6	4.36	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-10	833	785	662	488	313	182	101	55.1	30.1	15.8	6.76	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-5	860	827	720	537	345	199	110	61.2	33.4	17.3	7.69	0.54	0.00	0.00	0.00	0.00	0.00	0.00	
0	888	869	778	586	378	216	119	67.3	36.8	18.8	8.61	1.08	0.00	0.00	0.00	0.00	0.00	0.00	
5	862	829	726	540	346	201	113	65.5	37.0	19.3	8.70	1.14	0.00	0.00	0.00	0.00	0.00	0.00	
10	835	788	674	494	315	186	107	63.6	37.2	19.7	8.79	1.19	0.00	0.00	0.00	0.00	0.00	0.00	
15	674	620	519	381	248	150	90.4	55.5	33.4	18.0	7.78	0.60	0.00	0.00	0.00	0.00	0.00	0.00	
20	514	452	363	268	181	115	73.5	47.5	29.5	16.3	6.77	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
25	347	307	250	188	132	88.8	59.2	39.4	24.9	13.8	5.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
30	180	162	137	109	84.0	62.3	44.9	31.4	20.4	11.2	3.53	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
35	122	111	95.1	78.0	61.6	47.1	34.7	24.5	15.7	8.04	1.77	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
40	63.0	59.2	53.6	46.7	39.2	31.9	24.6	17.6	11.0	4.86	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
45	44.2	41.9	38.3	33.7	28.5	23.2	17.6	12.2	6.77	2.43	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
50	25.5	24.6	23.0	20.7	17.8	14.5	10.7	6.75	2.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	16.5	15.9	14.7	13.0	10.8	8.22	5.37	3.38	1.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	7.59	7.24	6.45	5.32	3.86	1.93	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	3.79	3.62	3.22	2.66	1.93	0.96	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: