

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	1892.5 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	69.0V x 68.3H
	At 50% of Imax	43.0V x 42.3H
	At 90% of Imax	22.7V x 23.7H

Beam Flux	Total	997.2 lumens per klm.
	To 10% of Imax	921.0 lumens per klm.
	To 50% of Imax	602.5 lumens per klm.
	To 90% of Imax	204.5 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.7 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.9V I:0.1100A P:7.205W PF:0.5418 Freq:50.00Hz Lamp Flux:281.51x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070087
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

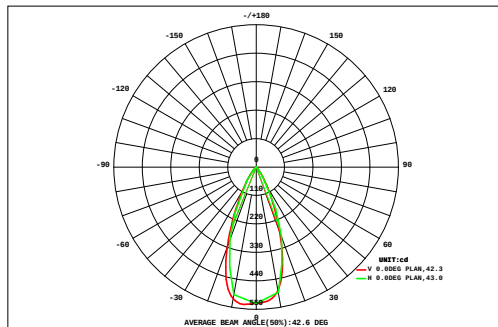

DATA OF LAMP		Eff:39.07lm/W	
MODE:SP-PZT-R135-6P-RDM-R		Imax(cd)	532.8
NOMINAL POWER(W)	7	AVAILABILITY(%)	93.0
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	261.9
NOMINAL FLUX(lm)	281.51	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	281.5
TEST VOLTAGE(V)	120	θ @50%(H,V)	42,43DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
	0.00	0.00	0.01	0.03	0.06	0.09	0.12	0.15	0.17	0.17	0.16	0.15	0.12	0.09	0.06	0.04	0.02	0.00	1.45	0.00		
	40	0.00	0.00	0.02	0.06	0.11	0.16	0.20	0.24	0.25	0.25	0.24	0.21	0.17	0.13	0.09	0.05	0.02	0.00	2.21	0.00	
	35	0.00	0.02	0.06	0.11	0.19	0.29	0.40	0.52	0.60	0.61	0.57	0.49	0.39	0.29	0.20	0.13	0.07	0.03	4.99	3.22	
	30	0.00	0.04	0.11	0.19	0.30	0.45	0.62	0.78	0.87	0.87	0.79	0.66	0.51	0.37	0.25	0.15	0.09	0.04	7.10	5.72	
	25	0.01	0.06	0.14	0.28	0.48	0.77	1.15	1.54	1.82	1.88	1.75	1.48	1.12	0.76	0.47	0.27	0.15	0.07	14.2	13.2	
	20	0.04	0.11	0.23	0.44	0.75	1.20	1.75	2.28	2.61	2.61	2.37	1.93	1.41	0.91	0.54	0.30	0.16	0.08	19.7	18.8	
	15	0.02	0.10	0.24	0.49	0.93	1.56	2.28	2.93	3.32	3.43	3.31	2.95	2.28	1.50	0.88	0.47	0.25	0.12	27.1	26.3	
	10	0.05	0.16	0.36	0.75	1.39	2.27	3.18	3.86	4.16	4.19	4.02	3.51	2.61	1.63	0.90	0.47	0.24	0.11	33.9	33.2	
	5	0.03	0.11	0.27	0.61	1.19	2.04	2.96	3.61	3.89	3.97	3.95	3.67	2.98	2.01	1.16	0.60	0.30	0.14	33.5	32.8	
	0	0.05	0.16	0.39	0.84	1.59	2.59	3.51	3.95	4.05	4.09	4.06	3.70	2.87	1.85	1.02	0.51	0.24	0.10	35.6	34.9	
	-5	0.02	0.08	0.21	0.48	1.00	1.78	2.66	3.37	3.71	3.81	3.73	3.40	2.73	1.85	1.08	0.56	0.27	0.12	30.9	30.2	
	-10	0.03	0.10	0.24	0.55	1.12	1.88	2.66	3.29	3.61	3.67	3.47	2.95	2.15	1.36	0.76	0.39	0.18	0.07	28.5	27.7	
	-15	0.00	0.04	0.12	0.27	0.55	0.99	1.52	2.05	2.43	2.58	2.47	2.13	1.63	1.09	0.65	0.35	0.17	0.07	19.1	18.3	
	-20	0.00	0.04	0.12	0.24	0.44	0.73	1.07	1.43	1.73	1.80	1.58	1.18	0.78	0.48	0.28	0.16	0.07	0.02	12.1	11.1	
	-25	0.00	0.01	0.03	0.09	0.19	0.34	0.53	0.73	0.89	0.97	0.95	0.81	0.62	0.42	0.26	0.14	0.06	0.02	7.07	5.91	
	-30	0.00	0.00	0.00	0.03	0.07	0.11	0.15	0.18	0.20	0.20	0.18	0.15	0.12	0.09	0.06	0.03	0.01	0.00	1.58	0.37	
	-35	0.00	0.00	0.00	0.01	0.03	0.05	0.10	0.15	0.19	0.21	0.21	0.18	0.14	0.09	0.05	0.03	0.01	0.00	1.47	0.00	
	-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.10	0.00	
	-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL(DEG)				10	15	20	25	30	35	40	45	
Φ t	0.27	1.04	2.55	5.47	10.4	17.3	24.9	31.1	34.5	35.3	33.8	29.6	22.6	14.9	8.71	4.65	2.31	1.00	280	---		
Φ a	0.00	0.00	0.57	4.12	9.32	16.4	24.0	30.4	33.8	34.6	33.1	28.9	21.9	13.9	7.52	3.21	0.25	0.00	---	262		

one-half-peak spread: U:21.3,D:21.9 , L:26.1,R:16.4


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.9V I:0.1100A P:7.205W PF:0.5418 Freq:50.00Hz Lamp Flux:281.51x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070087
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

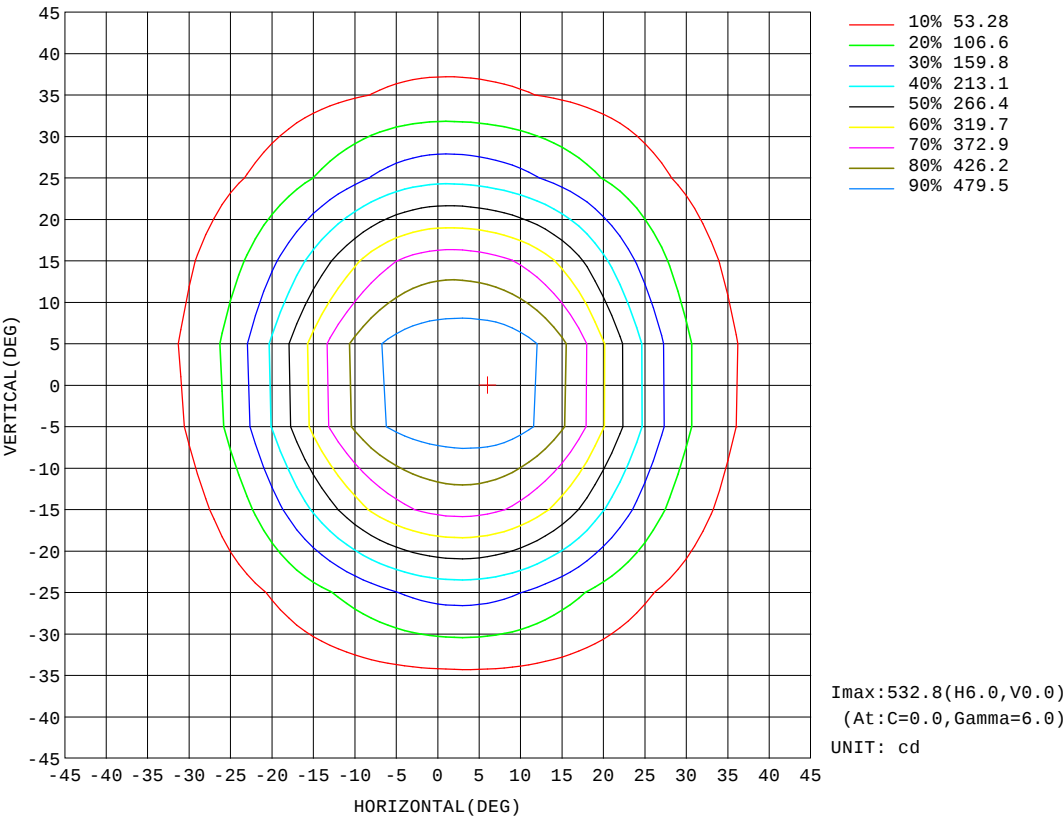


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.9V I:0.1100A P:7.205W PF:0.5418 Freq:50.00Hz Lamp Flux:281.51x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070087
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

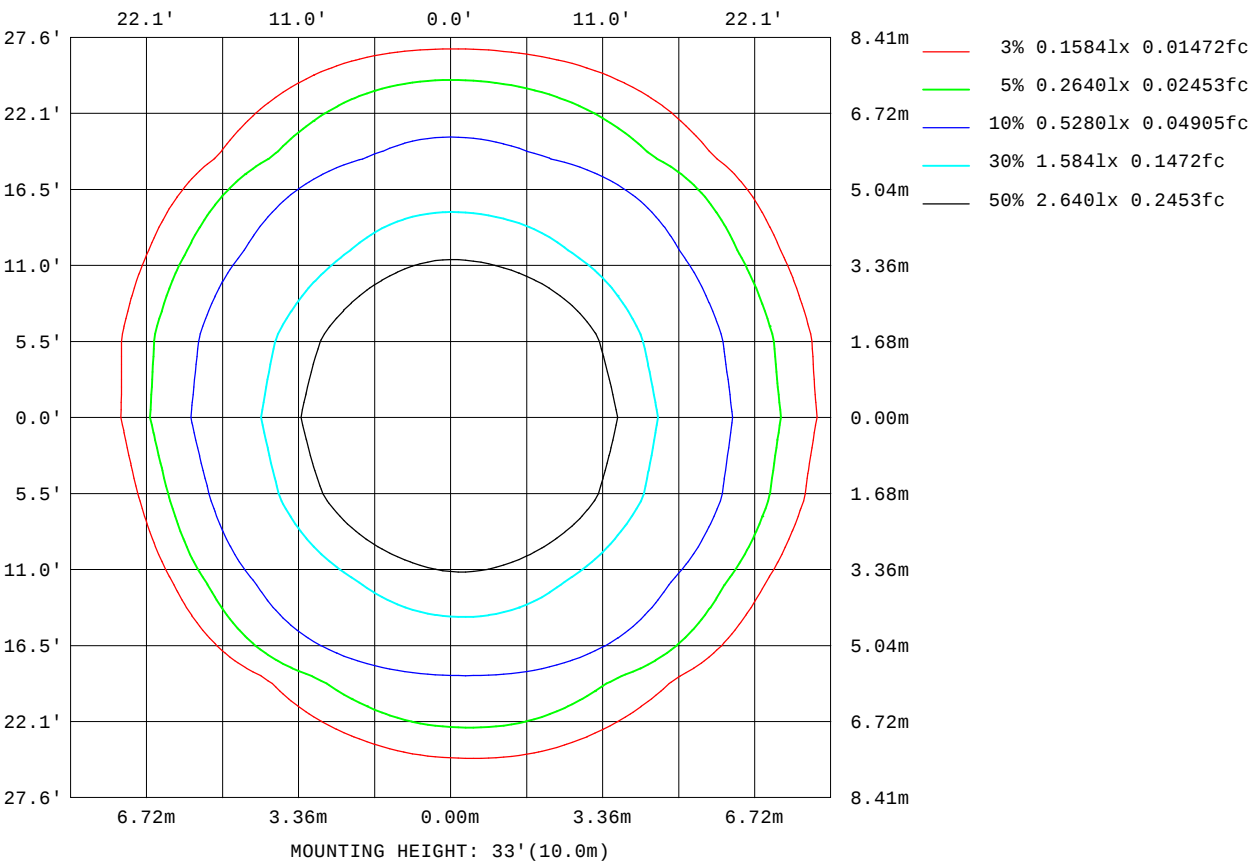

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

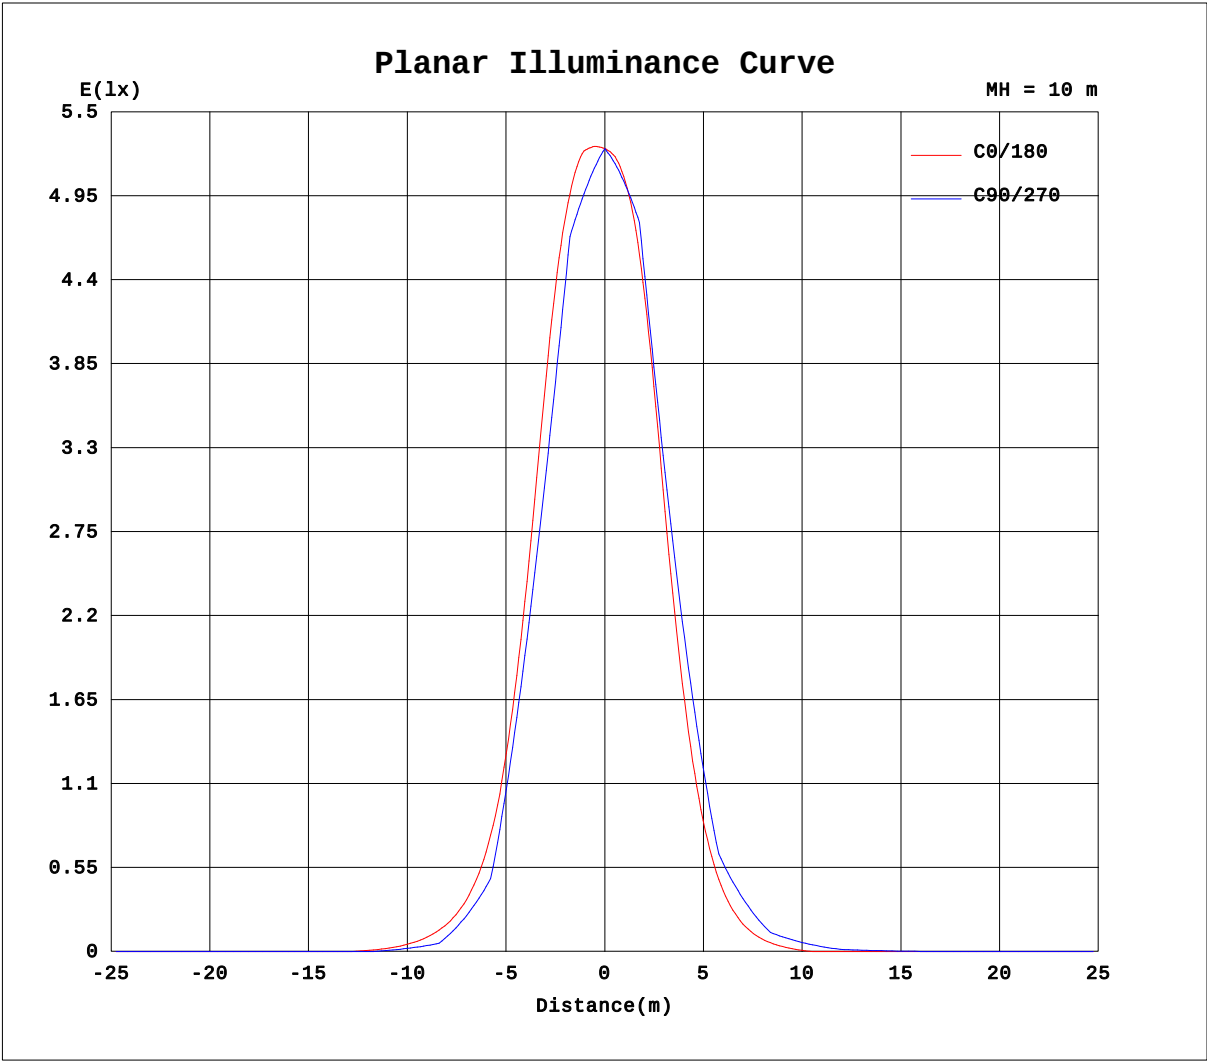


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.9V I:0.1100A P:7.205W PF:0.5418 Freq:50.00Hz Lamp Flux:281.51x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070087
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

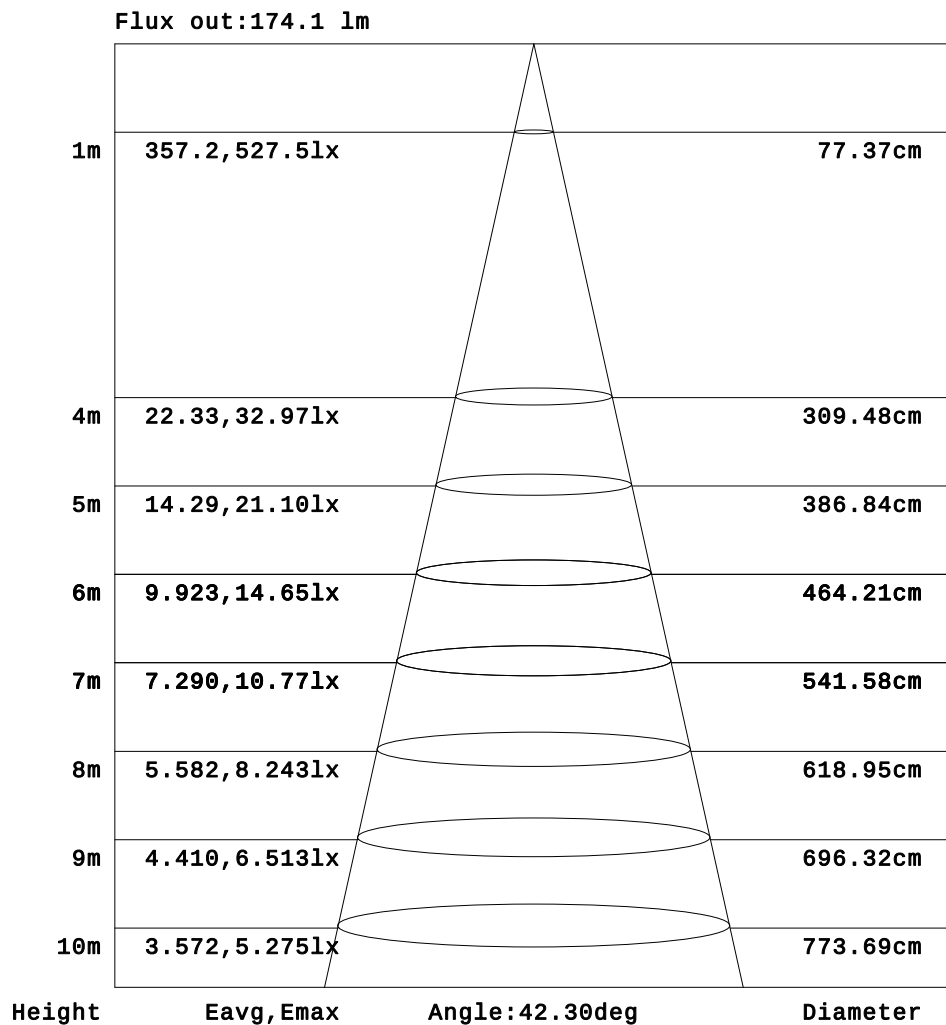

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.9V I:0.1100A P:7.205W PF:0.5418 Freq:50.00Hz Lamp Flux:281.51x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070087
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.27	3.07	4.94	6.05	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	3.21	6.92	10.5	12.3	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.44	6.69	12.3	20.6	29.6	37.8	42.8	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	6.44	15.4	27.2	41.6	55.8	67.7	74.1	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.06	5.55	15.1	31.9	57.5	90.7	126	159	179	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.64	13.4	29.4	56.9	100	154	210	260	287	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.13	5.09	16.4	36.7	75.6	140	219	298	357	387	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.22	10.2	25.6	56.0	115	210	316	413	470	491	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.02	9.94	26.1	58.1	119	215	332	434	488	507	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.41	14.6	36.1	79.2	155	266	393	484	519	527	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.51	11.6	29.7	64.1	126	220	336	437	494	512	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.81	14.2	33.9	69.1	128	219	324	421	481	501	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.61	9.43	23.9	48.3	88.9	151	230	311	372	398	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.61	9.48	21.8	41.1	70.2	112	168	229	279	298	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.39	13.2	26.2	45.3	71.7	107	146	181	198	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.51	9.11	17.9	29.5	43.8	60.7	78.9	93.5	98.6	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.65	3.87	9.87	17.8	27.2	37.9	49.3	58.9	63.3	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.56	4.70	9.71	14.8	19.7	24.1	27.1	28.1	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	1.89	4.34	7.22	10.7	13.8	16.0	17.0	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.09	3.01	4.49	5.51	5.92	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.32	1.33	2.12	2.68	2.95	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.9V I:0.1100A P:7.205W PF:0.5418 Freq:50.00Hz Lamp Flux:281.51x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070087
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	6.34	5.85	4.69	3.00	1.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	12.7	11.3	8.78	5.25	1.43	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	43.6	40.0	32.5	24.1	15.9	9.11	4.43	0.90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	73.9	66.0	52.9	39.5	27.2	16.1	7.26	0.69	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	180	161	127	91.0	59.4	35.6	19.2	8.07	2.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	281	243	187	129	80.8	47.5	25.9	12.0	3.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	388	358	298	215	138	79.3	42.4	20.7	7.99	1.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	488	454	378	269	167	93.1	48.4	23.3	9.20	0.80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	511	493	432	322	206	115	60.9	30.4	13.3	3.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	533	516	449	327	202	111	58.2	29.2	12.5	2.52	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	515	497	436	323	204	115	62.0	32.2	14.8	4.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	496	463	384	269	165	93.4	51.1	26.8	12.2	2.62	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	394	366	307	222	142	83.2	46.9	25.5	12.1	3.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	286	251	199	142	91.6	55.4	32.4	17.8	7.83	0.56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	193	173	141	105	71.1	45.1	27.2	15.3	6.69	0.89	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	94.5	83.8	69.1	53.4	38.7	26.4	16.5	8.81	2.72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	61.8	56.1	47.4	37.6	27.9	19.3	12.0	6.00	1.92	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	27.4	25.2	21.9	17.9	13.5	9.13	4.92	1.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	16.8	15.6	13.6	11.0	7.99	5.00	2.87	0.90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	5.82	5.29	4.32	2.91	1.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	2.94	2.72	2.28	1.61	0.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: