

Floodlight Summary:


Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)		1742.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	72.7V x 70.9H
	At 50% of Imax	43.9V x 43.2H
	At 90% of Imax	22.7V x 24.6H
Beam Flux	Total	998.7 lumens per klm.
	To 10% of Imax	900.1 lumens per klm.
	To 50% of Imax	583.3 lumens per klm.
	To 90% of Imax	203.9 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H(β) Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Temperature:28.0DEG	Humidity:83%
Operators:QC1	Test Distance:8.300m [K=1.0000]
Test Date:2025-07-31	Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.7V I:0.1344A P:8.934W PF:0.5504 Freq:50.00Hz Lamp Flux:488.075x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070090
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

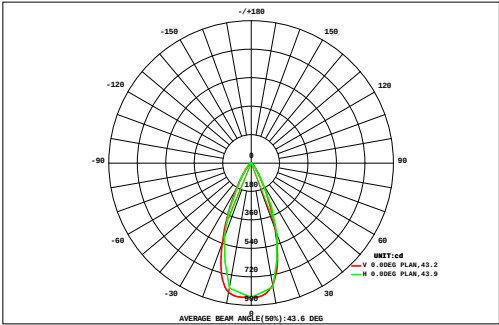

DATA OF LAMP		Eff:54.63lm/W	
MODE:SP-PZT-R135-6P-RDM-W		Imax(cd)	850.4
NOMINAL POWER(W)	9	AVAILABILITY(%)	90.3
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	440.6
NOMINAL FLUX(lm)	488.075	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	488.1
TEST VOLTAGE(V)	120	θ @50%(H,V)	43,44DEG

AREA FLUX DIAGRAM																	UNIT:lm	Φ t	Φ a
72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.04	0.00
64	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.09	0.13	0.14	0.12	0.09	0.04	0.00	0.00	0.00	0.00	0.63	0.00
56	0.00	0.00	0.00	0.00	0.04	0.12	0.23	0.33	0.39	0.40	0.37	0.30	0.21	0.11	0.03	0.00	0.00	2.51	0.00
48	0.00	0.00	0.00	0.02	0.13	0.31	0.52	0.71	0.83	0.85	0.77	0.62	0.44	0.27	0.11	0.02	0.00	5.60	0.00
40	0.00	0.00	0.00	0.09	0.31	0.59	0.98	1.42	1.77	1.81	1.56	1.16	0.77	0.45	0.22	0.05	0.00	11.2	3.73
32	0.00	0.00	0.02	0.19	0.50	1.00	1.83	2.97	3.95	4.04	3.31	2.23	1.30	0.69	0.33	0.11	0.00	22.5	18.4
24	0.00	0.00	0.04	0.27	0.73	1.68	3.60	6.55	9.07	9.47	7.59	4.64	2.25	1.02	0.45	0.15	0.01	47.5	44.5
	0.00	0.00	0.06	0.31	0.91	2.43	5.78	10.5	13.8	14.3	12.4	7.80	3.54	1.41	0.56	0.19	0.02	74.0	71.4
	0.00	0.00	0.07	0.34	1.01	2.93	7.38	13.2	16.4	16.8	15.1	9.97	4.47	1.66	0.61	0.20	0.03	90.2	87.8
	0.00	0.00	0.07	0.35	1.03	3.07	7.86	13.6	16.1	16.4	15.0	9.83	4.34	1.55	0.55	0.17	0.02	89.9	87.5
	0.00	0.00	0.04	0.27	0.79	2.23	5.84	10.9	14.2	14.8	12.6	7.82	3.45	1.28	0.47	0.14	0.01	74.8	72.3
	0.00	0.00	0.01	0.16	0.52	1.28	2.97	5.67	8.40	9.16	7.28	4.34	2.06	0.88	0.34	0.09	0.00	43.2	40.2
-24	0.00	0.00	0.00	0.05	0.26	0.66	1.36	2.42	3.55	3.95	3.20	2.00	1.07	0.51	0.19	0.03	0.00	19.3	14.8
-32	0.00	0.00	0.00	0.01	0.08	0.24	0.44	0.67	0.84	0.90	0.80	0.62	0.41	0.20	0.05	0.00	0.00	5.27	0.00
-40	0.00	0.00	0.00	0.00	0.04	0.11	0.18	0.26	0.28	0.25	0.17	0.09	0.03	0.00	0.00	0.00	0.00	1.41	0.00
-48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.04	0.04	0.02	0.01	0.01	0.00	0.00	0.00	0.17	0.00
-56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72		
Φ t	0.00	0.00	0.31	2.06	6.29	16.6	38.9	69.2	89.8	93.3	80.3	51.6	24.4	10.1	3.91	1.15	0.10	0.00	488
Φ a	0.00	0.00	0.00	0.00	0.63	12.2	35.6	66.1	86.2	89.6	77.1	48.6	20.3	4.20	0.00	0.00	0.00	0.00	441


one-half-peak spread: U:21.7,D:22.5 , L:25.6,R:17.9 NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.7V I:0.1344A P:8.934W PF:0.5504 Freq:50.00Hz Lamp Flux:488.075x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070090
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

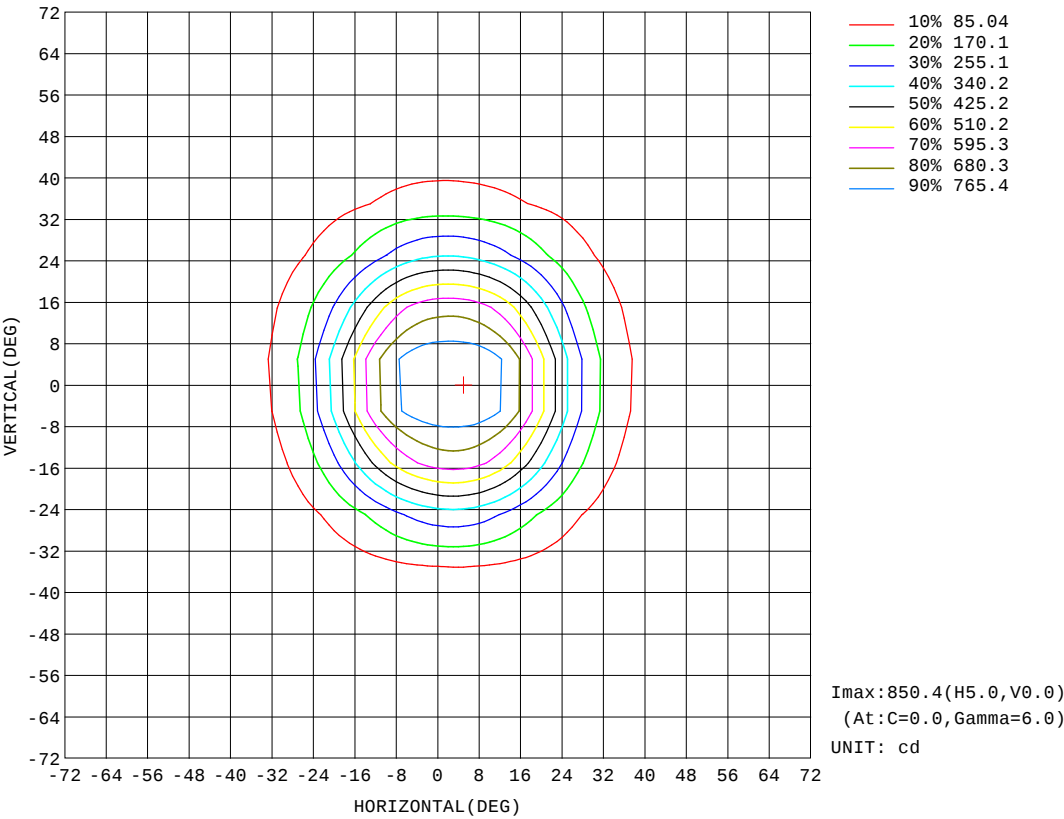


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.7V I:0.1344A P:8.934W PF:0.5504 Freq:50.00Hz Lamp Flux:488.075x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070090
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

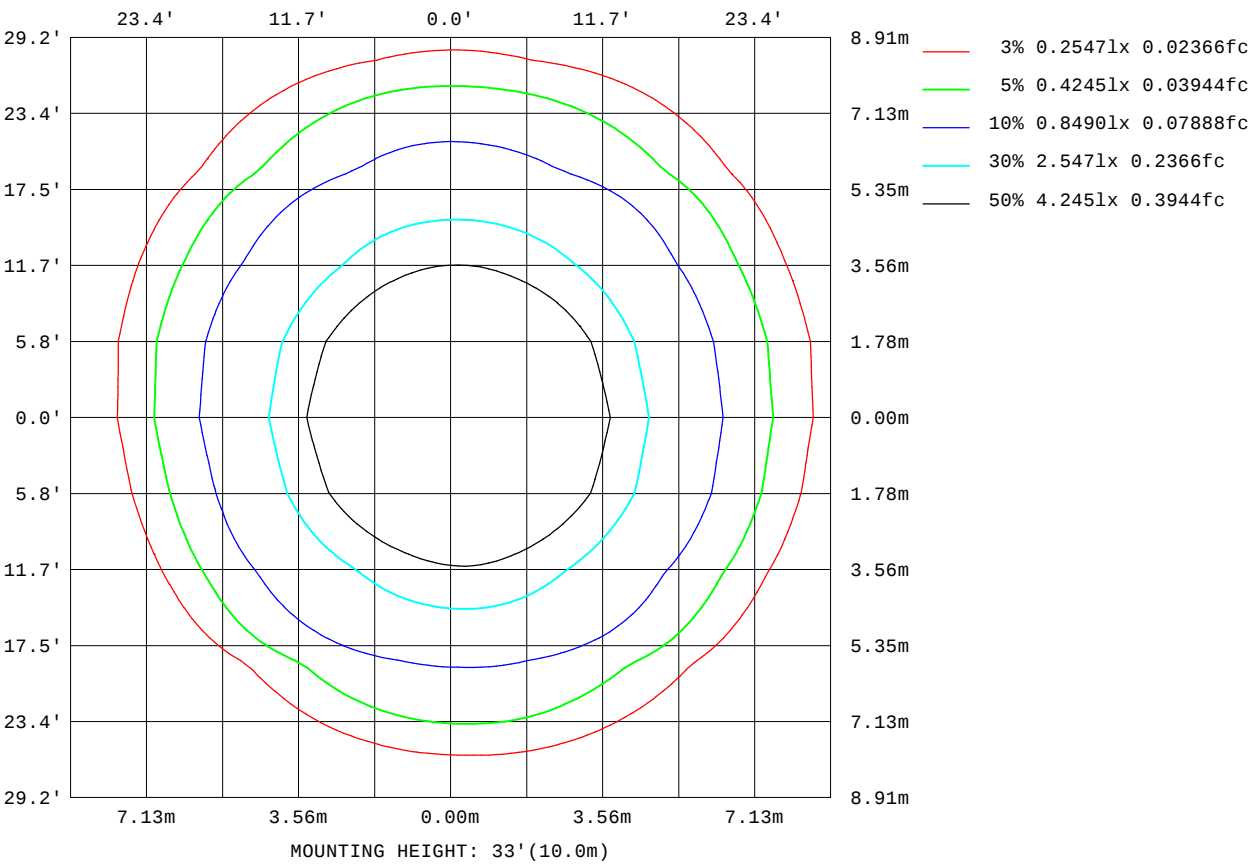

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

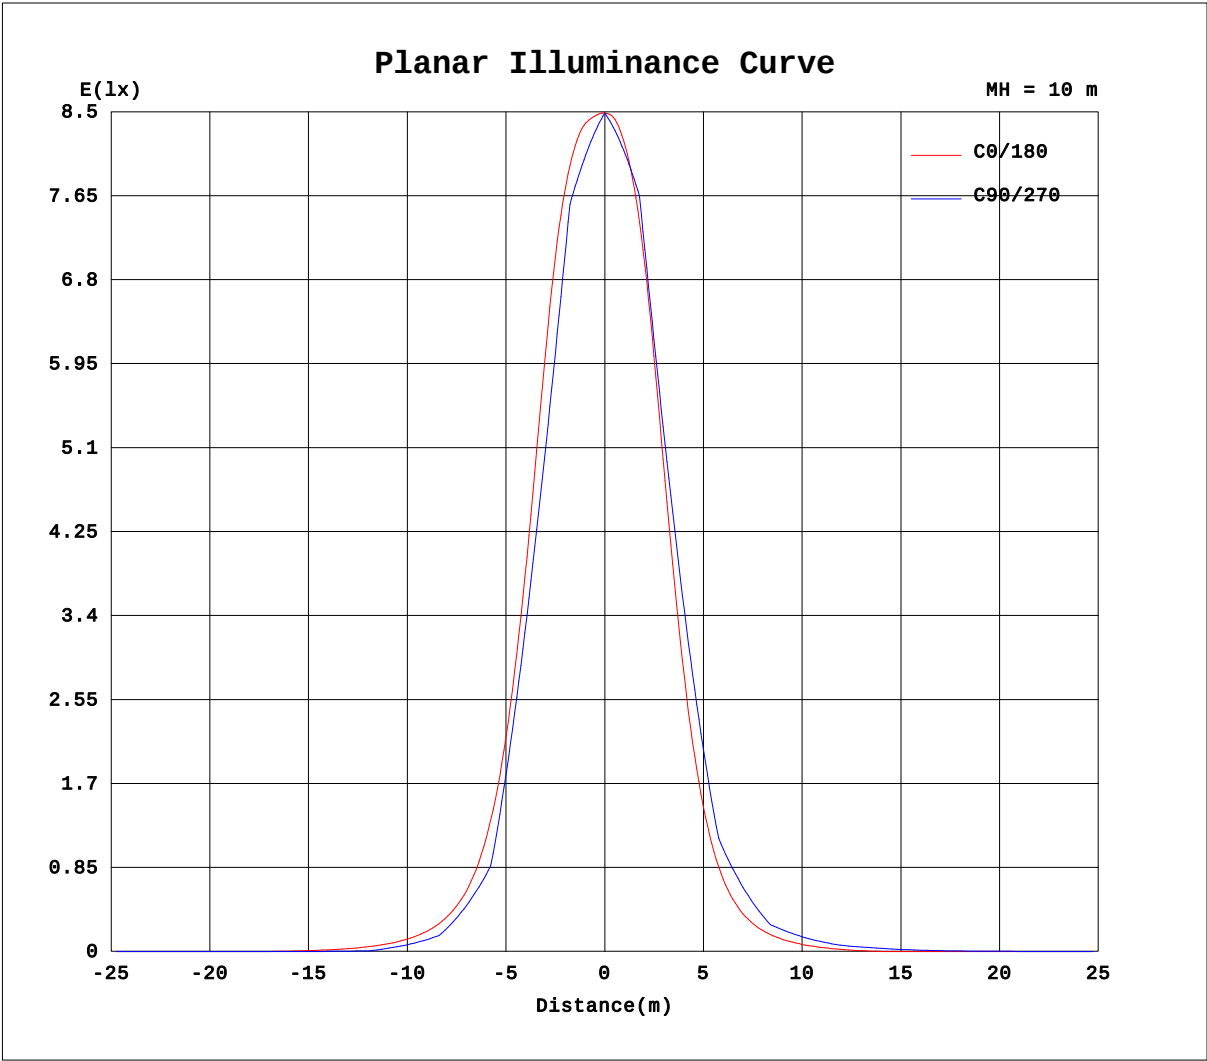


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.7V I:0.1344A P:8.934W PF:0.5504 Freq:50.00Hz Lamp Flux:488.075x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070090
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

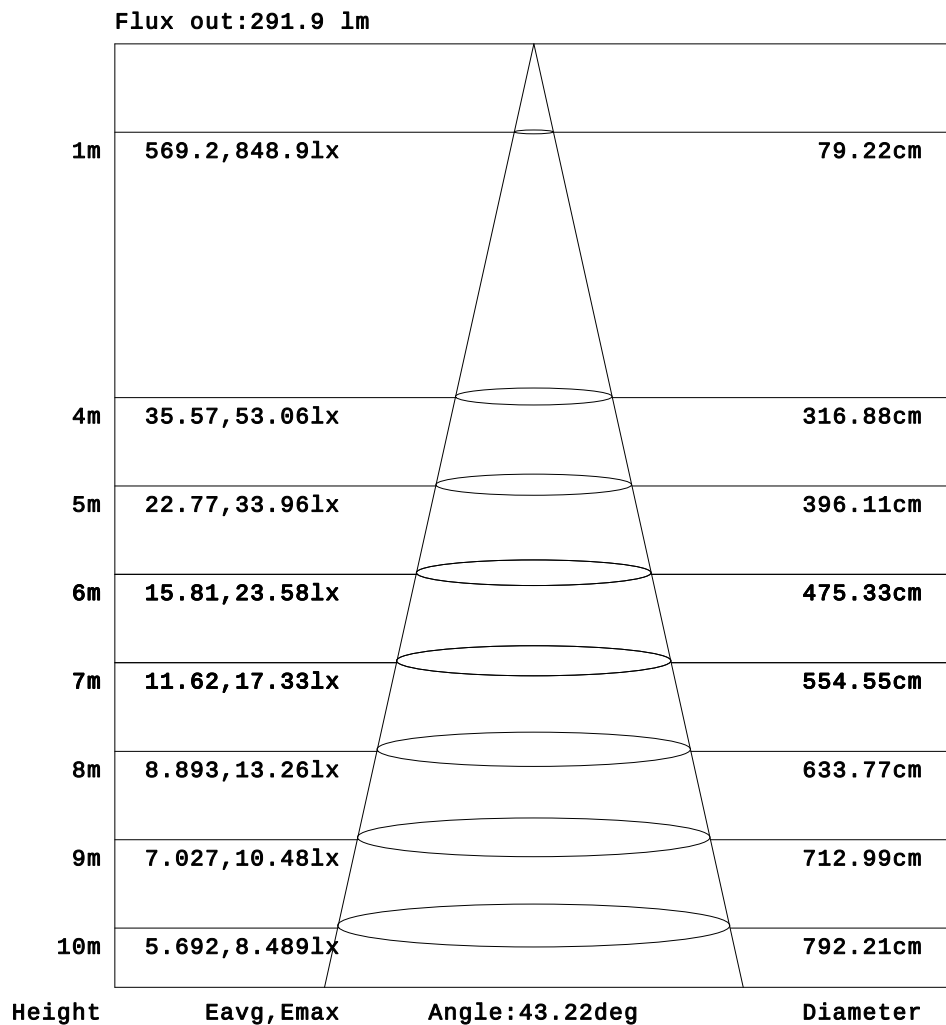

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.7V I:0.1344A P:8.934W PF:0.5504 Freq:50.00Hz Lamp Flux:488.075x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070090
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd		
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.71	1.35
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	1.72	2.90	3.43
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.17	2.34	4.80	7.43	10.2	14.1	17.7	19.8
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.10	5.63	10.6	16.0	21.6	27.9	33.7	36.6
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	2.81	7.00	14.5	23.8	35.1	49.0	64.1	77.1	84.6
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.84	6.97	15.6	26.9	41.1	59.3	82.4	106	125	134
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.22	4.34	12.5	24.2	41.3	67.7	107	158	215	269	302
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.64	10.5	22.1	38.6	64.5	108	174	256	349	430	476
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.90	12.1	24.8	43.8	76.6	138	237	364	489	581	630
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	7.17	18.3	33.8	59.3	108	202	348	524	675	759	794
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	6.76	17.7	33.4	59.4	109	206	360	546	706	789	819
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.18	10.1	22.5	41.1	74.5	141	263	444	642	783	839	849
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.13	7.89	19.2	36.0	64.6	118	218	371	554	713	798	824
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.88	9.52	21.4	39.9	71.1	127	226	369	538	689	776	802
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	6.40	16.7	31.9	55.2	94.2	161	261	388	517	609	647
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.85	17.1	31.6	51.8	82.7	130	201	291	391	464	497
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.95	11.5	23.0	37.8	58.7	89.4	133	190	255	308	335
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.09	10.0	19.8	31.0	45.2	63.8	87.0	115	144	168	176
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.35	4.89	13.0	21.7	31.9	44.7	59.9	77.3	95.8	111	119
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.85	9.66	16.2	23.3	31.2	39.5	47.4	54.7	59.5	61.2
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.75	4.17	9.20	14.7	20.7	26.8	32.6	37.7	41.3	43.0
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.17	4.40	8.55	12.6	16.5	19.8	22.4	24.2	24.8
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.77	3.87	5.89	8.56	11.3	13.5	15.0	15.9
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.77	3.80	5.34	6.38	7.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.66	1.71	2.54	3.10	3.45	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.7V I:0.1344A P:8.934W PF:0.5504 Freq:50.00Hz Lamp Flux:488.075x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070090
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	1.81	1.70	1.27	0.68	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	3.63	3.25	2.31	1.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	20.4	19.2	16.6	13.1	9.28	6.28	3.55	1.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	37.0	34.3	29.6	23.6	17.3	11.4	6.09	1.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	85.8	79.6	67.4	53.7	40.3	28.2	18.0	9.93	4.43	0.98	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	134	121	99.9	78.4	58.2	40.4	26.3	15.6	7.34	0.78	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	305	274	219	160	108	70.7	44.8	27.5	15.4	6.49	1.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	469	407	314	220	141	89.0	55.2	33.8	19.4	9.19	1.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	634	587	489	358	232	138	80.6	47.1	27.3	14.5	5.35	0.21	0.00	0.00	0.00	0.00	0.00	0.00
-10	790	736	614	444	278	160	89.6	50.8	29.2	15.7	6.34	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	822	794	701	529	343	198	110	61.9	35.3	19.4	8.96	1.15	0.00	0.00	0.00	0.00	0.00	0.00
0	850	828	729	538	340	193	106	59.8	34.0	18.3	8.18	0.57	0.00	0.00	0.00	0.00	0.00	0.00
5	825	798	704	530	343	200	113	65.1	37.8	21.0	9.95	1.93	0.00	0.00	0.00	0.00	0.00	0.00
10	795	744	619	445	278	163	95.4	57.0	33.7	18.5	8.25	0.63	0.00	0.00	0.00	0.00	0.00	0.00
15	645	600	504	372	243	147	89.2	55.0	33.7	19.2	8.85	1.24	0.00	0.00	0.00	0.00	0.00	0.00
20	483	425	340	245	161	103	66.3	43.1	27.1	15.1	6.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	331	298	246	185	129	86.8	58.3	39.1	25.2	14.6	5.96	0.25	0.00	0.00	0.00	0.00	0.00	0.00
30	170	153	128	102	77.7	57.3	41.3	28.9	18.8	10.2	2.82	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	116	107	92.7	76.2	60.3	46.1	34.1	24.3	15.9	8.52	2.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	60.0	56.4	50.9	44.2	36.9	29.7	22.7	16.2	10.0	4.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	42.6	40.6	37.2	32.8	27.8	22.6	17.3	12.0	6.90	2.59	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	24.7	23.7	21.9	19.5	16.7	13.4	9.69	5.83	1.75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	15.9	15.4	14.2	12.5	10.4	7.86	5.22	3.31	1.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	7.11	6.65	5.81	4.66	3.15	1.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	3.56	3.39	3.00	2.46	1.74	0.82	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

$H(\beta)$ Range:-90 - 90DEG
 $H(\beta)$ Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2025-07-31

$V(\beta)$ Range:-80 - 80DEG
 $V(\beta)$ Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks: