

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2001.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	65.3V x 65.1H
	At 50% of Imax	42.7V x 42.4H
	At 90% of Imax	22.6V x 24.6H
Beam Flux	Total	993.8 lumens per klm.
	To 10% of Imax	943.7 lumens per klm.
	To 50% of Imax	646.8 lumens per klm.
	To 90% of Imax	235.4 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.4 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.7V I:0.0711A P:9.236W PF:0.4675 Freq:50.00Hz Lamp Flux:127.474x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070095
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

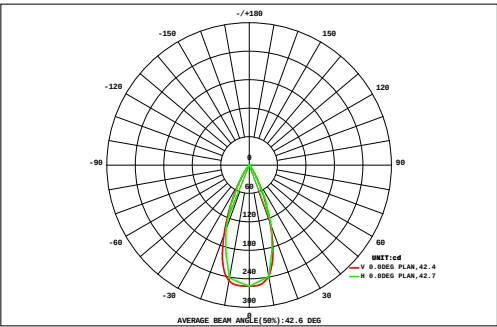

DATA OF LAMP		Eff:13.80lm/W	
MODE	SP-PZT-R135-6P-RDM-B	Imax(cd)	255.2
NOMINAL POWER(W)	9	AVAILABILITY(%)	95.9
RATED VOLTAGE(V)	277	Avai. FLUX(lm)	122.2
NOMINAL FLUX(lm)	127.474	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	127.5
TEST VOLTAGE(V)	277	θ @50%(H,V)	42,43DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.03	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.00	0.16	0.00
45	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.05	0.05	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.26	0.00
40	0.00	0.00	0.00	0.01	0.05	0.09	0.15	0.21	0.25	0.26	0.24	0.20	0.14	0.09	0.04	0.01	0.00	0.00	1.74	1.01
35	0.00	0.00	0.00	0.03	0.09	0.17	0.26	0.35	0.40	0.40	0.36	0.29	0.20	0.13	0.06	0.01	0.00	0.00	2.76	2.30
30	0.00	0.00	0.00	0.03	0.09	0.20	0.35	0.54	0.73	0.87	0.91	0.85	0.71	0.52	0.33	0.18	0.08	0.02	6.42	6.07
25	0.00	0.00	0.06	0.17	0.34	0.58	0.86	1.11	1.27	1.29	1.17	0.94	0.67	0.41	0.22	0.10	0.02	0.00	9.20	8.91
20	0.00	0.01	0.07	0.20	0.43	0.75	1.13	1.43	1.60	1.66	1.61	1.41	1.08	0.71	0.40	0.19	0.07	0.01	12.7	12.5
15	0.00	0.03	0.14	0.34	0.67	1.11	1.58	1.89	2.01	2.02	1.93	1.67	1.24	0.78	0.41	0.19	0.06	0.00	16.1	15.8
10	0.00	0.01	0.09	0.26	0.56	0.99	1.46	1.77	1.89	1.92	1.89	1.76	1.43	0.96	0.54	0.25	0.10	0.02	15.9	15.7
5	0.00	0.03	0.15	0.38	0.77	1.28	1.72	1.93	1.97	1.97	1.94	1.78	1.39	0.88	0.46	0.20	0.07	0.00	16.9	16.7
0	0.00	0.00	0.05	0.20	0.46	0.86	1.31	1.65	1.81	1.85	1.81	1.64	1.30	0.87	0.49	0.22	0.08	0.01	14.6	14.4
-5	0.00	0.01	0.07	0.23	0.51	0.90	1.31	1.61	1.75	1.79	1.69	1.42	1.02	0.63	0.32	0.13	0.03	0.00	13.4	13.2
-10	0.00	0.00	0.01	0.08	0.22	0.45	0.72	0.99	1.17	1.24	1.18	1.01	0.76	0.48	0.26	0.11	0.03	0.00	8.73	8.48
-15	0.00	0.00	0.01	0.06	0.17	0.31	0.49	0.68	0.81	0.85	0.74	0.54	0.33	0.17	0.07	0.02	0.00	0.00	5.24	4.93
-20	0.00	0.00	0.00	0.01	0.04	0.11	0.21	0.31	0.39	0.42	0.41	0.34	0.24	0.15	0.06	0.02	0.00	0.00	2.72	2.28
-25	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.05	0.06	0.06	0.05	0.04	0.02	0.01	0.00	0.00	0.00	0.00	0.32	0.00
-30	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.05	0.05	0.05	0.05	0.03	0.02	0.01	0.00	0.00	0.00	0.33	0.00
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	0.00	0.09	0.67	2.06	4.50	7.99	11.8	14.8	16.4	16.8	16.0	13.8	10.4	6.61	3.52	1.53	0.48	0.04	127	---
Φ a	0.00	0.00	0.13	1.57	4.13	7.70	11.5	14.5	16.2	16.6	15.8	13.6	10.1	6.21	3.19	0.93	0.00	0.00	---	122


one-half-peak spread: U:21.0,D:21.9 , L:21.3,R:17.4 NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:277.7V I:0.0711A P:9.236W PF:0.4675 Freq:50.00Hz Lamp Flux:127.474x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070095
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

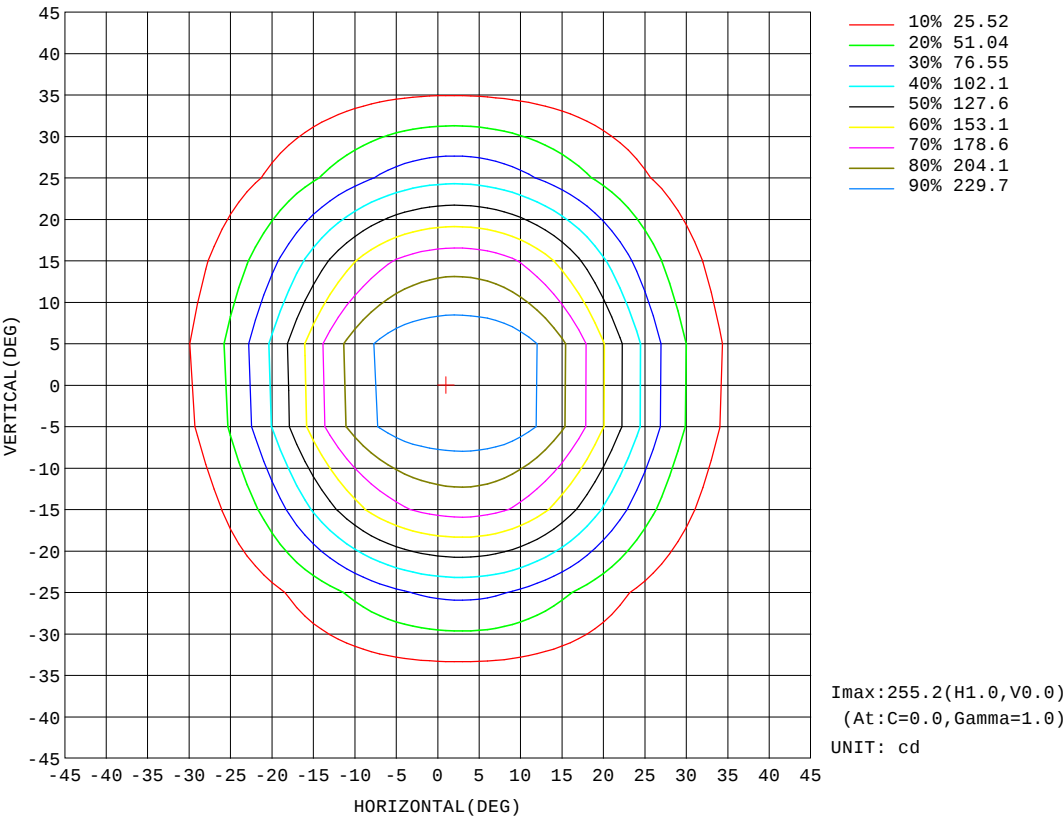


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:277.7V I:0.0711A P:9.236W PF:0.4675 Freq:50.00Hz Lamp Flux:127.474x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070095
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

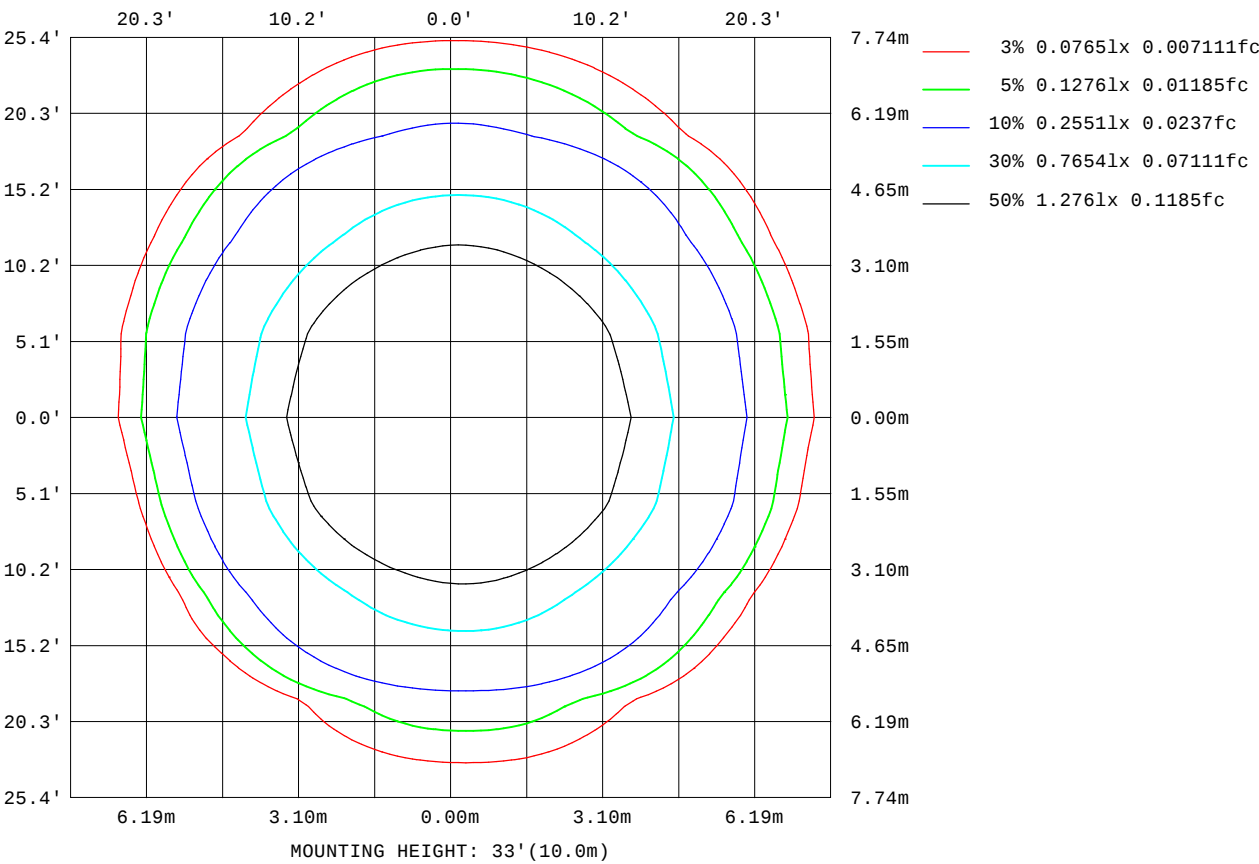

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

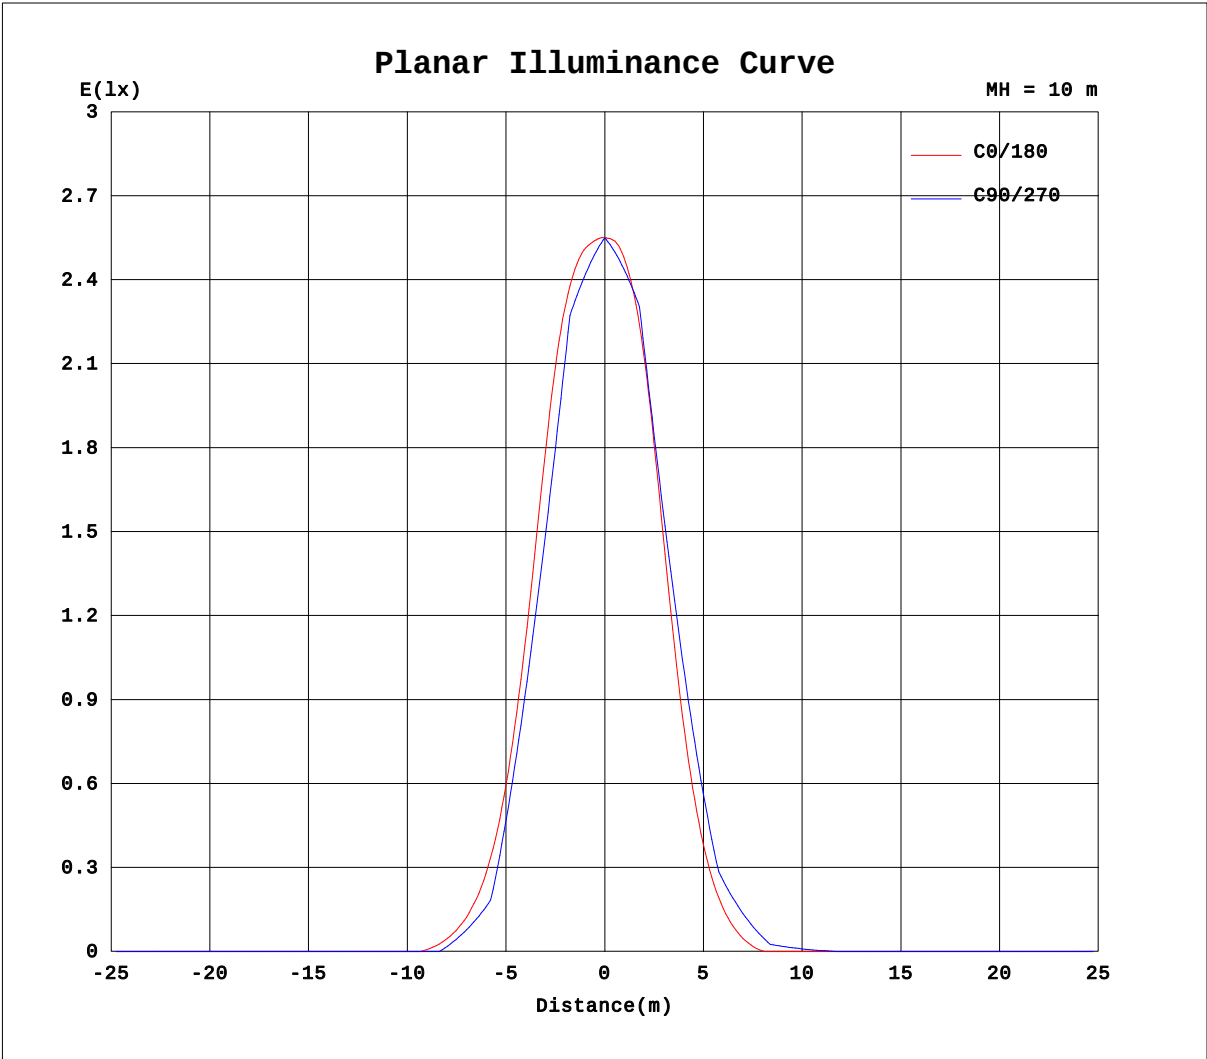


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.7V I:0.0711A P:9.236W PF:0.4675 Freq:50.00Hz Lamp Flux:127.474x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070095
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

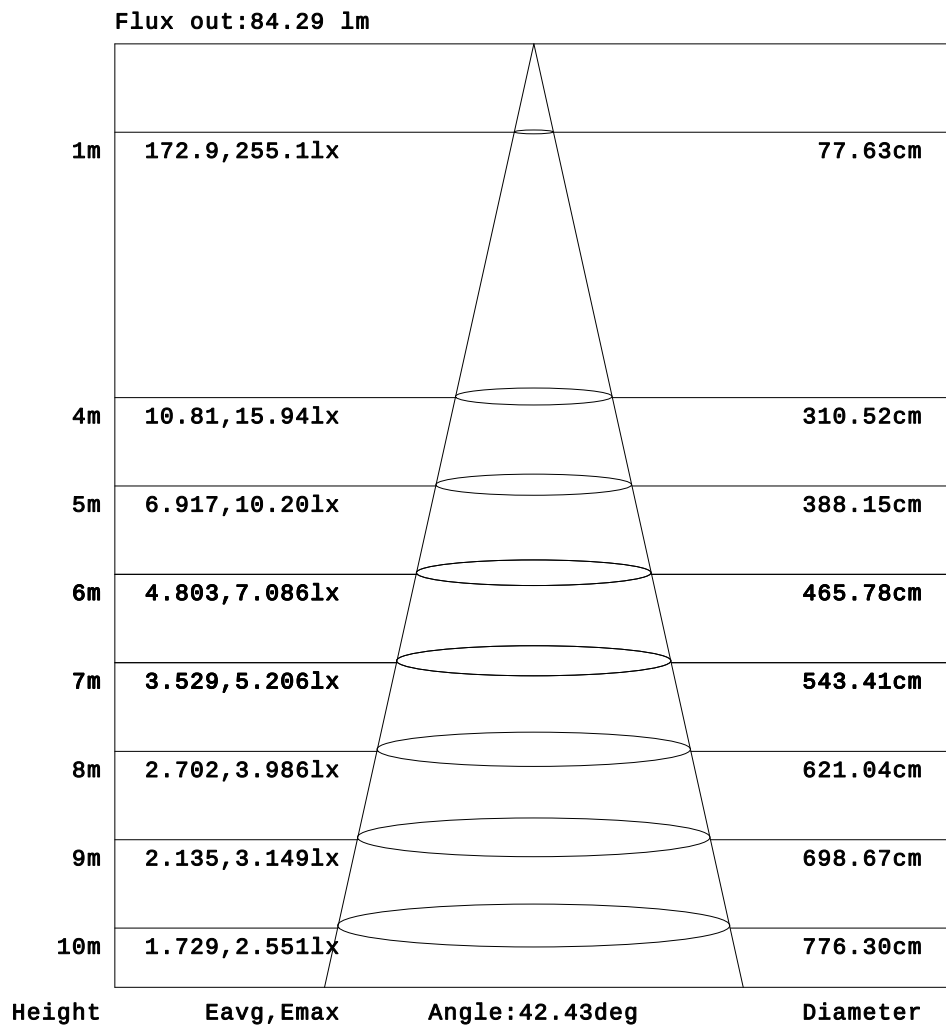

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.7V I:0.0711A P:9.236W PF:0.4675 Freq:50.00Hz Lamp Flux:127.474x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070095
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.51	5.33	9.14	12.4	14.1
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.42	12.2	19.7	25.7	28.5
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.93	8.59	20.5	37.6	56.2	81.7
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.98	20.7	42.9	70.3	100	124	137
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.21	10.4	30.7	63.2	104	145	173	186
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.60	21.2	51.8	99.1	155	203	229	238
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.86	21.9	53.5	103	163	213	238	246
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	10.3	32.8	72.1	130	193	237	253	255
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.87	25.0	57.1	106	165	215	241	248
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	9.10	27.7	59.0	105	160	207	233	242
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.76	16.9	38.4	70.8	112	152	180	193
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.67	13.1	28.9	51.9	81.1	111	134	145
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.54	5.33	15.3	29.7	48.3	68.1	85.0	94.0
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.56	6.82	14.4	23.4	32.9	40.8	44.0
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.73	6.39	11.1	17.1	22.2	24.8
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.11	3.53	5.20	5.78
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.30	1.54	2.48	2.88
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2025-07-31

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.7V I:0.0711A P:9.236W PF:0.4675 Freq:50.00Hz Lamp Flux:127.474x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070095
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	14.2	12.5	9.25	5.75	2.43	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	28.1	23.9	17.1	10.1	3.59	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	82.2	72.4	55.5	36.7	19.9	8.35	2.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	134	115	86.4	55.9	30.7	13.9	2.87	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	187	173	141	99.9	60.2	30.3	11.3	1.72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	237	220	180	127	75.9	37.5	14.3	1.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	247	238	208	154	95.9	49.9	21.3	5.40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	255	247	216	157	94.8	48.3	20.4	4.91	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	248	239	208	154	96.5	50.9	22.7	6.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	239	222	181	128	77.2	39.6	17.1	4.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	192	177	146	105	64.8	34.3	15.0	3.58	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	141	122	94.5	64.5	38.2	19.5	7.37	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	93.1	82.2	64.8	45.4	27.7	14.1	4.79	0.47	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	42.1	36.0	27.5	18.8	10.9	4.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	24.2	20.9	15.9	10.5	6.21	2.71	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	5.40	4.12	2.20	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	2.78	2.21	1.31	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: