


Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)		1749.0 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	71.2V x 70.7H
	At 50% of Imax	44.2V x 43.3H
	At 90% of Imax	23.4V x 25.1H
Beam Flux	Total	998.3 lumens per klm.
	To 10% of Imax	903.0 lumens per klm.
	To 50% of Imax	591.0 lumens per klm.
	To 90% of Imax	214.4 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.7V I:0.0720A P:9.408W PF:0.4708 Freq:49.99Hz Lamp Flux:504.073x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070094
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

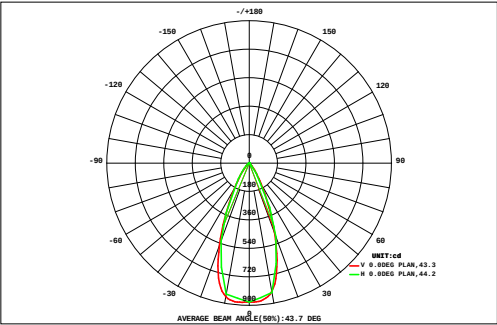

DATA OF LAMP		Eff:53.58lm/W	
MODE:SP-PZT-R135-6P-RDM-G		Imax(cd)	881.6
NOMINAL POWER(W)	9	AVAILABILITY(%)	90.8
RATED VOLTAGE(V)	277	Avai. FLUX(lm)	457.6
NOMINAL FLUX(lm)	504.073	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	504.1
TEST VOLTAGE(V)	277	θ @50%(H,V)	43,44DEG


AREA FLUX DIAGRAM																	UNIT:lm	Φ t	Φ a
72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.05	0.00
64	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.09	0.13	0.14	0.13	0.09	0.04	0.00	0.00	0.00	0.00	0.66	0.00
56	0.00	0.00	0.00	0.00	0.03	0.12	0.23	0.33	0.39	0.41	0.38	0.31	0.21	0.11	0.03	0.00	0.00	2.56	0.00
48	0.00	0.00	0.00	0.02	0.13	0.31	0.53	0.72	0.85	0.87	0.79	0.63	0.45	0.27	0.11	0.02	0.00	5.70	0.00
40	0.00	0.00	0.00	0.09	0.30	0.60	1.01	1.46	1.83	1.87	1.60	1.19	0.78	0.46	0.22	0.05	0.00	11.5	3.80
32	0.00	0.00	0.02	0.18	0.49	1.04	1.90	3.07	4.12	4.20	3.39	2.28	1.33	0.71	0.33	0.10	0.00	23.1	19.0
24	0.00	0.00	0.04	0.26	0.73	1.76	3.74	6.81	9.61	9.90	7.77	4.77	2.34	1.05	0.45	0.15	0.01	49.4	46.4
	0.00	0.00	0.05	0.29	0.91	2.56	6.11	11.0	14.5	14.9	12.8	8.11	3.69	1.46	0.57	0.18	0.02	77.2	74.7
	0.00	0.00	0.06	0.32	1.01	3.10	7.82	14.0	17.1	17.4	15.7	10.3	4.62	1.70	0.61	0.18	0.02	94.0	91.6
	0.00	0.00	0.06	0.31	1.01	3.23	8.29	14.3	16.8	17.0	15.5	10.1	4.43	1.57	0.53	0.15	0.01	93.3	91.0
	0.00	0.00	0.04	0.24	0.72	2.30	6.14	11.4	14.9	15.4	13.1	8.08	3.57	1.29	0.43	0.12	0.01	77.8	75.3
	0.00	0.00	0.01	0.14	0.45	1.21	3.02	5.99	8.82	9.47	7.52	4.47	2.07	0.85	0.30	0.07	0.00	44.4	41.4
-24	0.00	0.00	0.00	0.04	0.22	0.59	1.33	2.46	3.59	3.91	3.17	1.97	1.02	0.46	0.15	0.02	0.00	18.9	14.5
-32	0.00	0.00	0.00	0.00	0.06	0.19	0.38	0.58	0.73	0.76	0.69	0.53	0.35	0.15	0.03	0.00	0.00	4.45	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.13	0.19	0.21	0.18	0.13	0.06	0.01	0.00	0.00	0.00	0.99	0.00
-48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.02	0.02	0.01	0.01	0.00	0.00	0.00	0.00	0.10	0.00
-56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72		
Φ t	0.00	0.00	0.28	1.89	6.07	17.0	40.6	72.4	93.6	96.6	82.7	53.0	25.0	10.1	3.78	1.03	0.07	0.00	504
Φ a	0.00	0.00	0.00	0.00	0.65	12.5	37.2	69.3	90.2	93.1	79.5	50.0	20.8	4.21	0.00	0.00	0.00	0.00	458

one-half-peak spread: U:21.7,D:22.8 , L:18.8,R:18.7 NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31
V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:277.7V I:0.0720A P:9.408W PF:0.4708 Freq:49.99Hz Lamp Flux:504.073x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070094
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

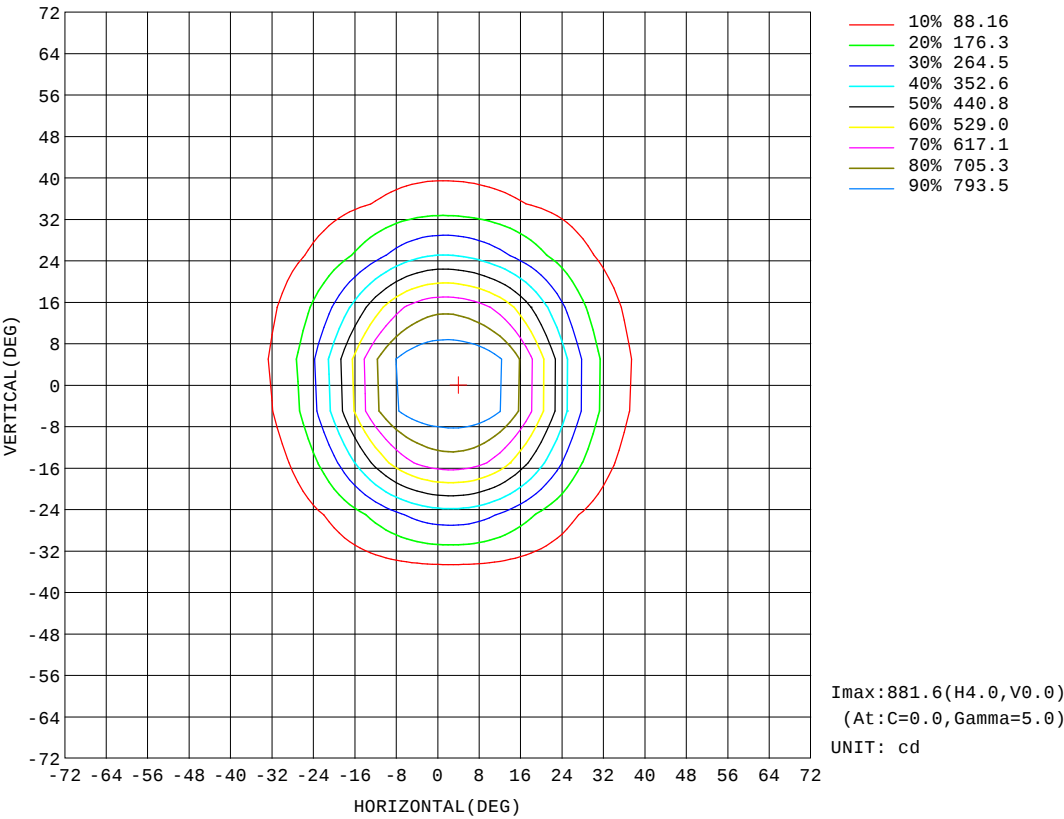


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:277.7V I:0.0720A P:9.408W PF:0.4708 Freq:49.99Hz Lamp Flux:504.073x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070094
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

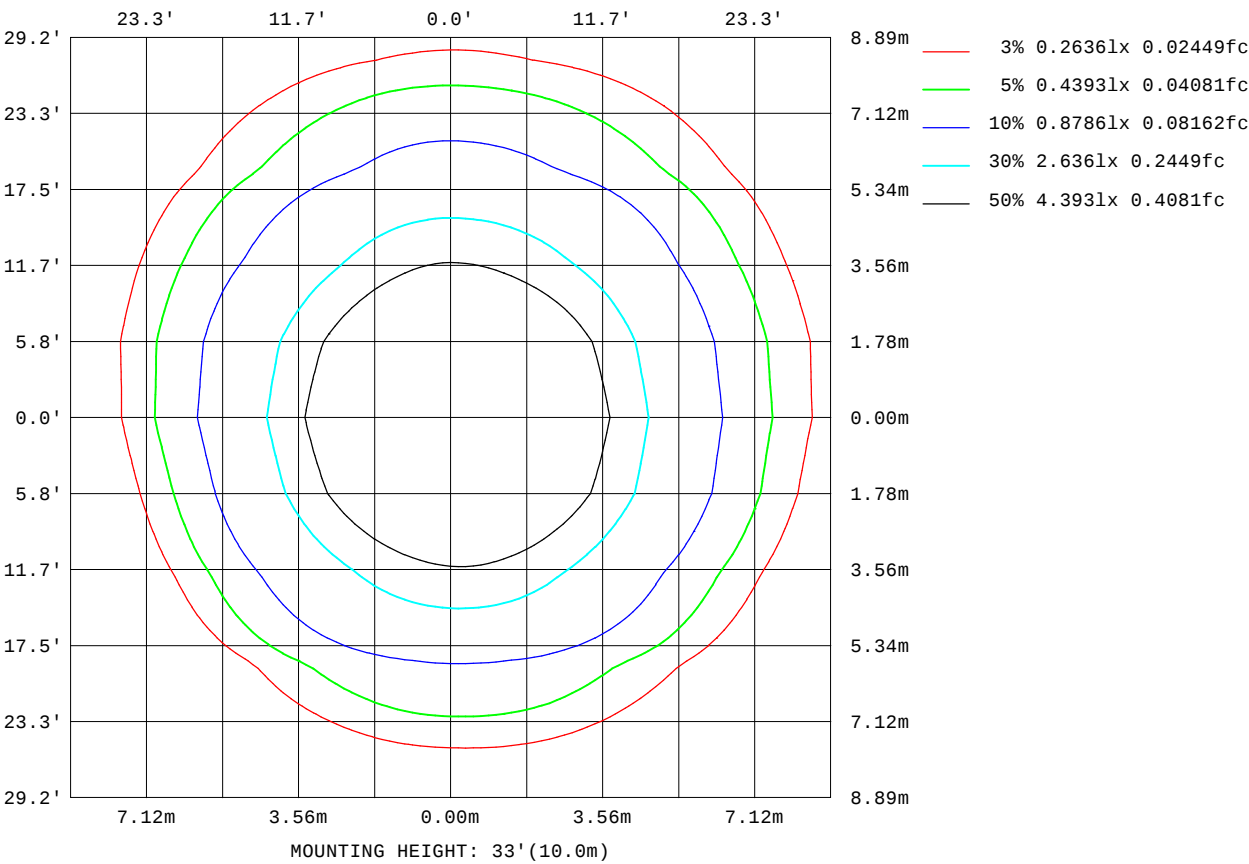

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

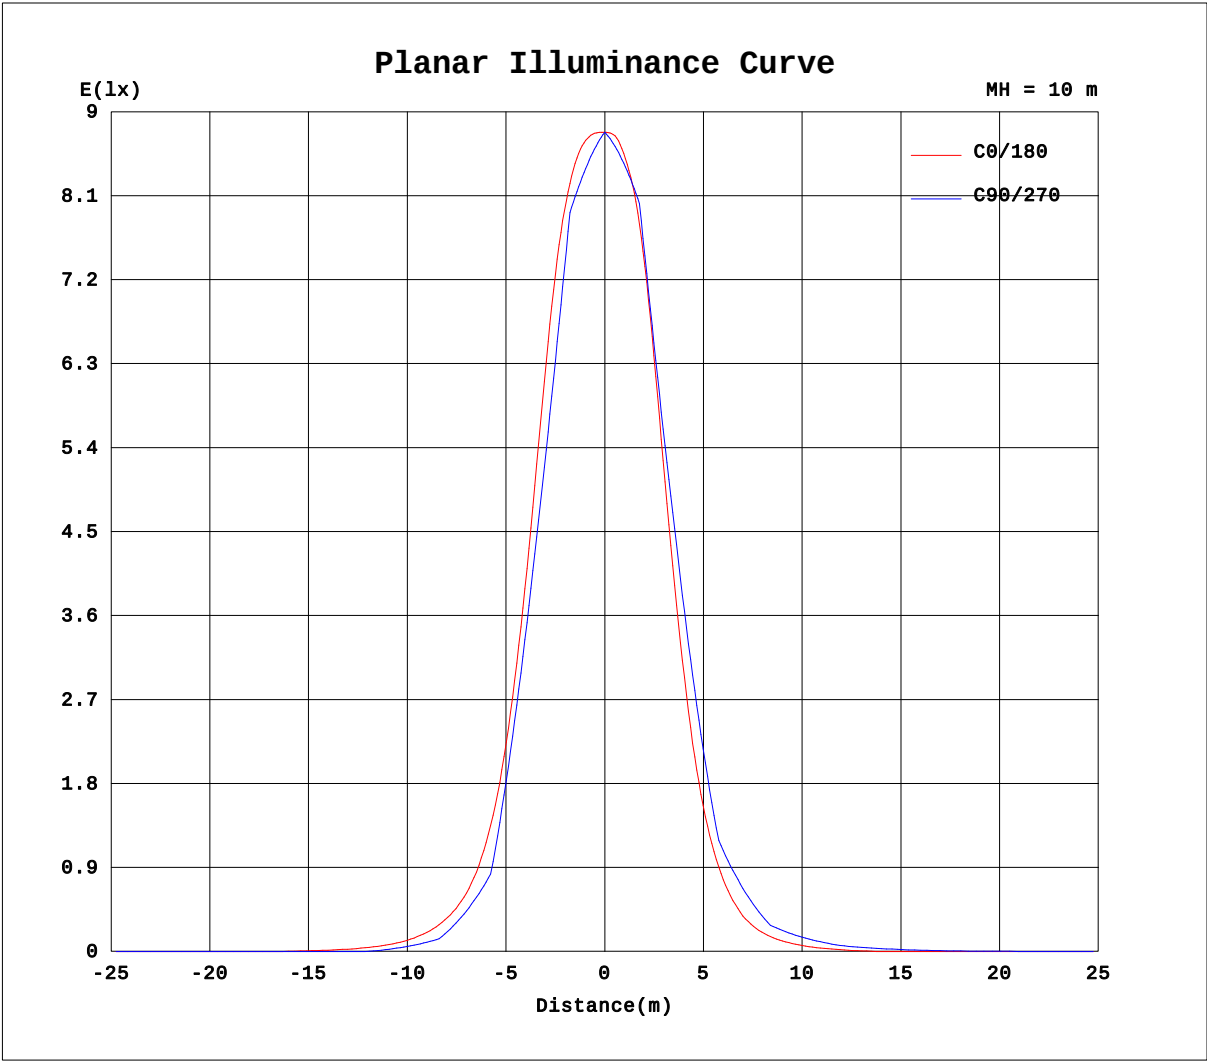


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.7V I:0.0720A P:9.408W PF:0.4708 Freq:49.99Hz Lamp Flux:504.073x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070094
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

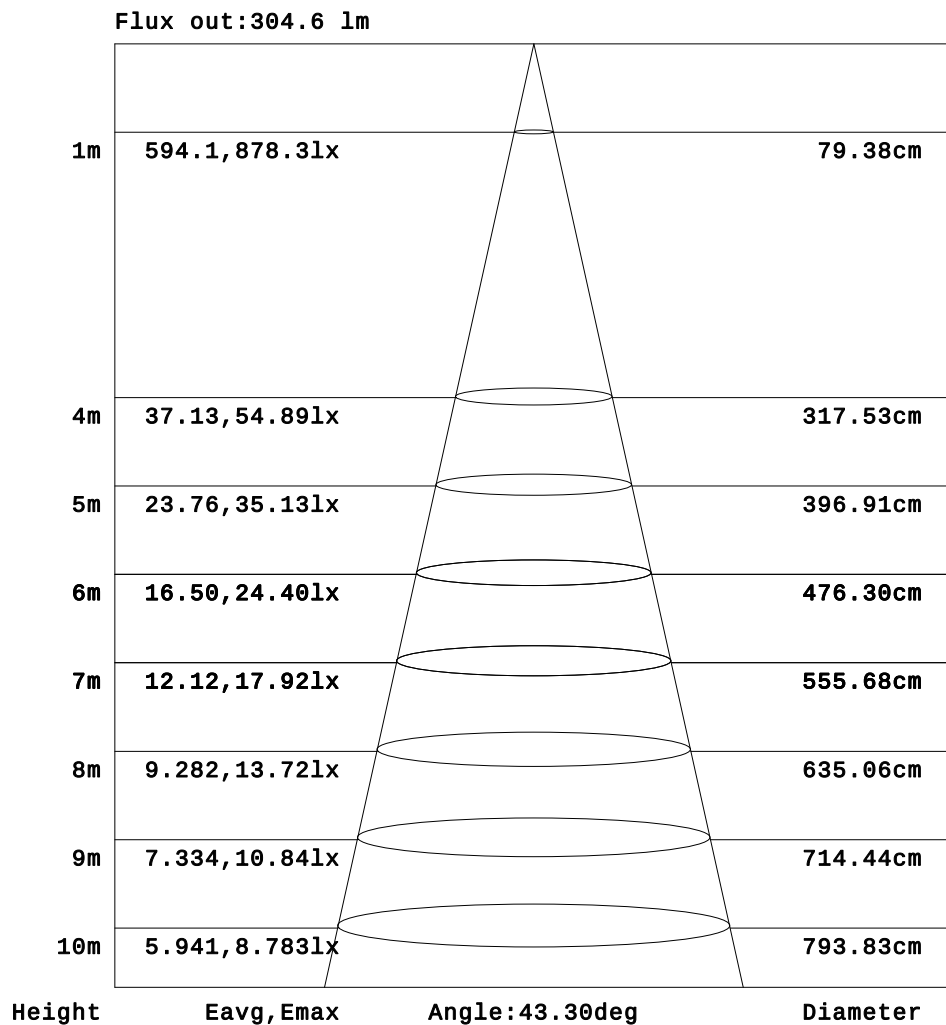

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.7V I:0.0720A P:9.408W PF:0.4708 Freq:49.99Hz Lamp Flux:504.073x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070094
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd			
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.34	0.67	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.85	1.42	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.27	3.31	5.56	8.13	11.2	14.3	16.0	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.34	7.47	12.1	17.4	23.7	28.7	30.8	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.03	5.56	11.7	20.4	32.2	46.6	60.8	73.0	79.2	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.27	5.27	12.8	23.3	37.6	57.8	81.4	103	121	128	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	3.59	10.4	20.8	37.1	64.8	107	163	225	278	309	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.07	8.87	19.0	34.0	59.9	107	177	268	371	453	494	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.38	10.4	21.7	39.5	74.1	141	247	381	515	612	659	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.24	15.9	30.0	55.3	109	212	366	548	707	798	830	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	5.93	15.6	30.3	57.0	113	217	380	575	742	827	853	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.95	9.05	20.2	38.5	75.4	150	277	468	679	825	873	878	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	7.22	17.5	34.0	64.6	125	230	392	586	751	834	858	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.93	8.81	20.0	38.8	72.4	134	239	391	569	725	811	840	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	6.10	15.7	30.9	55.5	98.6	169	275	407	542	639	681	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.61	16.3	30.9	52.2	86.5	136	208	301	408	492	526	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.85	11.0	22.4	37.6	60.6	93.3	138	197	265	325	354	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.03	9.76	19.2	30.6	46.3	66.2	90.0	118	149	174	184	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.33	4.79	12.6	21.2	32.2	46.0	61.8	79.6	98.6	115	123	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.81	9.39	15.8	23.2	31.9	40.4	48.5	55.9	61.1	63.1	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.75	4.06	8.93	14.6	20.9	27.3	33.3	38.4	42.3	44.0	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.13	4.24	8.40	12.5	16.7	20.2	22.7	24.4	25.2	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.69	3.80	5.84	8.66	11.6	13.8	15.3	16.2	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.84	3.98	5.58	6.68	7.33	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.70	1.79	2.65	3.25	3.62	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.7V I:0.0720A P:9.408W PF:0.4708 Freq:49.99Hz Lamp Flux:504.073x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070094
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.88	0.70	0.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	1.67	1.29	0.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	16.5	15.4	13.3	10.4	7.53	4.73	2.35	0.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	31.0	28.9	25.0	19.7	13.9	8.43	3.84	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	79.3	73.8	62.6	49.5	36.6	25.0	15.3	7.66	3.38	0.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	127	115	95.2	73.9	54.4	37.4	23.4	12.9	5.42	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	309	277	222	161	108	68.7	42.2	24.5	12.9	4.86	0.74	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	483	420	325	226	142	87.6	52.7	30.7	16.6	7.40	0.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	659	610	505	370	239	141	80.6	45.0	24.6	12.3	3.93	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	824	767	635	459	288	165	91.0	49.3	26.6	13.4	4.87	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	855	825	724	546	353	204	112	62.0	33.7	17.3	7.45	0.49	0.00	0.00	0.00	0.00	0.00	0.00
0	882	857	752	553	348	197	108	60.7	32.8	16.4	6.89	0.13	0.00	0.00	0.00	0.00	0.00	0.00
5	856	827	731	549	354	206	116	66.5	37.6	19.6	8.80	1.21	0.00	0.00	0.00	0.00	0.00	0.00
10	826	772	647	465	291	170	98.3	58.3	33.8	17.5	7.42	0.38	0.00	0.00	0.00	0.00	0.00	0.00
15	671	620	522	386	253	153	92.0	56.4	34.0	18.5	8.11	0.88	0.00	0.00	0.00	0.00	0.00	0.00
20	503	437	346	252	168	107	68.2	44.0	27.1	14.5	5.57	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	345	307	251	190	134	89.6	59.9	39.9	25.4	14.2	5.49	0.17	0.00	0.00	0.00	0.00	0.00	0.00
30	176	157	131	104	79.4	58.6	42.2	29.3	18.7	9.93	2.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	120	110	94.7	77.8	61.6	47.1	34.9	24.7	15.9	8.30	1.93	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	61.7	57.7	51.9	45.1	37.6	30.3	23.1	16.3	9.95	3.82	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	43.7	41.5	38.1	33.4	28.4	23.1	17.6	12.2	6.85	2.51	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	25.0	24.3	22.6	19.9	17.1	13.7	9.94	5.91	1.68	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	16.3	15.8	14.7	12.8	10.7	8.15	5.36	3.37	1.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	7.45	7.00	6.11	4.95	3.40	1.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	3.73	3.57	3.16	2.60	1.88	0.92	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: