


Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)		1744.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	72.6V x 70.7H
	At 50% of Imax	43.9V x 43.2H
	At 90% of Imax	22.8V x 24.6H
Beam Flux	Total	998.6 lumens per klm.
	To 10% of Imax	900.2 lumens per klm.
	To 50% of Imax	583.9 lumens per klm.
	To 90% of Imax	204.2 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.6V I:0.0723A P:9.475W PF:0.4720 Freq:50.00Hz Lamp Flux:486.312x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070096
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

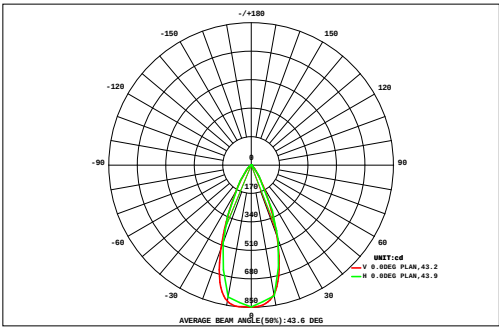

DATA OF LAMP		Eff:51.33lm/W	
MODE	SP-PZT-R135-6P-RDM-W	Imax(cd)	848.3
NOMINAL POWER(W)	9	AVAILABILITY(%)	90.3
RATED VOLTAGE(V)	277	Avai. FLUX(lm)	439.2
NOMINAL FLUX(lm)	486.312	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	486.3
TEST VOLTAGE(V)	277	θ @50%(H,V)	43,44DEG

AREA FLUX DIAGRAM																	UNIT:lm	Φ t	Φ a
72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.04	0.00
64	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.09	0.13	0.14	0.12	0.09	0.04	0.00	0.00	0.00	0.00	0.64	0.00
56	0.00	0.00	0.00	0.00	0.04	0.13	0.23	0.33	0.39	0.40	0.37	0.30	0.21	0.11	0.03	0.00	0.00	2.53	0.00
48	0.00	0.00	0.00	0.02	0.14	0.32	0.52	0.71	0.84	0.85	0.77	0.62	0.44	0.26	0.11	0.02	0.00	5.61	0.00
40	0.00	0.00	0.00	0.09	0.31	0.60	0.99	1.43	1.78	1.81	1.55	1.15	0.76	0.44	0.22	0.05	0.00	11.2	3.72
32	0.00	0.00	0.02	0.19	0.50	1.01	1.84	2.98	3.96	4.03	3.28	2.20	1.28	0.68	0.32	0.10	0.00	22.4	18.3
24	0.00	0.00	0.04	0.27	0.74	1.70	3.63	6.60	9.10	9.46	7.54	4.59	2.21	1.01	0.44	0.15	0.01	47.5	44.5
	0.00	0.00	0.06	0.32	0.92	2.46	5.85	10.6	13.8	14.3	12.3	7.70	3.47	1.39	0.55	0.18	0.02	73.9	71.3
	0.00	0.00	0.07	0.34	1.02	2.96	7.46	13.3	16.4	16.7	15.1	9.85	4.38	1.62	0.59	0.19	0.02	89.9	87.6
	0.00	0.00	0.07	0.35	1.03	3.10	7.92	13.6	16.1	16.3	14.9	9.71	4.24	1.50	0.53	0.16	0.01	89.6	87.2
	0.00	0.00	0.04	0.27	0.79	2.26	5.90	11.0	14.2	14.7	12.5	7.68	3.36	1.24	0.45	0.13	0.01	74.5	72.0
	0.00	0.00	0.01	0.16	0.51	1.28	2.98	5.68	8.40	9.11	7.19	4.27	2.01	0.86	0.33	0.08	0.00	42.9	39.9
-24	0.00	0.00	0.00	0.05	0.26	0.66	1.35	2.42	3.54	3.91	3.15	1.96	1.04	0.49	0.18	0.03	0.00	19.0	14.6
-32	0.00	0.00	0.00	0.00	0.07	0.24	0.43	0.66	0.83	0.88	0.78	0.60	0.40	0.18	0.04	0.00	0.00	5.13	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.04	0.10	0.17	0.25	0.27	0.24	0.16	0.08	0.02	0.00	0.00	0.00	1.34	0.00
-48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.04	0.03	0.02	0.01	0.01	0.00	0.00	0.00	0.15	0.00
-56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72		
Φ t	0.00	0.00	0.31	2.07	6.33	16.7	39.2	69.5	89.7	93.0	79.8	50.9	23.9	9.82	3.80	1.09	0.08	0.00	486
Φ a	0.00	0.00	0.00	0.00	0.68	12.4	35.9	66.4	86.2	89.4	76.5	47.9	19.9	3.93	0.00	0.00	0.00	0.00	439


one-half-peak spread: U:21.7,D:22.5 , L:25.7,R:17.7 NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:277.6V I:0.0723A P:9.475W PF:0.4720 Freq:50.00Hz Lamp Flux:486.312x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070096
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

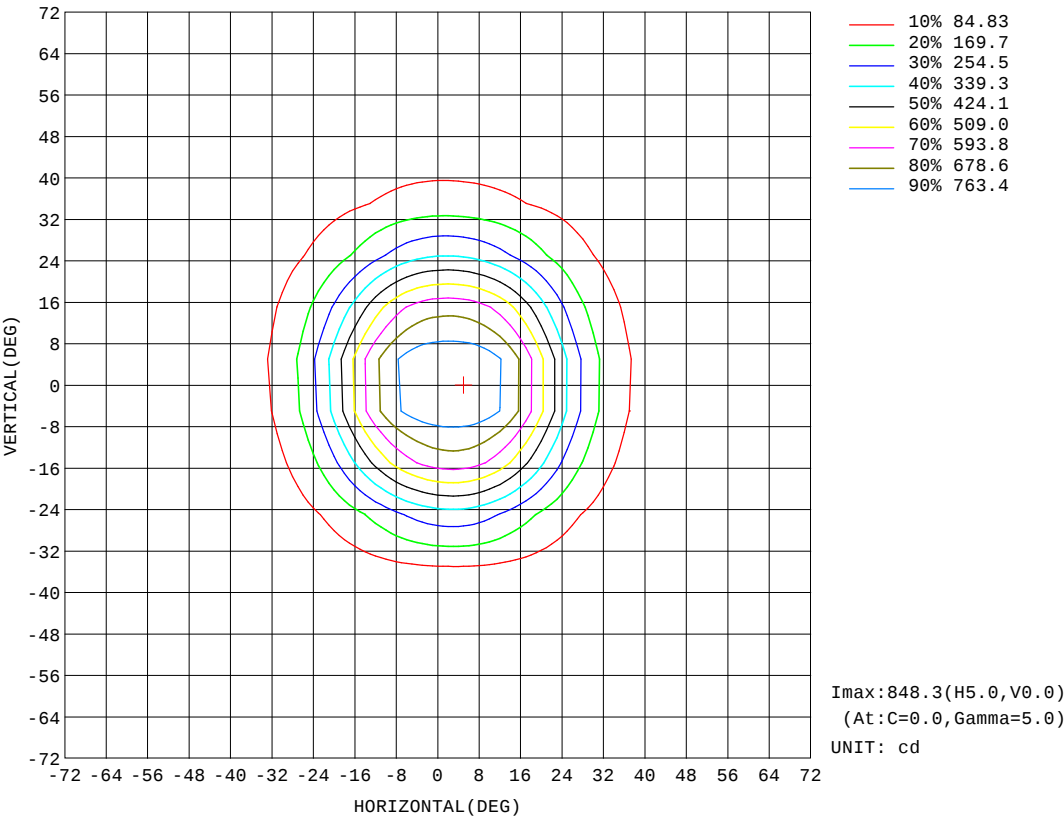


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:277.6V I:0.0723A P:9.475W PF:0.4720 Freq:50.00Hz Lamp Flux:486.312x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070096
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

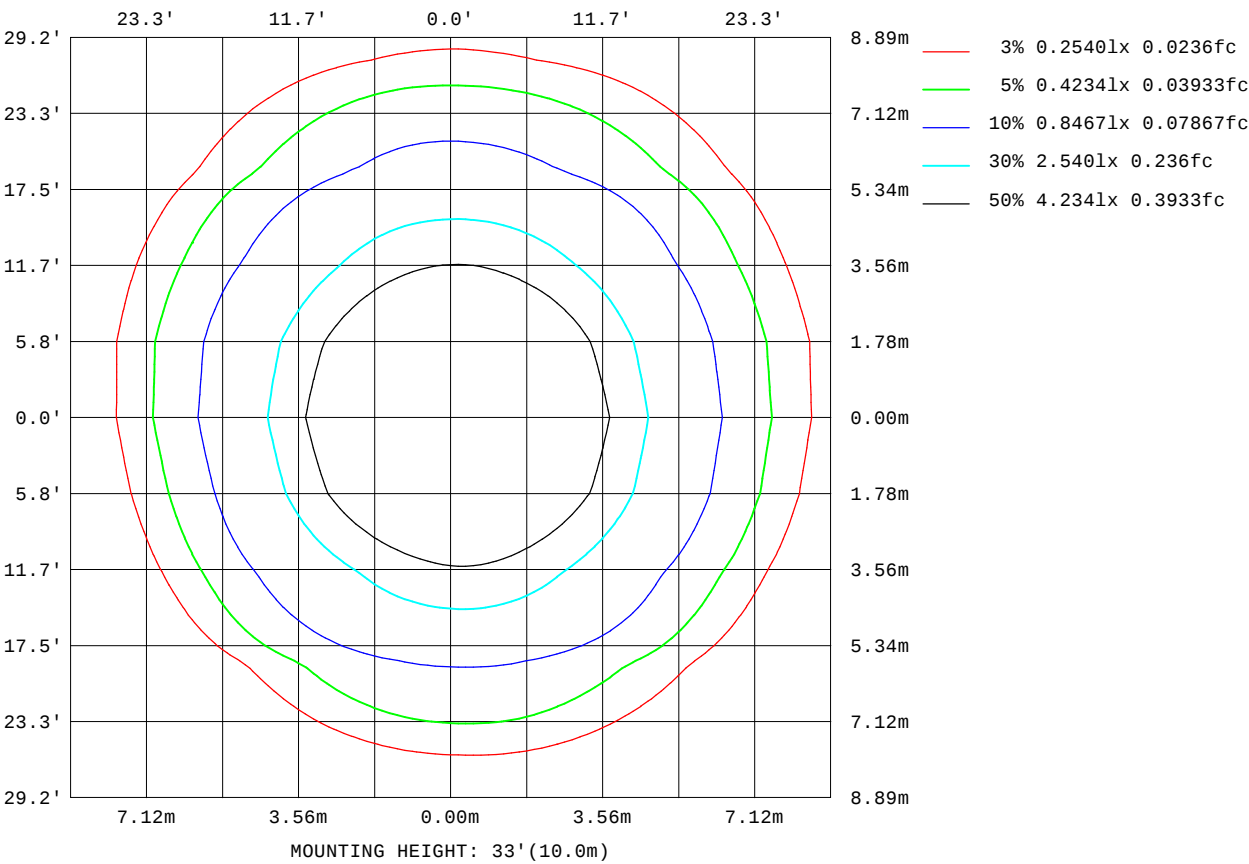

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

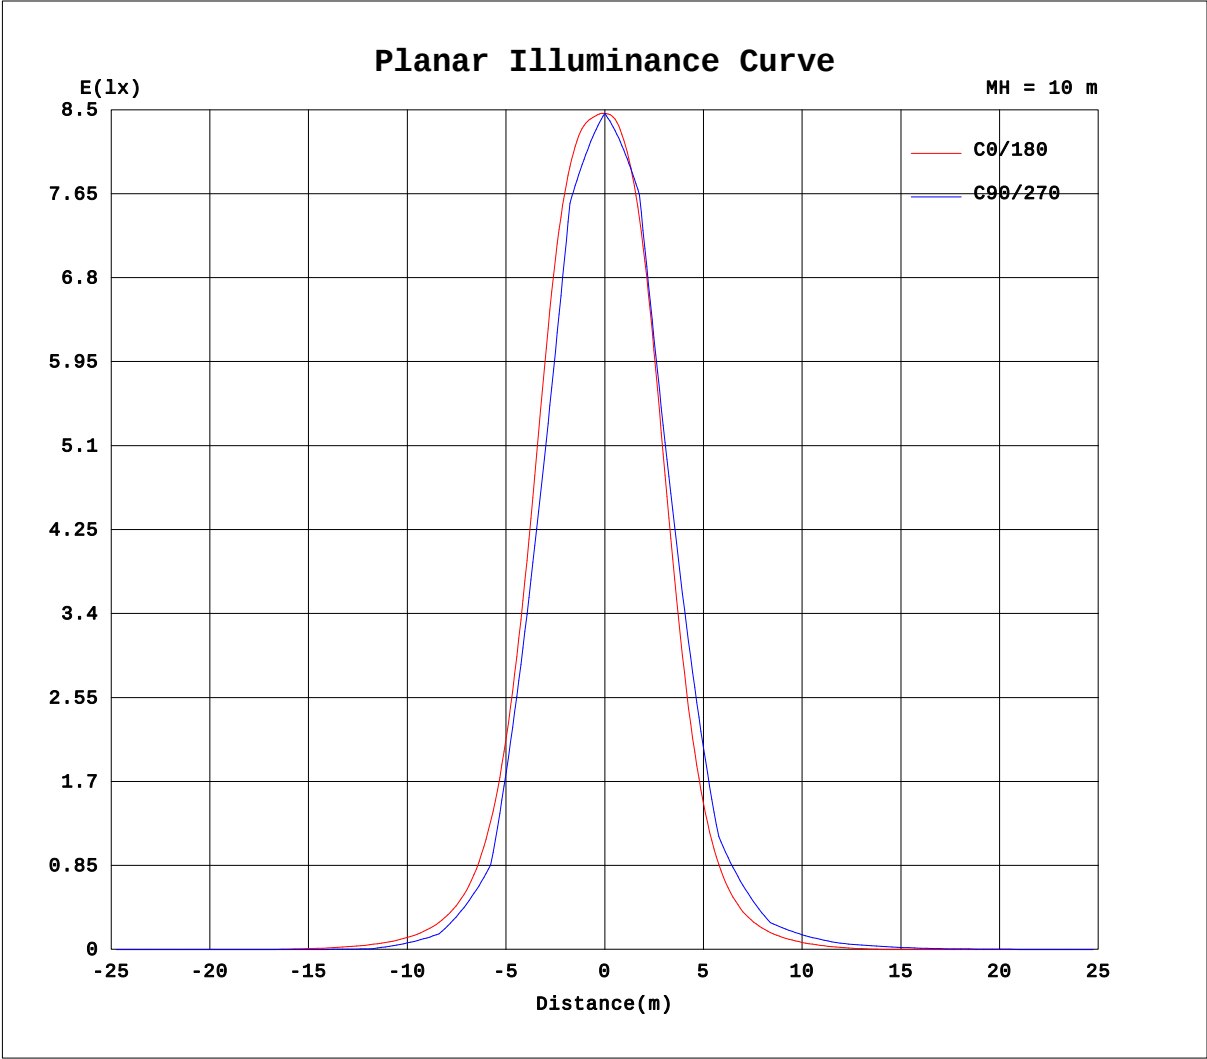


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.6V I:0.0723A P:9.475W PF:0.4720 Freq:50.00Hz Lamp Flux:486.312x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070096
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

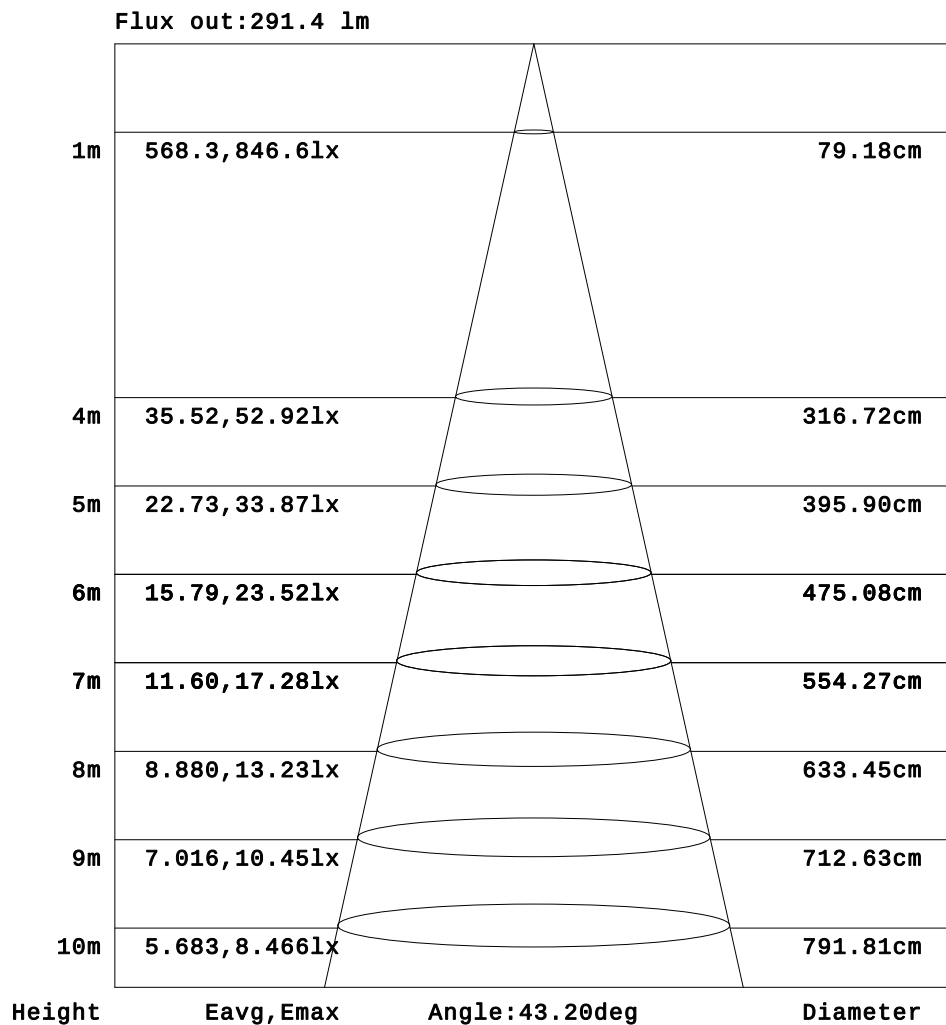

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.6V I:0.0723A P:9.475W PF:0.4720 Freq:50.00Hz Lamp Flux:486.312x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070096
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1 UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.48	1.13	1.44
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.27	2.43	2.94
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	2.14	4.60	7.21	9.99	13.6	17.2	19.2
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.70	5.24	10.2	15.5	21.1	27.4	33.1	35.8
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.65	6.78	14.2	23.5	34.7	48.6	63.6	76.4	83.5
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.54	6.69	15.3	26.7	40.9	59.0	82.1	105	124	132
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	4.17	12.3	24.0	41.2	67.7	108	158	215	268	300
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.38	10.3	21.9	38.5	64.6	108	175	257	350	430	474
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.76	12.0	24.7	43.8	77.0	139	239	366	491	581	629
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	7.03	18.1	33.8	59.5	109	204	351	527	677	759	792
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	6.64	17.6	33.4	59.7	110	209	364	550	708	789	817
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.08	10.1	22.5	41.2	75.0	143	266	448	646	784	838	847
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.13	7.92	19.2	36.3	65.1	120	221	375	559	715	798	823
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.98	9.65	21.7	40.3	71.9	129	229	373	543	692	777	801
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	6.55	16.9	32.3	55.8	95.2	163	264	392	520	610	647
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7.02	17.3	32.0	52.3	83.4	131	202	294	393	466	497
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.11	11.7	23.3	38.2	59.2	90.2	134	192	257	309	335
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.26	10.3	20.0	31.3	45.6	64.3	87.5	115	145	168	176
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.44	5.10	13.3	21.9	32.2	45.0	60.3	77.7	96.2	112	118
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.05	9.86	16.4	23.5	31.5	39.7	47.6	54.8	59.5	61.2
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.85	4.27	9.39	14.9	20.9	27.0	32.7	37.8	41.4	43.0
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.27	4.60	8.72	12.8	16.7	20.0	22.6	24.3	24.9
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.87	3.96	5.99	8.73	11.5	13.7	15.2	16.0
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.94	3.97	5.51	6.54	7.16	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.75	1.80	2.63	3.18	3.53	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.6V I:0.0723A P:9.475W PF:0.4720 Freq:50.00Hz Lamp Flux:486.312x1 lm		
NAME: 8.03.035.0003 45° SP-PZT-R135-6P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070096
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	1.53	1.42	1.00	0.39	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	3.04	2.70	1.76	0.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	19.7	18.5	15.9	12.4	8.90	5.91	3.20	0.84	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	36.2	33.5	28.7	22.8	16.6	10.7	5.40	0.82	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	84.6	78.2	66.0	52.4	39.1	27.1	17.1	9.17	4.04	0.63	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	132	119	97.9	76.6	56.7	39.1	25.3	14.8	6.57	0.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	302	270	215	157	106	68.9	43.5	26.5	14.5	5.73	1.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	465	403	309	216	138	86.8	53.7	32.7	18.6	8.40	0.64	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	632	583	484	353	226	135	78.3	45.6	26.2	13.6	4.58	0.03	0.00	0.00	0.00	0.00	0.00	0.00
-10	787	732	608	437	272	156	86.8	49.2	28.0	14.8	5.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	819	791	696	522	336	194	107	60.1	34.2	18.6	8.21	0.67	0.00	0.00	0.00	0.00	0.00	0.00
0	848	825	724	531	334	189	104	58.1	33.0	17.6	7.54	0.27	0.00	0.00	0.00	0.00	0.00	0.00
5	823	795	699	524	337	196	110	63.6	36.9	20.4	9.45	1.49	0.00	0.00	0.00	0.00	0.00	0.00
10	793	740	613	439	273	160	93.5	55.8	33.0	18.0	7.92	0.49	0.00	0.00	0.00	0.00	0.00	0.00
15	643	597	500	368	239	145	87.6	54.1	33.1	18.8	8.58	1.07	0.00	0.00	0.00	0.00	0.00	0.00
20	482	423	337	242	159	102	65.4	42.5	26.7	14.8	5.92	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	330	297	244	183	128	85.6	57.5	38.5	24.9	14.3	5.77	0.22	0.00	0.00	0.00	0.00	0.00	0.00
30	169	152	127	101	76.7	56.6	40.8	28.5	18.5	10.00	2.63	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	116	107	92.0	75.6	59.7	45.6	33.7	24.0	15.7	8.34	2.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	59.8	56.2	50.7	44.0	36.7	29.5	22.5	16.0	9.92	3.85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	42.6	40.5	37.1	32.7	27.7	22.5	17.1	11.9	6.79	2.52	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	24.7	23.7	22.0	19.5	16.7	13.3	9.61	5.73	1.63	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	16.1	15.5	14.2	12.5	10.4	7.84	5.18	3.26	1.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	7.26	6.78	5.89	4.69	3.14	1.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	3.64	3.46	3.05	2.48	1.74	0.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: