

LED Test Report

Product Mark

Product Type :SP-PZT-R135-6P-RDM

Manufacturer :TPK

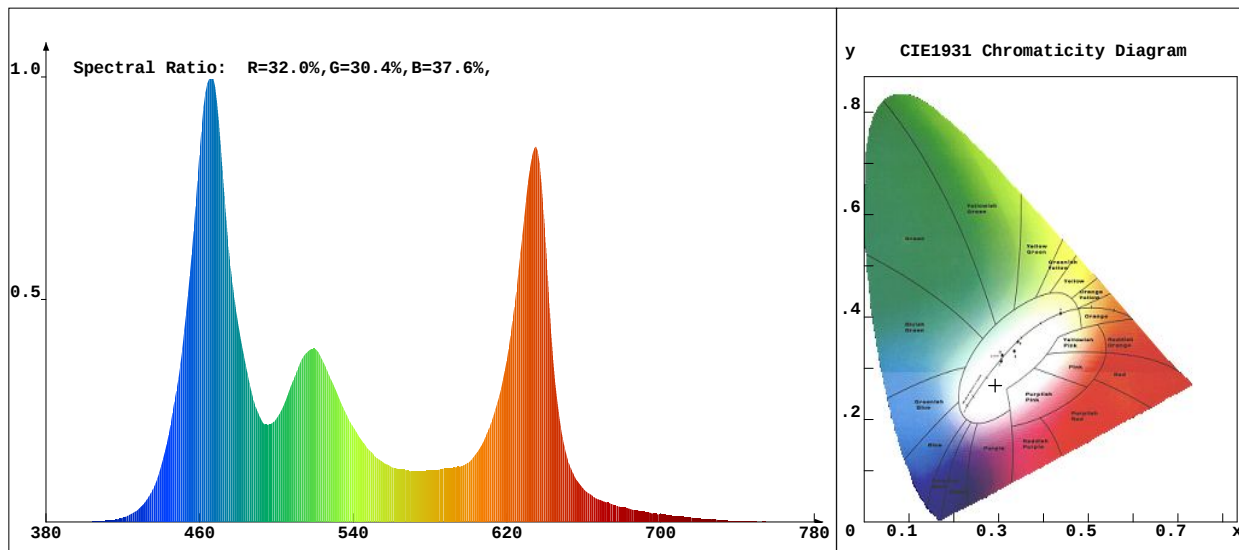
Temperature :22.5'C

Humidity :42%

Operator :qc1

Test Date :2025-07-31 16:33:51

Remark:8.03.035.0003 45° SP-PZT-R135-6P-RDM

**Chroma Parameters**

Chro.Coar.:x=0.2928 y=0.2668 u=0.2085 v=0.2851 duv=-0.0200

CCT: 9865K Dominant Wave.:458.2nm Purity:21.7%

Flux RGB Ratio:R=25.0%,G=65.6%,B=9.4% Peak Wave:466.7nm Half Width:24.5nm

Rendering Index:Ra= 37.9

R1 =16 R2 =45 R3 =79 R4 =35 R5 =32 R6 =42 R7 =62 R8 =-8

R9 =-206 R10=-19 R11=24 R12=35 R13=19 R14=85 R15=-2

Photo Parameters

Flux:1016.75lm

Effi.:34.9lm/W

Radiant:4313.9mW

Iv:0.0mcd

Efficiency:0.374

Effi Level:B (EU 874-2012)

Ele. Parameters

Voltage:U=277.200V

Current:I=0.1820A

Power:P=29.10W

Power Factor:PF=0.575

Instrument state

Instrument:Hopoo HP8000S

Integral Time: 43.566ms

VPeak: 13689

VDark: 1105

Scan Range: 380-780nm

Product ID: 201605038