

LED Test Report

Product Mark

Product Type :SP-PZT-R135-6P-RDM-B

Manufacturer :TPK

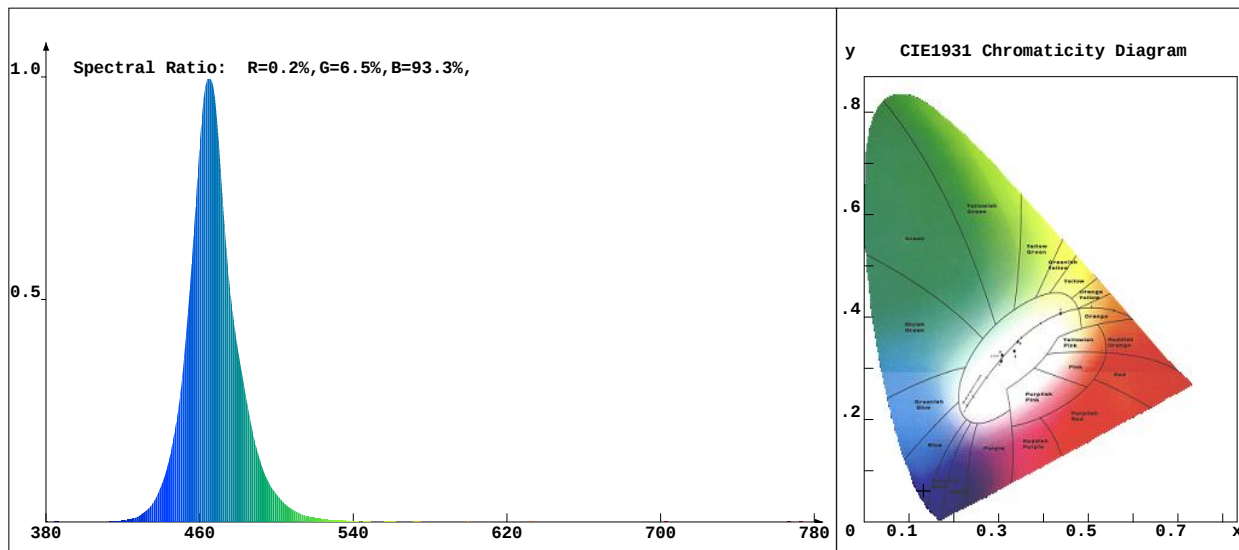
Temperature :22.5'C

Humidity :42%

Operator :qc1

Test Date :2025-07-31 16:36:06

Remark:8.03.035.0003 45° SP-PZT-R135-6P-RDM-B

**Chroma Parameters**

Chro.Coar.:x=0.1328 y=0.0607 u=0.1534 v=0.1052 duv=-0.0134

CCT:100000K Dominant Wave.:468.9nm Purity:97.2%

Flux RGB Ratio:R=0.3%, G=23.2%, B=76.5% Peak Wave:464.5nm Half Width:22.0nm

Rendering Index:Ra=-52.5

R1 =-13 R2 =-43 R3 =-132 R4 =-82 R5 =-7 R6 =-63 R7 =-47 R8 =-33

R9 =-282 R10=-232 R11=-114 R12=-111 R13=-31 R14=-28 R15=4

Photo Parameters

Flux:119.67lm

Effi.:13.0lm/W

Radiant:1649.5mW

Iv:0.0mcd

Efficiency:0.595

Effi Level:B (EU 874-2012)

Ele. Parameters

Voltage:U=277.400V

Current:I=0.0710A

Power:P=9.22W

Power Factor:PF=0.466

Instrument state

Instrument:Hopoo HP8000S

Integral Time: 41.010ms

VPeak: 13673

VDark: 1215

Scan Range: 380-780nm

Product ID: 201605038