

LED Test Report

Product Mark

Product Type :SP-PZT-R135-6P-RDM-G

Manufacturer :TPK

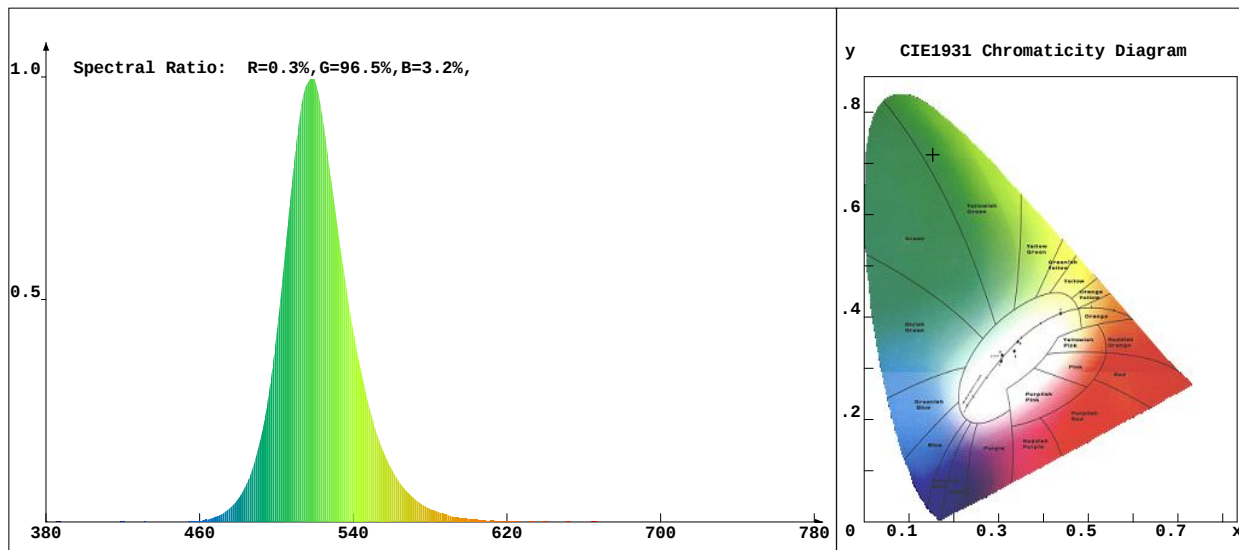
Temperature :22.5'C

Humidity :42%

Operator :qc1

Test Date :2025-07-31 16:35:24

Remark:8.03.035.0003 45° SP-PZT-R135-6P-RDM-G

**Chroma Parameters**

Chro.Coar.:x=0.1531 y=0.7172 u=0.0542 v=0.3808 duv=0.1613

CCT: 8231K Dominant Wave.:523.2nm Purity:77.1%

Flux RGB Ratio:R=0.2%,G=99.1%,B=0.7% Peak Wave:518.8nm Half Width:35.3nm

Rendering Index:Ra=-23.4

R1 =-33 R2 =-8 R3 =-23 R4 =-69 R5 =-12 R6 =-13 R7 =-1 R8 =-27

R9 =-358 R10=-103 R11=-96 R12=-27 R13=-40 R14=38 R15=-32

Photo Parameters

Flux:372.63lm

Effi.:39.9lm/W

Radiant:787.7mW

Iv:0.0mcd

Efficiency:0.265

Effi Level:B (EU 874-2012)

Ele. Parameters

Voltage:U=277.400V

Current:I=0.0720A

Power:P=9.33W

Power Factor:PF=0.467

Instrument state

Instrument:Hopoo HP8000S

Integral Time: 127.219ms

VPeak: 14857

VDark: 1291

Scan Range: 380-780nm

Product ID: 201605038