

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	1590.0 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	76.2V x 73.5H
	At 50% of Imax	45.9V x 44.0H
	At 90% of Imax	24.3V x 25.6H

Beam Flux	Total	999.2 lumens per klm.
	To 10% of Imax	885.0 lumens per klm.
	To 50% of Imax	571.7 lumens per klm.
	To 90% of Imax	216.4 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.1V I:0.2525A P:18.23W PF:0.5962 Freq:49.99Hz Lamp Flux:800.788x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070102
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

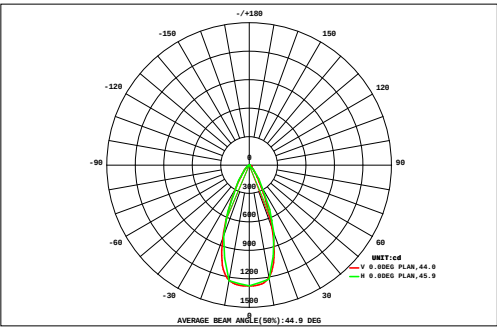

DATA OF LAMP		Eff:43.93lm/W	
MODEL SP-PZT-R110-3P-RDM	Imax(cd)	1273	
NOMINAL POWER(W)	18	AVAILABILITY(%)	88.5
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	709.0
NOMINAL FLUX(lm)	800.788	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	800.8
TEST VOLTAGE(V)	120	θ @50%(H,V)	44,46DEG


AREA FLUX DIAGRAM																	UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	72	0.00	0.00	0.00	0.00	0.01	0.01	0.02	0.05	0.08	0.09	0.08	0.05	0.02	0.01	0.01	0.00	0.00	0.00	0.44	0.00
	64	0.00	0.00	0.00	0.00	0.10	0.22	0.31	0.38	0.42	0.44	0.41	0.36	0.28	0.18	0.06	0.00	0.00	0.00	3.16	0.00
	56	0.00	0.00	0.01	0.11	0.27	0.45	0.59	0.72	0.80	0.81	0.76	0.66	0.54	0.38	0.22	0.07	0.00	0.00	6.39	0.00
	48	0.00	0.00	0.05	0.24	0.48	0.72	0.97	1.24	1.45	1.48	1.34	1.11	0.86	0.61	0.38	0.16	0.02	0.00	11.1	0.00
	40	0.00	0.01	0.14	0.39	0.71	1.10	1.62	2.28	2.93	3.01	2.54	1.92	1.34	0.86	0.52	0.25	0.06	0.00	19.7	6.64
	32	0.00	0.03	0.21	0.52	0.99	1.71	2.84	4.57	6.39	6.56	5.21	3.56	2.18	1.24	0.68	0.34	0.10	0.00	37.1	29.9
	24	0.00	0.05	0.25	0.64	1.36	2.79	5.60	10.1	14.4	14.9	11.7	7.34	3.71	1.74	0.86	0.40	0.13	0.01	76.0	70.8
		0.00	0.06	0.27	0.71	1.66	4.02	9.26	16.4	21.3	22.1	19.1	12.3	5.61	2.29	1.03	0.46	0.16	0.01	117	112
		0.00	0.07	0.29	0.74	1.84	4.82	11.8	20.6	24.9	25.3	23.0	15.4	6.88	2.65	1.12	0.47	0.16	0.02	140	136
		0.00	0.07	0.29	0.75	1.90	5.08	12.6	21.2	24.4	24.5	22.3	14.9	6.68	2.57	1.06	0.43	0.14	0.01	139	135
		0.00	0.05	0.24	0.61	1.54	4.04	9.82	17.8	22.3	22.7	19.2	12.2	5.72	2.31	0.95	0.38	0.12	0.01	120	116
	-24	0.00	0.02	0.18	0.46	1.04	2.51	5.55	9.90	13.8	14.7	11.5	7.08	3.68	1.70	0.74	0.31	0.09	0.00	73.3	68.4
-32	0.00	0.00	0.10	0.32	0.69	1.43	2.81	4.70	6.59	7.27	5.77	3.63	2.07	1.08	0.52	0.23	0.05	0.00	37.3	31.0	
-40	0.00	0.00	0.04	0.17	0.41	0.73	1.16	1.67	2.18	2.38	2.02	1.46	0.97	0.58	0.31	0.12	0.01	0.00	14.2	3.47	
-48	0.00	0.00	0.00	0.04	0.17	0.33	0.48	0.60	0.73	0.77	0.69	0.55	0.40	0.25	0.12	0.02	0.00	0.00	5.17	0.00	
-56	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.12	0.16	0.18	0.17	0.13	0.08	0.03	0.01	0.00	0.00	0.00	0.99	0.00	
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.03	0.03	0.03	0.02	0.01	0.00	0.00	0.00	0.00	0.17	0.00	
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)					16	24	32	40	48	56	64	72
Φ t	0.00	0.36	2.07	5.70	13.2	30.0	65.5	112	143	147	126	82.7	41.0	18.5	8.58	3.64	1.06	0.06	801	---	
Φ a	0.00	0.00	0.00	0.00	2.73	22.5	59.1	106	137	141	120	76.9	34.2	8.97	0.00	0.00	0.00	0.00	---	709	

one-half-peak spread: U:22.8,D:23.3 , L:20.2,R:20.0 NEMA Beam Type: Type 5

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2025-08-01
 V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.1V I:0.2525A P:18.23W PF:0.5962 Freq:49.99Hz Lamp Flux:800.788x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070102
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

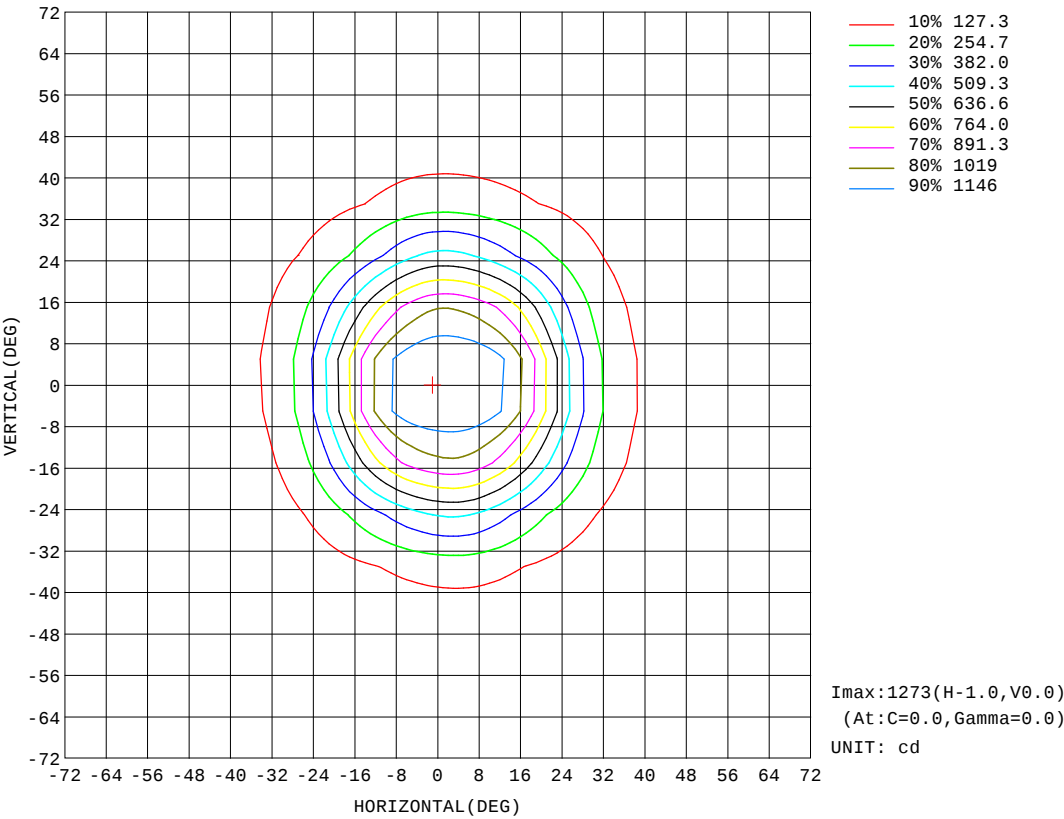


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.1V I:0.2525A P:18.23W PF:0.5962 Freq:49.99Hz Lamp Flux:800.788x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070102
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

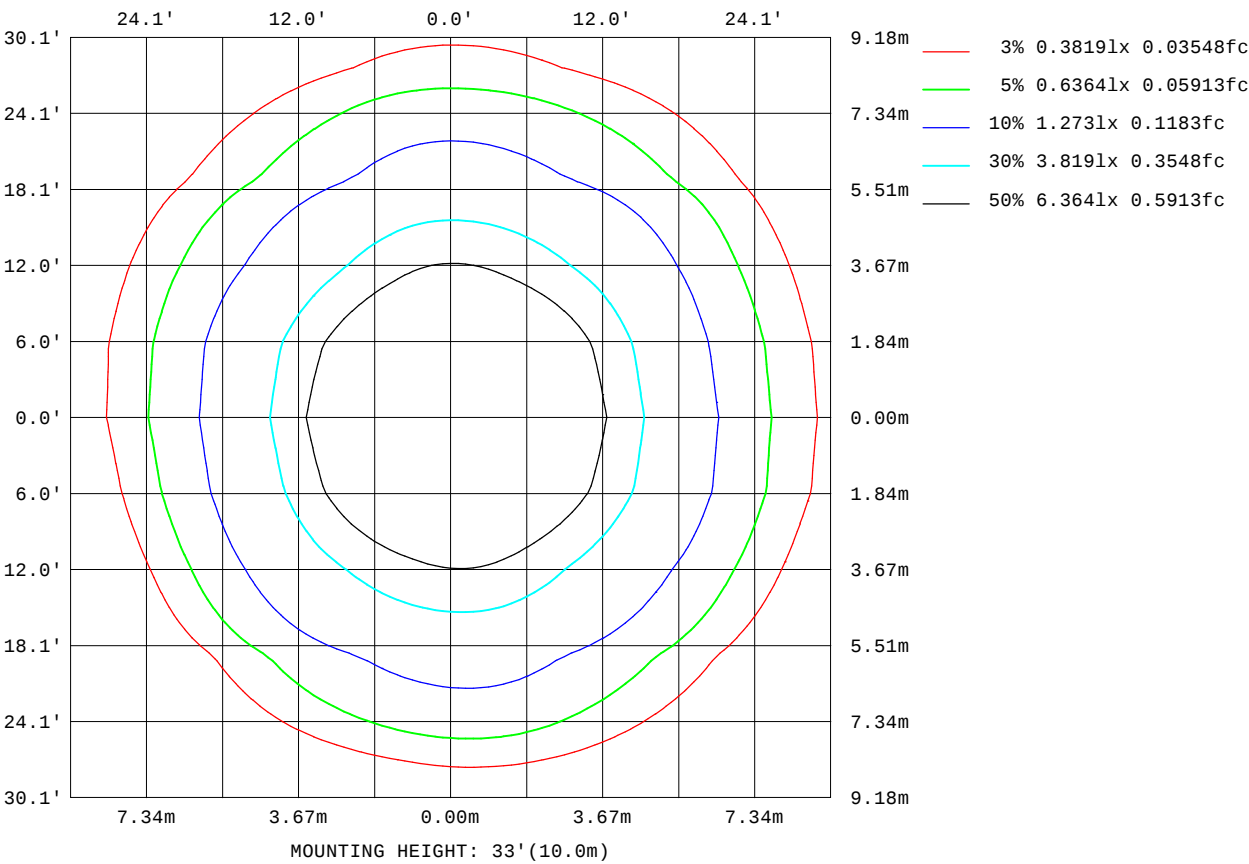

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

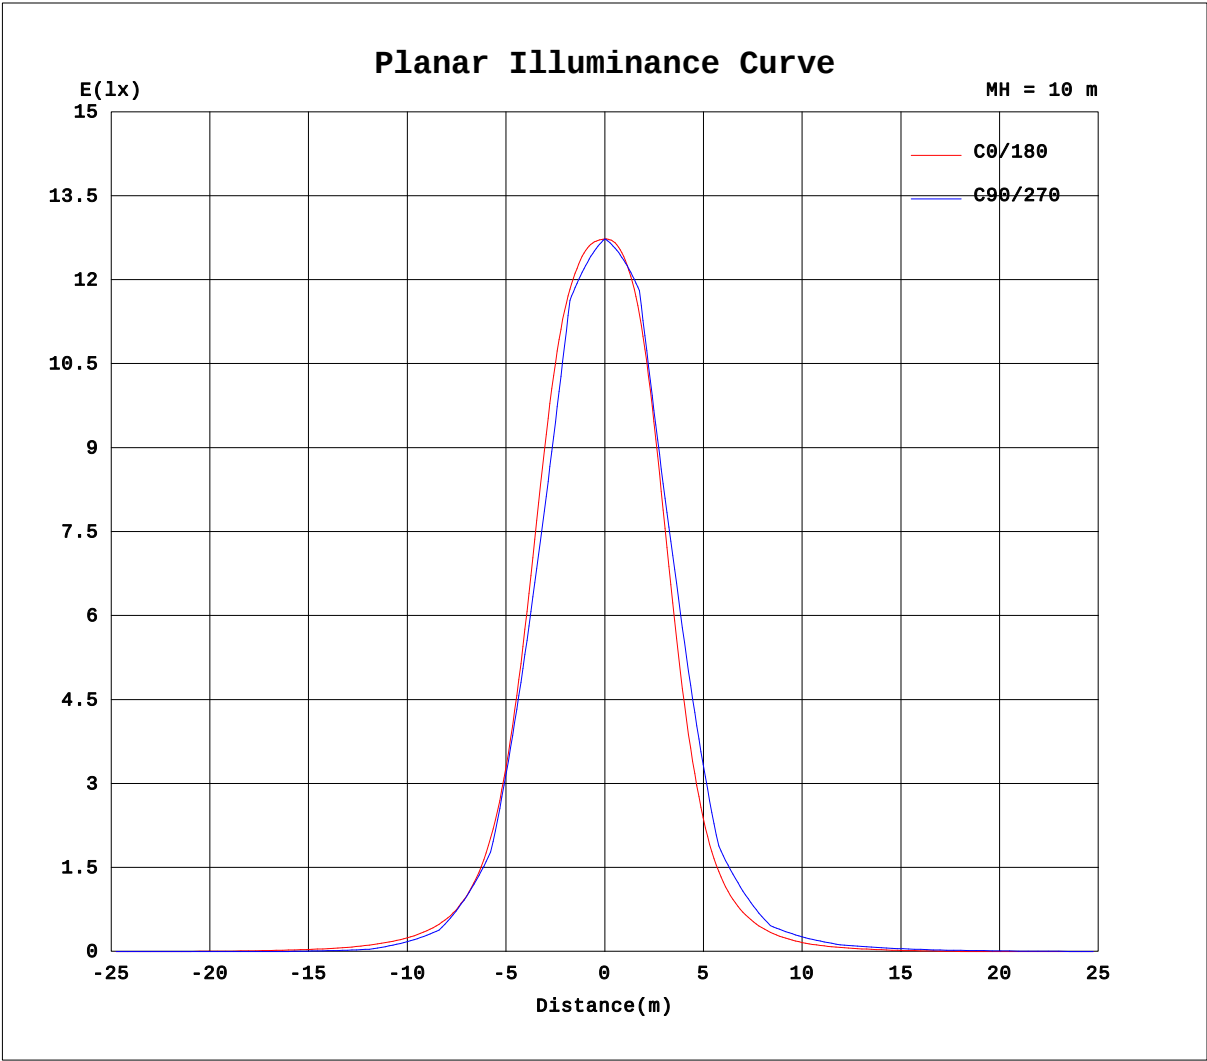


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.1V I:0.2525A P:18.23W PF:0.5962 Freq:49.99Hz Lamp Flux:800.788x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070102
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

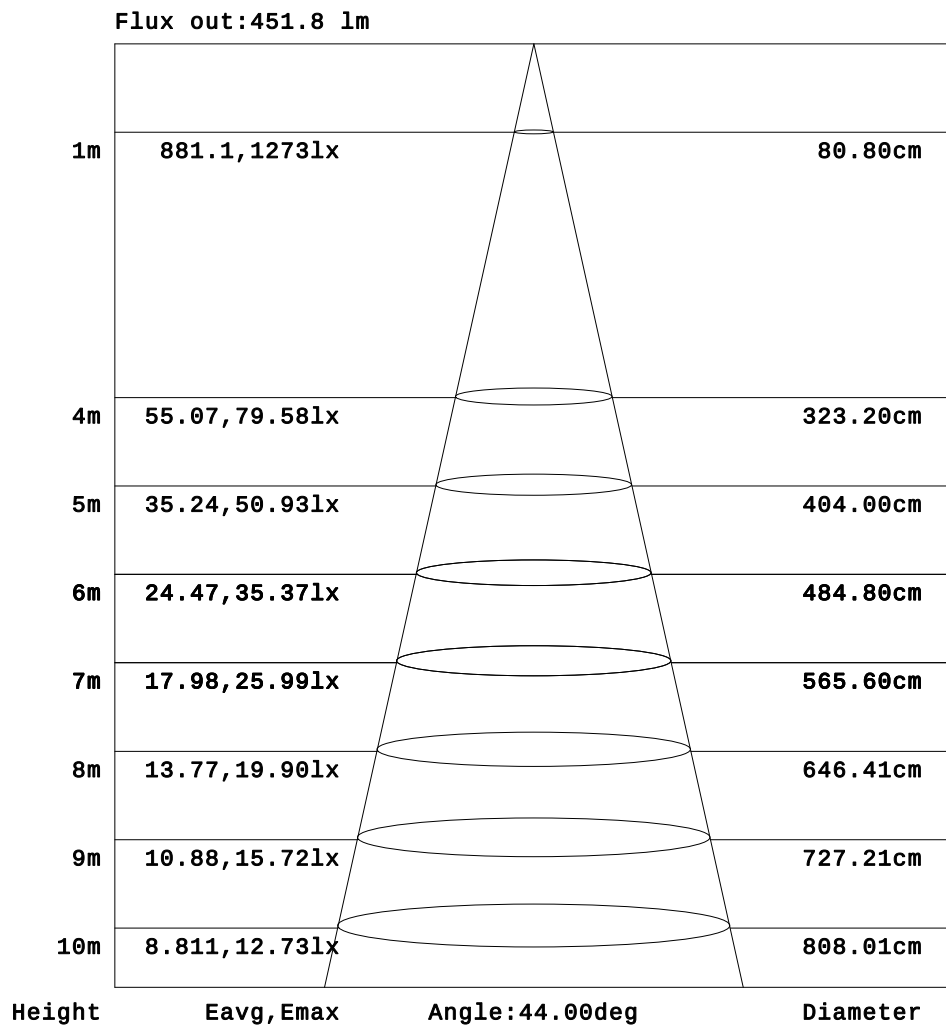

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.2525A P:18.23W PF:0.5962 Freq:49.99Hz Lamp Flux:800.788x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070102
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.51	2.21	3.74	5.19	6.49	7.49
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.72	5.05	8.07	10.9	13.4	15.3	16.5
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.76	5.42	9.32	14.0	20.3	26.5	32.8	39.3	45.7	50.6
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.96	12.4	20.3	28.8	37.9	47.5	57.2	67.7	78.4	86.0
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.43	4.68	10.7	19.2	29.5	42.5	59.9	82.0	108	135	160	179
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.51	11.1	19.7	29.9	43.4	62.4	89.8	126	169	213	251	275
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.19	4.64	13.5	23.3	35.9	54.8	86.0	136	208	297	385	465	516
-20	0.00	0.00	0.00	0.00	0.00	0.00	1.63	10.1	19.6	31.4	48.1	76.2	126	207	323	460	593	705	767
-15	0.00	0.00	0.00	0.00	0.00	0.00	1.98	10.5	20.5	33.1	52.5	85.5	146	249	411	616	804	929	988
-10	0.00	0.00	0.00	0.00	0.00	0.00	5.25	14.6	25.8	41.3	67.1	113	198	345	578	852	1079	1186	1220
-5	0.00	0.00	0.00	0.00	0.00	0.00	4.57	14.1	25.3	41.0	67.3	112	193	343	584	876	1110	1216	1245
0	0.00	0.00	0.00	0.00	0.00	0.00	7.45	17.7	29.9	49.2	81.4	135	235	422	706	1009	1203	1265	1273
5	0.00	0.00	0.00	0.00	0.00	0.00	5.47	15.5	27.2	44.5	72.7	118	201	353	594	878	1105	1215	1253
10	0.00	0.00	0.00	0.00	0.00	0.01	7.23	17.6	29.9	49.1	78.8	126	214	366	595	853	1068	1189	1236
15	0.00	0.00	0.00	0.00	0.00	0.00	4.59	14.3	25.7	41.8	65.7	101	161	261	416	610	802	944	1012
20	0.00	0.00	0.00	0.00	0.00	0.00	5.60	15.4	26.8	42.7	64.6	94.9	140	209	311	447	603	739	794
25	0.00	0.00	0.00	0.00	0.00	0.00	2.20	11.0	21.2	34.6	51.5	73.2	103	146	208	292	393	490	541
30	0.00	0.00	0.00	0.00	0.00	0.00	1.97	10.5	20.3	32.6	46.3	62.0	81.2	105	135	175	225	272	291
35	0.00	0.00	0.00	0.00	0.00	0.00	0.29	5.84	14.4	24.8	36.4	48.4	62.0	77.9	97.5	122	151	181	197
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.40	12.2	21.6	31.3	39.9	48.8	58.2	68.4	79.4	91.1	100	104
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.47	6.16	13.8	22.3	30.0	37.2	44.3	51.3	58.6	66.0	72.3	75.5
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.95	9.42	16.5	23.0	28.4	33.1	37.1	40.8	43.9	46.3	47.3
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.87	4.01	8.30	14.1	19.0	23.3	26.6	29.4	31.9	33.7	34.8
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.42	7.33	11.4	14.9	17.1	19.1	20.6	21.8	22.4
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.72	3.21	5.33	7.12	8.37	9.65	11.0	12.0	12.6
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.83	1.78	2.50	2.91
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.29	0.80	1.19	1.43
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2025-08-01

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.2525A P:18.23W PF:0.5962 Freq:49.99Hz Lamp Flux:800.788x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070102
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2 UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	8.30	8.00	7.30	6.21	4.87	3.36	1.70	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	16.5	15.8	14.2	11.9	9.15	6.07	2.73	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	51.7	48.8	42.7	35.7	28.8	22.6	16.6	11.1	7.23	3.67	0.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	86.3	79.7	68.5	56.7	45.9	36.6	28.2	20.4	13.0	5.87	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	182	165	137	109	84.0	63.1	46.4	33.0	22.7	14.2	6.31	1.80	0.00	0.00	0.00	0.00	0.00	0.00
-30	274	241	194	151	113	82.4	58.7	41.2	28.7	19.2	10.4	1.91	0.00	0.00	0.00	0.00	0.00	0.00
-25	519	460	367	273	194	134	89.8	59.7	39.6	26.0	15.9	6.75	0.50	0.00	0.00	0.00	0.00	0.00
-20	751	644	500	361	248	165	107	68.8	44.1	28.3	17.6	8.12	0.07	0.00	0.00	0.00	0.00	0.00
-15	987	906	757	565	381	238	146	90.8	57.4	36.1	22.5	12.1	2.87	0.00	0.00	0.00	0.00	0.00
-10	1205	1119	941	692	450	266	158	96.8	60.5	37.5	23.1	12.3	2.92	0.00	0.00	0.00	0.00	0.00
-5	1243	1193	1059	812	533	314	183	110	70.0	44.1	27.1	15.3	5.40	0.00	0.00	0.00	0.00	0.00
0	1270	1232	1094	818	516	297	172	104	67.3	42.5	25.9	14.1	4.14	0.00	0.00	0.00	0.00	0.00
5	1248	1205	1074	818	529	308	180	110	71.9	46.7	29.1	16.5	6.11	0.00	0.00	0.00	0.00	0.00
10	1216	1145	969	700	440	255	153	97.0	64.9	42.7	26.7	14.5	4.23	0.00	0.00	0.00	0.00	0.00
15	996	922	783	587	387	236	145	94.5	64.1	43.4	27.9	15.4	5.18	0.00	0.00	0.00	0.00	0.00
20	756	654	524	389	264	172	113	77.4	54.1	37.3	23.7	12.0	2.40	0.00	0.00	0.00	0.00	0.00
25	526	464	381	294	211	146	100	71.4	51.2	36.3	23.6	12.1	2.79	0.00	0.00	0.00	0.00	0.00
30	277	243	203	164	129	98.7	74.4	56.2	42.0	30.0	18.6	8.25	0.28	0.00	0.00	0.00	0.00	0.00
35	192	173	149	125	102	80.9	63.4	49.5	37.8	27.2	16.8	7.18	0.69	0.00	0.00	0.00	0.00	0.00
40	102	94.8	85.7	76.0	65.7	55.6	46.2	37.9	29.4	20.1	10.9	2.75	0.00	0.00	0.00	0.00	0.00	0.00
45	74.8	71.1	65.7	59.4	52.6	45.6	38.6	31.6	24.4	16.4	8.37	2.12	0.00	0.00	0.00	0.00	0.00	0.00
50	46.9	45.5	43.2	40.1	36.7	32.8	28.3	22.6	16.3	9.48	2.66	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	34.8	34.1	32.5	30.3	27.7	24.7	20.8	16.2	10.9	5.43	1.99	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	22.6	22.1	21.0	19.5	17.5	15.1	11.7	7.82	3.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	12.8	12.6	11.8	10.8	9.28	7.82	6.22	4.33	2.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	2.98	2.78	2.26	1.51	0.38	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	1.49	1.42	1.19	0.84	0.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: