


Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)		1771.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	73.0V x 69.1H
	At 50% of Imax	45.2V x 43.4H
	At 90% of Imax	24.5V x 25.5H
Beam Flux	Total	997.6 lumens per klm.
	To 10% of Imax	928.2 lumens per klm.
	To 50% of Imax	620.0 lumens per klm.
	To 90% of Imax	239.8 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.4V I:0.0810A P:5.215W PF:0.5303 Freq:50.00Hz Lamp Flux:264.81x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070099
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

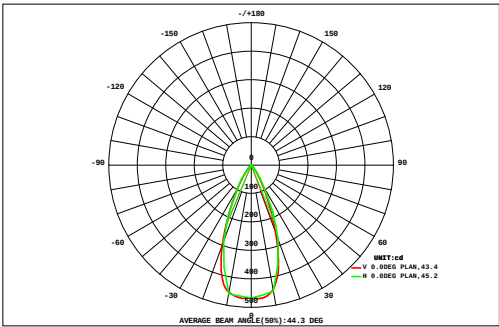

DATA OF LAMP		Eff:50.78lm/W	
MODE:SP-PZT-R110-3P-RDM-G		Imax(cd)	469.2
NOMINAL POWER(W)	5	AVAILABILITY(%)	93.3
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	247.1
NOMINAL FLUX(lm)	264.81	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	264.8
TEST VOLTAGE(V)	120	θ @50%(H,V)	43,45DEG


VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.05	0.06	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.20	0.00
40	0.00	0.00	0.00	0.00	0.00	0.04	0.10	0.18	0.26	0.28	0.23	0.15	0.08	0.03	0.00	0.00	0.00	0.00	1.34	0.00
32	0.00	0.00	0.00	0.00	0.04	0.17	0.35	0.59	0.83	0.87	0.69	0.47	0.26	0.10	0.01	0.00	0.00	0.00	4.38	1.51
24	0.00	0.00	0.00	0.01	0.15	0.40	0.80	1.44	2.15	2.21	1.70	1.09	0.58	0.25	0.06	0.00	0.00	0.00	10.8	8.83
16	0.00	0.00	0.00	0.05	0.30	0.82	1.85	3.49	5.13	5.35	4.12	2.52	1.16	0.44	0.13	0.01	0.00	0.00	25.4	24.0
8	0.00	0.00	0.00	0.07	0.41	1.28	3.25	5.92	7.80	8.13	6.97	4.39	1.90	0.65	0.19	0.02	0.00	0.00	41.0	39.9
0	0.00	0.00	0.00	0.09	0.48	1.58	4.22	7.58	9.22	9.38	8.49	5.59	2.40	0.79	0.23	0.02	0.00	0.00	50.1	49.0
-8	0.00	0.00	0.00	0.09	0.51	1.68	4.48	7.83	9.02	9.02	8.23	5.44	2.33	0.76	0.21	0.01	0.00	0.00	49.6	48.6
-16	0.00	0.00	0.00	0.04	0.37	1.29	3.48	6.55	8.22	8.38	7.11	4.39	1.97	0.67	0.17	0.01	0.00	0.00	42.6	41.7
-24	0.00	0.00	0.00	0.00	0.17	0.73	1.85	3.51	4.96	5.31	4.15	2.47	1.17	0.43	0.09	0.00	0.00	0.00	24.9	23.7
-32	0.00	0.00	0.00	0.00	0.04	0.30	0.82	1.54	2.25	2.50	1.96	1.15	0.56	0.19	0.02	0.00	0.00	0.00	11.3	9.71
-40	0.00	0.00	0.00	0.00	0.00	0.05	0.19	0.38	0.58	0.65	0.52	0.31	0.13	0.03	0.00	0.00	0.00	0.00	2.84	0.20
-48	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.09	0.11	0.08	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.38	0.00
-56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
Φ t	0.00	0.00	0.00	0.35	2.47	8.32	21.4	39.1	50.6	52.3	44.3	28.0	12.6	4.33	1.11	0.07	0.00	0.00	265	---
Φ a	0.00	0.00	0.00	0.00	0.25	6.48	20.0	37.8	49.3	50.9	43.1	26.8	10.9	1.68	0.00	0.00	0.00	0.00	---	247

one-half-peak spread: U:22.5,D:22.9 , L:17.8,NEW Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H(β) Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Temperature:28.0DEG	Humidity:83%
Operators:QC1	Test Distance:8.300m [K=1.0000]
Test Date:2025-08-01	Remarks:

ISOCANDELA DIAGRAM

Test:U:120.4V I:0.0810A P:5.215W PF:0.5303 Freq:50.00Hz Lamp Flux:264.81x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070099
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

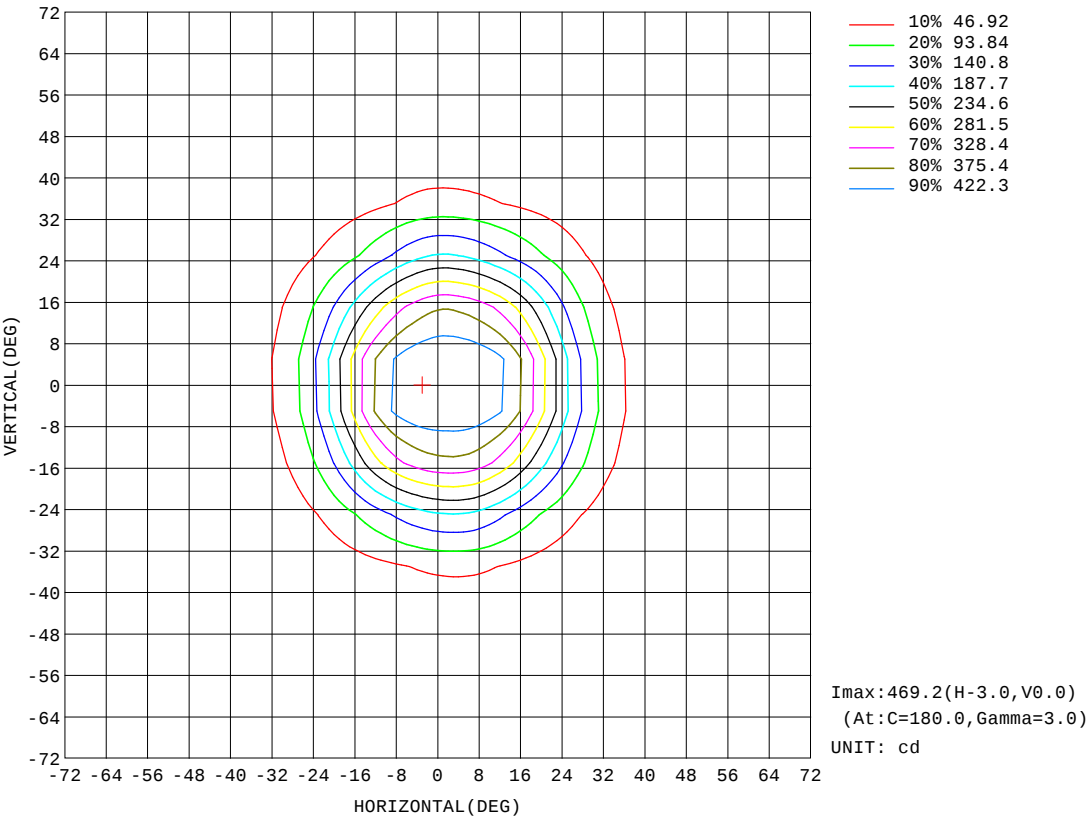


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.4V I:0.0810A P:5.215W PF:0.5303 Freq:50.00Hz Lamp Flux:264.81x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070099
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

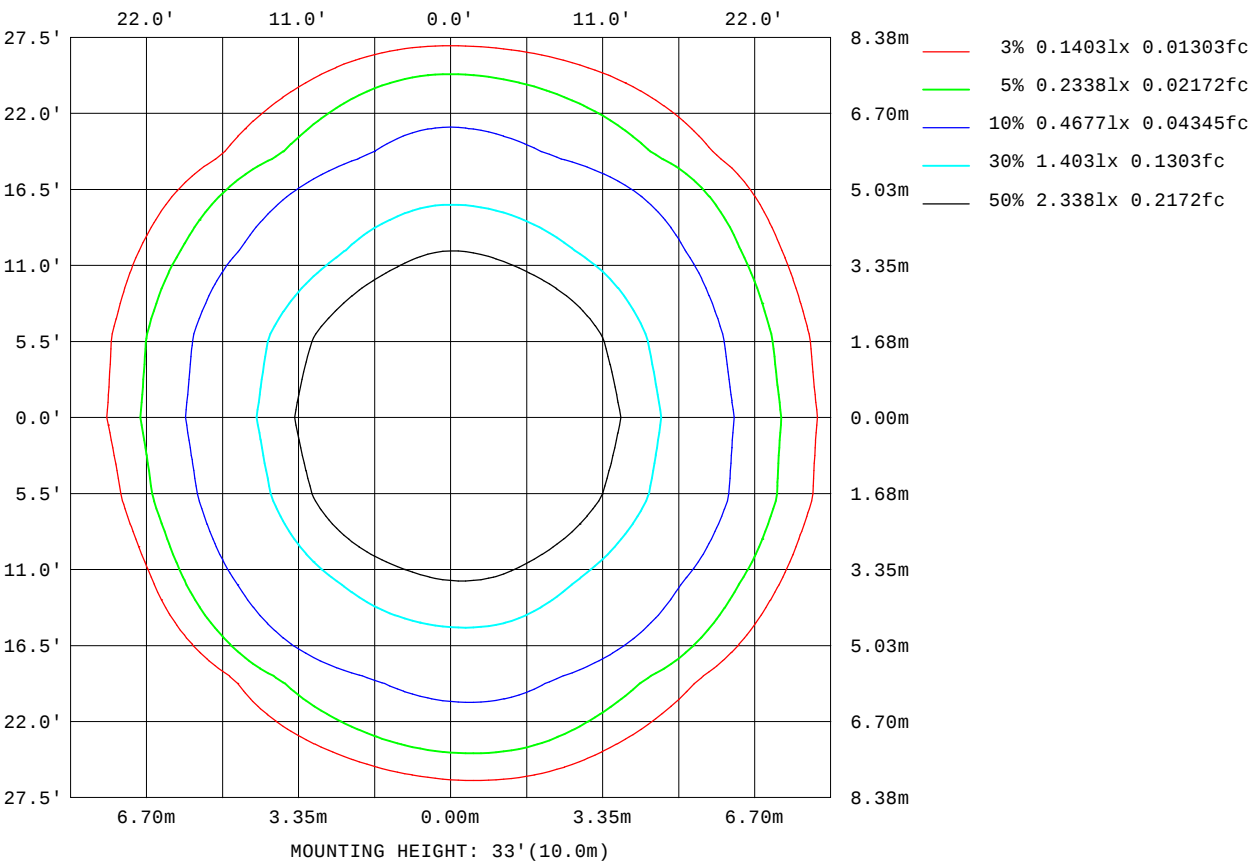

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

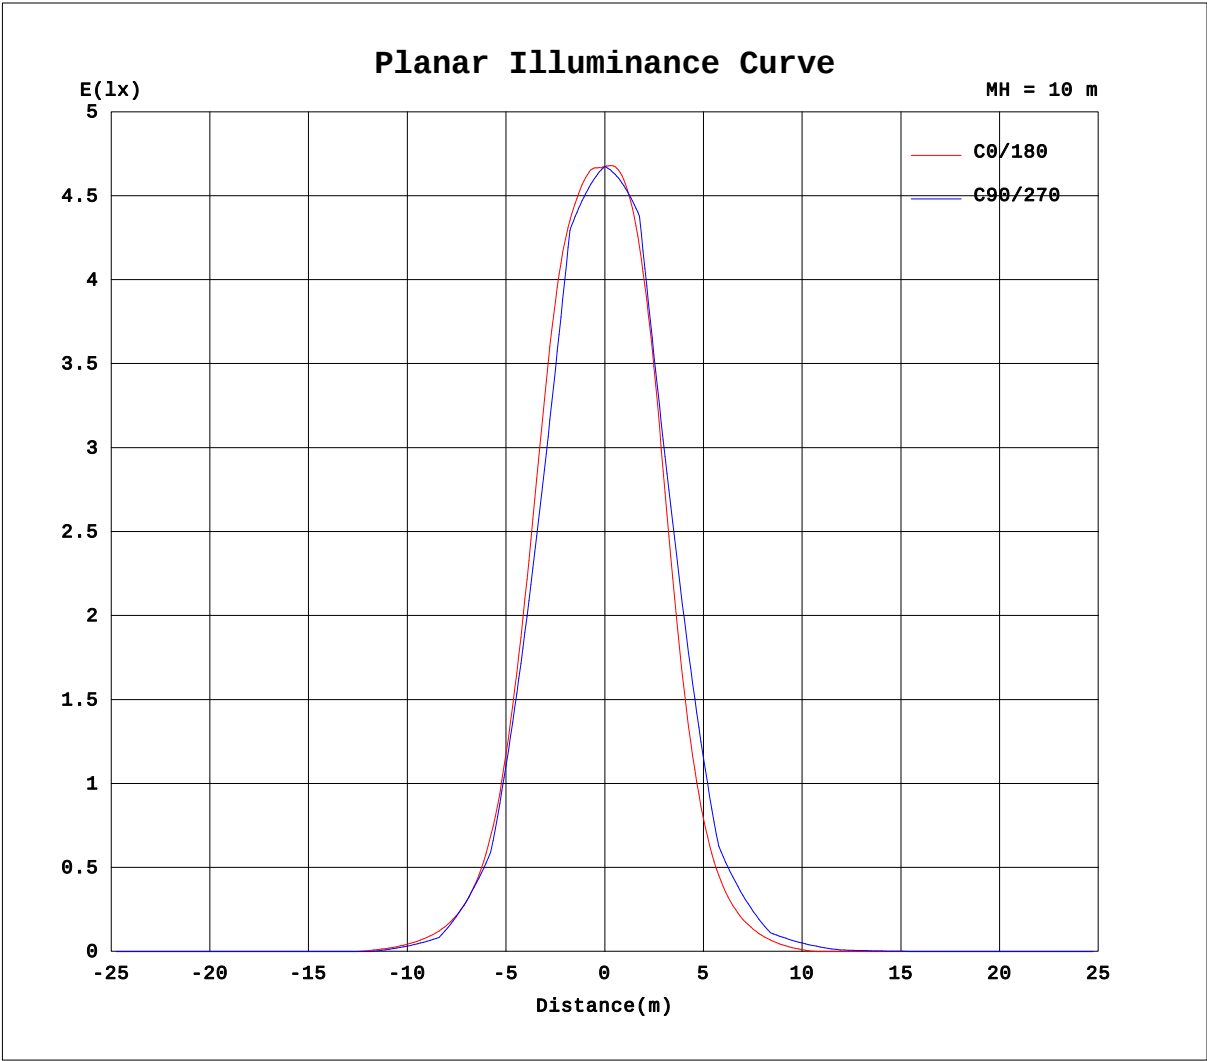


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.4V I:0.0810A P:5.215W PF:0.5303 Freq:50.00Hz Lamp Flux:264.81x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070099
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

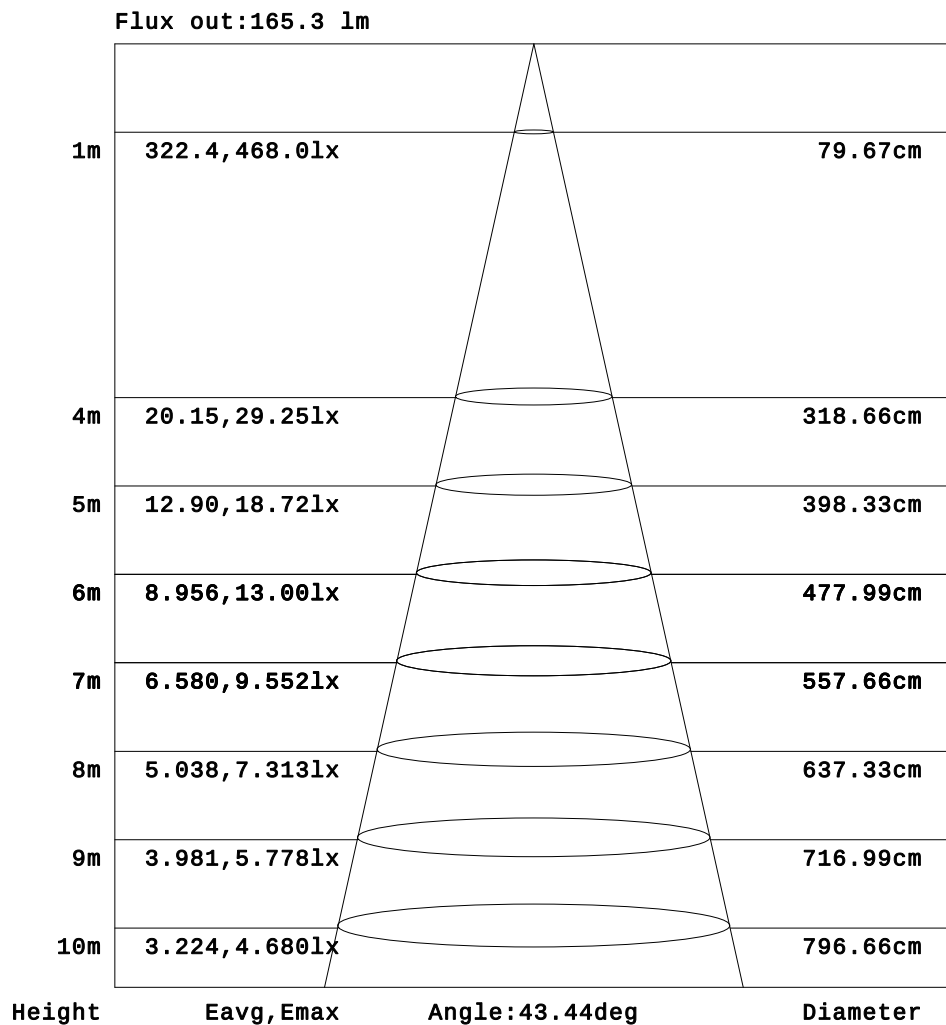

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.4V I:0.0810A P:5.215W PF:0.5303 Freq:50.00Hz Lamp Flux:264.81x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070099
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																		UNIT: cd	
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.28	3.12	5.24	7.60
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	3.29	7.02	11.4	16.0
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.29	3.51	8.59	17.2	27.3	37.7	47.8	54.6
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.68	8.67	19.7	35.1	51.7	68.1	82.9	91.6
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.98	6.08	18.5	38.0	65.4	99.1	134	164	182
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.42	14.5	35.0	65.7	108	161	213	254	276
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	5.34	18.4	41.7	80.6	142	221	294	340	362
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.06	11.2	29.7	61.1	116	206	313	400	438	450
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.29	11.4	28.9	59.5	115	206	320	410	450	459
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.38	17.1	37.7	75.2	144	251	371	444	468	467
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.54	13.7	31.1	62.0	119	210	319	405	448	462
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.43	16.0	33.9	66.5	124	212	309	390	437	459
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.67	10.9	24.3	46.8	84.6	144	216	288	341	371
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.07	10.5	21.9	39.2	65.3	103	153	211	262	285
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.34	5.49	13.6	25.0	41.2	64.2	95.1	133	169	190
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.47	9.33	16.4	25.1	36.7	51.3	70.2	88.9	96.8
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.19	4.28	9.30	15.1	22.5	31.5	42.8	54.5	60.9
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.13	4.36	7.82	11.6	15.8	20.3	23.9	25.3
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.25	1.86	3.55	5.42	8.09	10.9	13.4	14.6
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	1.51	2.68	3.57	3.90
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.63	1.23	1.71	1.95
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.4V I:0.0810A P:5.215W PF:0.5303 Freq:50.00Hz Lamp Flux:264.81x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070099
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	9.81	8.76	6.53	4.07	1.80	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	19.4	16.8	12.1	7.20	2.84	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	55.8	50.1	39.0	27.9	18.1	10.0	4.85	1.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	91.2	79.4	61.2	44.4	29.9	17.7	7.94	1.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	184	163	127	91.4	61.0	37.4	20.4	8.49	1.97	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	272	233	178	125	81.3	49.3	27.3	12.3	2.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	361	333	276	202	132	77.8	42.3	20.8	7.62	0.71	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	445	415	346	249	158	89.3	46.8	23.1	8.98	0.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	458	440	390	295	191	107	56.1	28.2	12.6	2.56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	467	454	403	298	186	99.5	51.2	25.7	11.6	2.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	460	444	394	297	189	104	54.2	27.8	13.3	3.66	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	449	422	354	251	154	83.4	43.8	22.7	10.6	2.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	364	335	282	208	133	75.6	41.0	21.7	10.3	2.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	271	231	183	134	86.0	50.7	28.5	15.2	6.51	0.38	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	184	160	129	97.3	66.1	41.1	23.9	13.0	5.44	0.67	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	90.5	77.4	62.6	48.0	34.8	23.4	14.1	7.21	1.99	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	58.7	51.4	42.3	33.1	24.5	16.7	9.95	4.76	1.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	24.4	21.8	18.3	14.6	10.8	7.01	3.46	0.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	14.3	12.9	10.8	8.44	5.90	3.88	2.07	0.54	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	3.77	3.22	2.32	1.25	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	1.92	1.69	1.26	0.74	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: