


Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)		1912.4 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	69.5V x 65.6H
	At 50% of Imax	44.4V x 42.7H
	At 90% of Imax	24.0V x 25.0H
Beam Flux	Total	995.6 lumens per klm.
	To 10% of Imax	942.8 lumens per klm.
	To 50% of Imax	646.5 lumens per klm.
	To 90% of Imax	244.4 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.6 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.5V I:0.0668A P:4.245W PF:0.5230 Freq:49.99Hz Lamp Flux:151.945x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070098
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

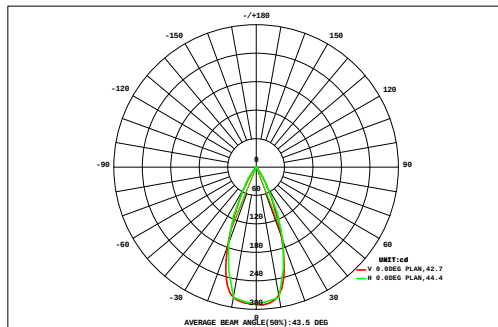

DATA OF LAMP		Eff:35.80lm/W	
MODE:SP-PZT-R110-3P-RDM-R		Imax(cd)	290.6
NOMINAL POWER(W)	4	AVAILABILITY(%)	95.3
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	144.8
NOMINAL FLUX(lm)	151.945	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	151.9
TEST VOLTAGE(V)	120	θ @50%(H,V)	43,44DEG

AREA FLUX DIAGRAM																	UNIT:lm	Φ t	Φ a
45	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.05	0.05	0.04	0.03	0.02	0.00	0.00	0.00	0.00	0.24	0.00
40	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.06	0.08	0.08	0.07	0.04	0.02	0.00	0.00	0.00	0.00	0.40	0.00
35	0.00	0.00	0.00	0.02	0.06	0.10	0.17	0.25	0.31	0.32	0.29	0.23	0.16	0.11	0.06	0.02	0.00	2.11	1.28
30	0.00	0.00	0.01	0.05	0.11	0.19	0.30	0.41	0.49	0.49	0.42	0.33	0.24	0.15	0.08	0.03	0.00	3.30	2.69
25	0.00	0.01	0.04	0.12	0.23	0.41	0.63	0.87	1.05	1.09	0.99	0.81	0.60	0.39	0.22	0.10	0.03	7.60	7.19
20	0.00	0.02	0.09	0.21	0.40	0.66	1.00	1.34	1.53	1.52	1.35	1.08	0.77	0.49	0.26	0.12	0.04	10.9	10.5
15	0.00	0.02	0.10	0.25	0.52	0.90	1.32	1.67	1.88	1.92	1.84	1.65	1.27	0.81	0.44	0.21	0.08	14.9	14.6
10	0.00	0.06	0.18	0.41	0.81	1.34	1.85	2.17	2.32	2.30	2.22	1.97	1.46	0.87	0.44	0.20	0.08	18.7	18.4
5	0.00	0.03	0.13	0.32	0.68	1.19	1.71	2.04	2.17	2.18	2.14	2.00	1.64	1.08	0.58	0.27	0.11	18.3	18.0
0	0.00	0.06	0.19	0.46	0.93	1.51	2.00	2.20	2.24	2.21	2.17	1.99	1.55	0.96	0.49	0.22	0.08	19.3	19.0
-5	0.00	0.01	0.10	0.26	0.58	1.05	1.56	1.95	2.11	2.14	2.07	1.87	1.49	1.00	0.55	0.26	0.11	17.2	16.9
-10	0.00	0.03	0.13	0.32	0.66	1.12	1.58	1.93	2.07	2.10	1.95	1.64	1.19	0.74	0.39	0.18	0.06	16.1	15.8
-15	0.00	0.00	0.04	0.14	0.32	0.60	0.91	1.21	1.41	1.49	1.39	1.17	0.88	0.58	0.33	0.16	0.06	10.7	10.4
-20	0.00	0.00	0.03	0.13	0.27	0.46	0.65	0.85	1.02	1.05	0.89	0.63	0.39	0.23	0.12	0.05	0.01	6.78	6.36
-25	0.00	0.00	0.00	0.03	0.09	0.20	0.32	0.44	0.54	0.60	0.57	0.46	0.33	0.20	0.11	0.04	0.01	3.95	3.44
-30	0.00	0.00	0.00	0.00	0.02	0.05	0.09	0.12	0.15	0.15	0.13	0.09	0.06	0.03	0.01	0.00	0.00	0.91	0.37
-35	0.00	0.00	0.00	0.00	0.01	0.02	0.04	0.07	0.10	0.11	0.11	0.08	0.05	0.03	0.02	0.00	0.00	0.66	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45 -40 -35 -30 -25 -20 -15 -10 HORIZONTAL(DEG) 10 15 20 25 30 35 40 45																			
Φ t	0.01	0.24	1.04	2.72	5.70	9.82	14.2	17.6	19.5	19.8	18.6	16.1	12.1	7.68	4.12	1.87	0.67	0.12	152
Φ a	0.00	0.00	0.21	2.14	5.32	9.42	13.8	17.3	19.2	19.5	18.3	15.8	11.8	7.19	3.67	1.11	0.00	0.00	145

one-half-peak spread: U:22.0,D:22.6 , L:17.8,R:25.1


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.5V I:0.0668A P:4.245W PF:0.5230 Freq:49.99Hz Lamp Flux:151.945x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070098
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

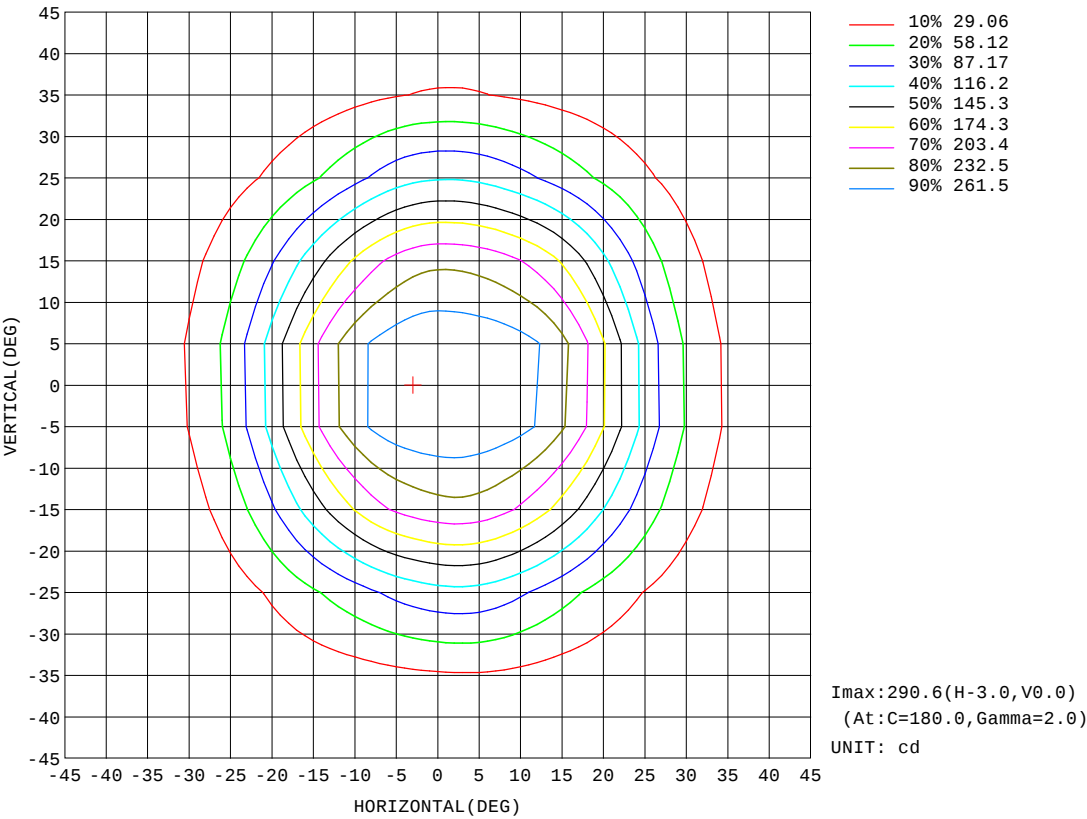


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.5V I:0.0668A P:4.245W PF:0.5230 Freq:49.99Hz Lamp Flux:151.945x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070098
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

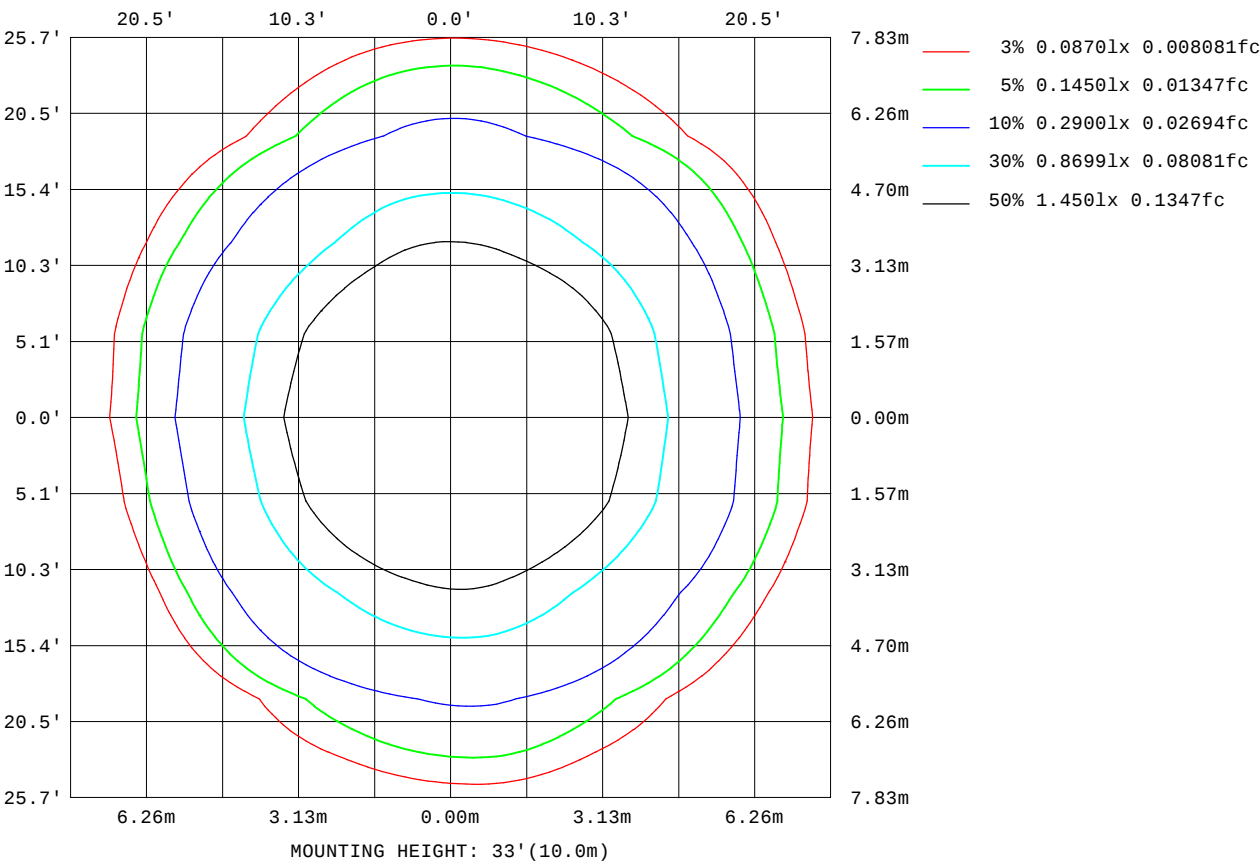

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

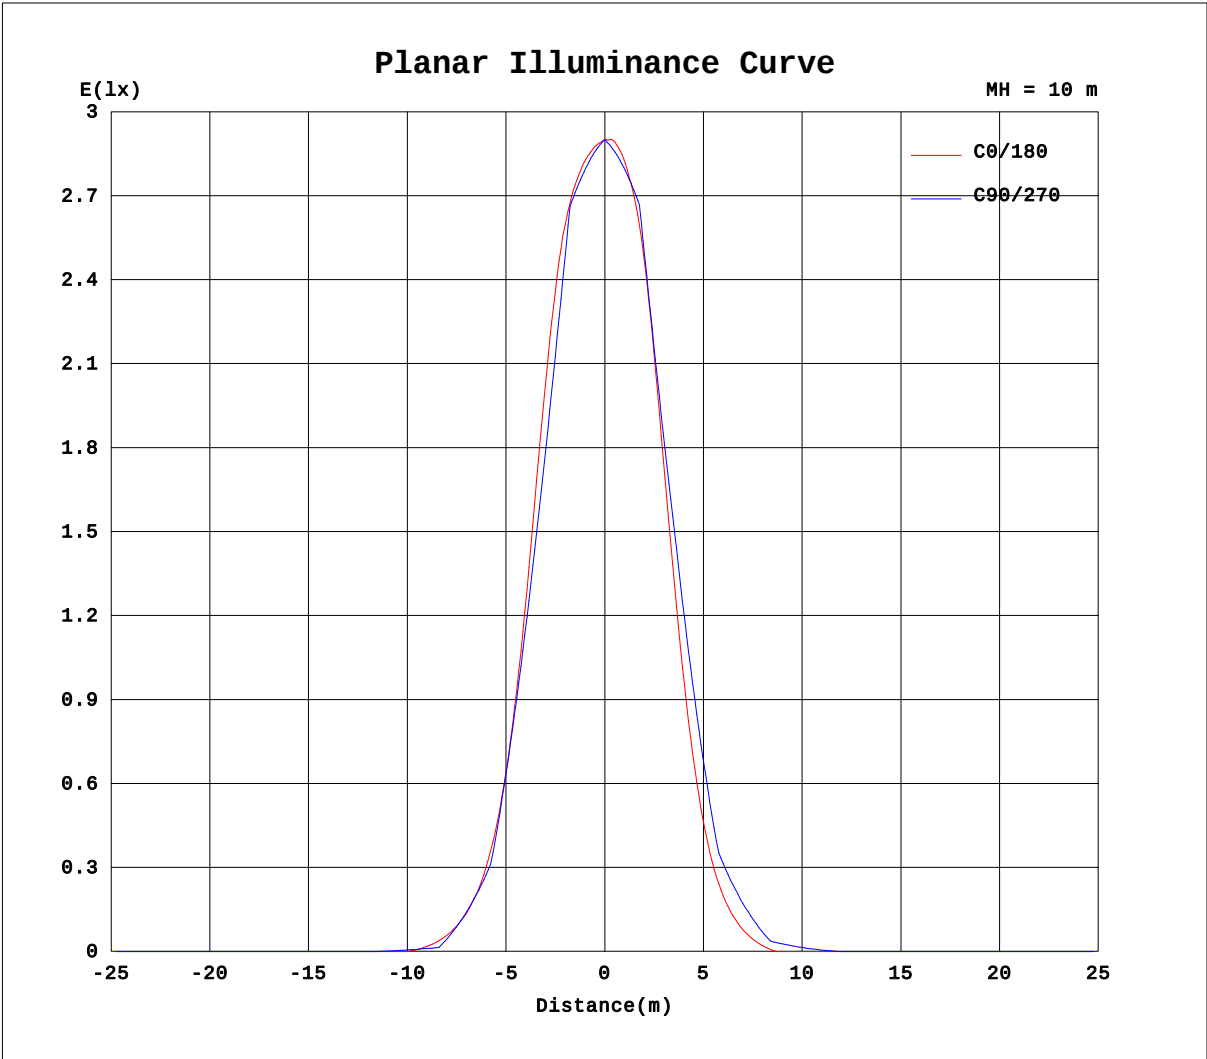


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.5V I:0.0668A P:4.245W PF:0.5230 Freq:49.99Hz Lamp Flux:151.945x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070098
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

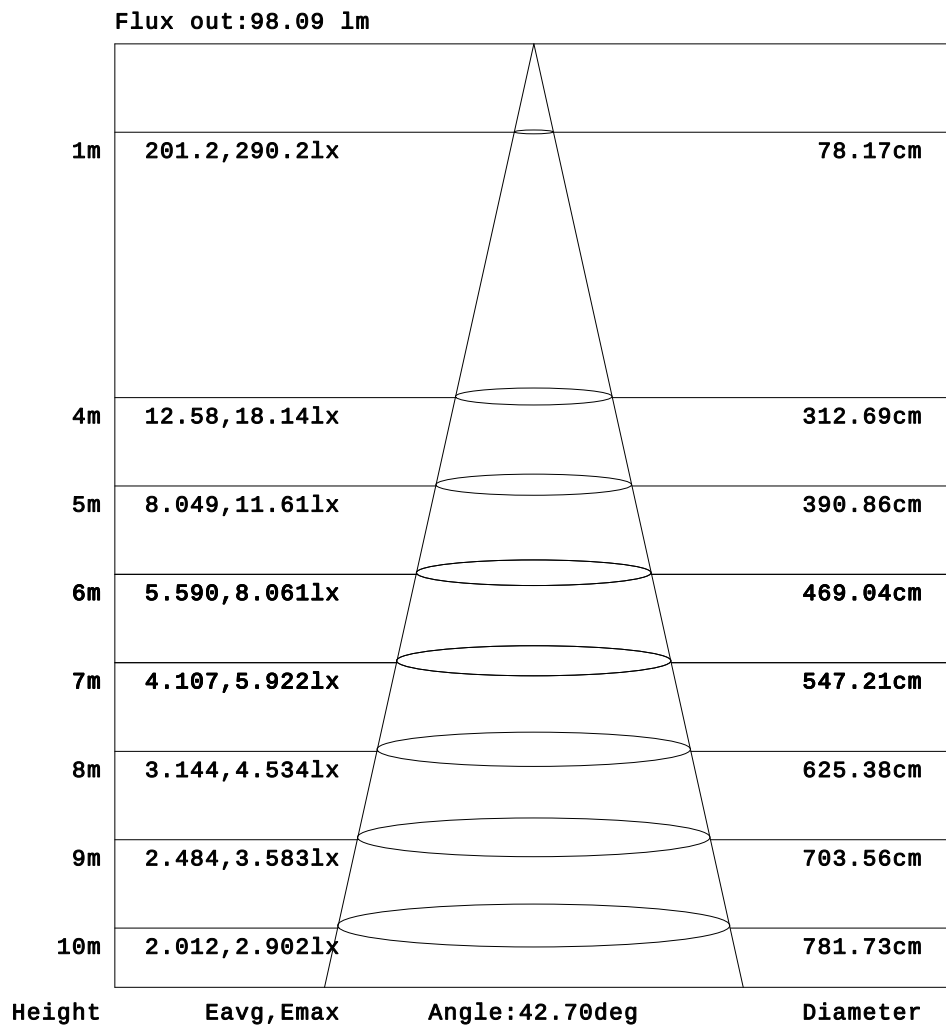

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.5V I:0.0668A P:4.245W PF:0.5230 Freq:49.99Hz Lamp Flux:151.945x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070098
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd			
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.83	1.69	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	2.07	3.59	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.92	5.93	10.8	16.0	21.6	25.6	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.26	13.7	23.8	34.0	43.2	48.4	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.22	5.26	16.2	33.5	54.6	75.4	94.6	106	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.76	13.4	33.1	61.5	93.8	125	152	167	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.12	18.2	43.5	83.5	131	176	207	222	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	10.6	31.0	67.6	124	187	242	270	279	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.46	10.3	30.2	67.2	126	195	250	277	284	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.83	16.0	40.8	87.1	156	228	274	289	290	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.77	11.8	32.0	69.5	128	196	251	276	285	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.16	13.7	34.7	72.1	128	190	242	270	279	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.31	7.59	22.1	46.9	85.0	132	178	212	226	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.11	17.4	34.8	60.0	92.7	131	163	173	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.18	8.21	19.0	34.5	54.8	79.4	103	114	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.73	8.64	16.3	26.1	38.3	49.6	54.4	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.86	3.66	7.30	12.9	20.2	27.4	31.3	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.42	5.25	7.49	8.48	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.92	2.35	3.57	4.21	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.5V I:0.0668A P:4.245W PF:0.5230 Freq:49.99Hz Lamp Flux:151.945x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070098
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	1.90	1.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	3.65	1.77	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	26.3	22.0	15.4	10.2	5.71	1.88	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	48.0	39.7	28.6	18.4	9.82	2.51	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	106	91.1	68.8	46.5	28.1	14.2	5.29	0.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	161	134	99.8	66.6	40.1	21.4	8.31	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	220	199	162	116	71.9	38.4	17.3	4.62	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	274	252	208	147	88.2	45.3	20.2	6.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	282	270	236	176	108	56.1	25.8	9.19	0.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	287	278	245	176	103	51.8	23.1	7.74	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	281	272	241	177	106	54.9	25.2	9.20	0.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	274	257	216	148	85.0	43.0	19.3	6.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	221	204	171	122	73.8	38.7	17.6	5.58	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	164	140	109	75.6	46.2	24.0	9.94	1.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	110	94.8	74.6	53.1	33.6	17.9	7.13	1.44	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	50.7	41.8	31.7	22.4	13.9	6.72	0.96	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	30.1	25.1	19.0	13.0	7.76	4.02	1.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	7.87	6.03	3.70	1.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	4.06	3.23	2.08	0.90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: