

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	1779.2 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	72.9V x 69.2H
	At 50% of Imax	44.9V x 43.3H
	At 90% of Imax	23.7V x 25.0H

Beam Flux	Total	998.0 lumens per klm.
	To 10% of Imax	924.4 lumens per klm.
	To 50% of Imax	613.6 lumens per klm.
	To 90% of Imax	227.8 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.4V I:0.0808A P:5.194W PF:0.5294 Freq:50.00Hz Lamp Flux:264.395x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070101
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

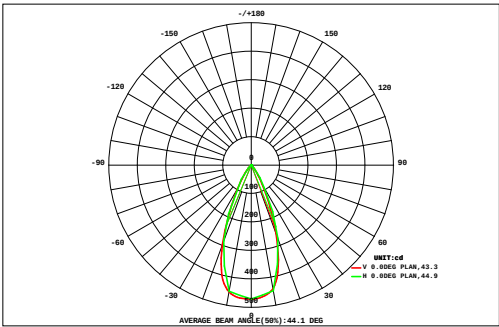

DATA OF LAMP		Eff:50.90lm/W	
MODE	SP-PZT-R110-3P-RDM-W	Imax(cd)	470.4
NOMINAL POWER(W)	5	AVAILABILITY(%)	92.9
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	245.7
NOMINAL FLUX(lm)	264.395	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	264.4
TEST VOLTAGE(V)	120	θ @50%(H,V)	43,45DEG

AREA FLUX DIAGRAM																		UNIT:lm	Φ t	Φ a
72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
48	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.06	0.06	0.05	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.25	0.00
40	0.00	0.00	0.00	0.00	0.01	0.05	0.11	0.20	0.28	0.29	0.24	0.16	0.08	0.03	0.00	0.00	0.00	0.00	1.46	0.00
32	0.00	0.00	0.00	0.00	0.05	0.19	0.37	0.62	0.85	0.88	0.72	0.49	0.28	0.11	0.02	0.00	0.00	0.00	4.58	1.61
24	0.00	0.00	0.00	0.02	0.17	0.43	0.84	1.49	2.16	2.23	1.73	1.11	0.60	0.26	0.07	0.00	0.00	0.00	11.1	9.06
16	0.00	0.00	0.00	0.06	0.31	0.83	1.88	3.56	5.19	5.33	4.13	2.50	1.17	0.46	0.14	0.01	0.00	0.00	25.6	24.2
8	0.00	0.00	0.00	0.09	0.42	1.29	3.27	5.98	7.78	8.04	6.94	4.36	1.87	0.66	0.21	0.02	0.00	0.00	40.9	39.8
0	0.00	0.00	0.00	0.10	0.49	1.59	4.25	7.58	9.15	9.31	8.45	5.55	2.35	0.79	0.24	0.03	0.00	0.00	49.9	48.8
-8	0.00	0.00	0.00	0.11	0.51	1.69	4.51	7.74	8.98	9.06	8.17	5.37	2.26	0.76	0.22	0.02	0.00	0.00	49.4	48.3
-16	0.00	0.00	0.00	0.06	0.37	1.28	3.49	6.44	8.15	8.33	6.97	4.30	1.90	0.66	0.18	0.01	0.00	0.00	42.1	41.1
-24	0.00	0.00	0.00	0.02	0.20	0.71	1.86	3.44	4.89	5.23	4.02	2.38	1.14	0.43	0.10	0.00	0.00	0.00	24.4	23.2
-32	0.00	0.00	0.00	0.00	0.07	0.33	0.82	1.51	2.21	2.47	1.89	1.11	0.55	0.21	0.04	0.00	0.00	0.00	11.2	9.40
-40	0.00	0.00	0.00	0.00	0.01	0.08	0.21	0.39	0.58	0.66	0.52	0.32	0.15	0.04	0.00	0.00	0.00	0.00	2.96	0.20
-48	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.06	0.10	0.11	0.09	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.46	0.00
-56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL(DEG)	16	24	32	40	48	56	64	72			
Φ t	0.00	0.00	0.00	0.46	2.62	8.47	21.6	39.0	50.4	52.0	43.9	27.7	12.4	4.41	1.22	0.10	0.00	0.00	264	---
Φ a	0.00	0.00	0.00	0.00	0.25	6.52	20.2	37.7	49.0	50.6	42.7	26.4	10.6	1.66	0.00	0.00	0.00	0.00	---	246


one-half-peak spread: U:22.3,D:22.8 , L:21.9, NEMA Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.4V I:0.0808A P:5.194W PF:0.5294 Freq:50.00Hz Lamp Flux:264.395x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070101
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

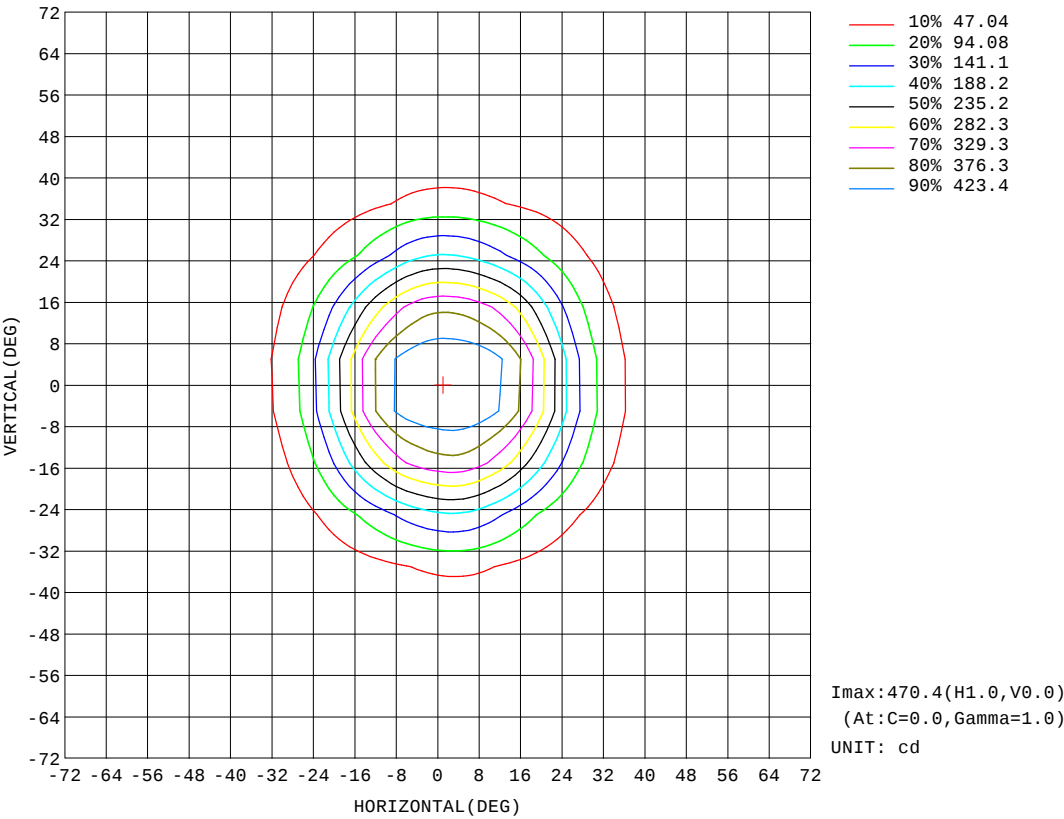


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.4V I:0.0808A P:5.194W PF:0.5294 Freq:50.00Hz Lamp Flux:264.395x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070101
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

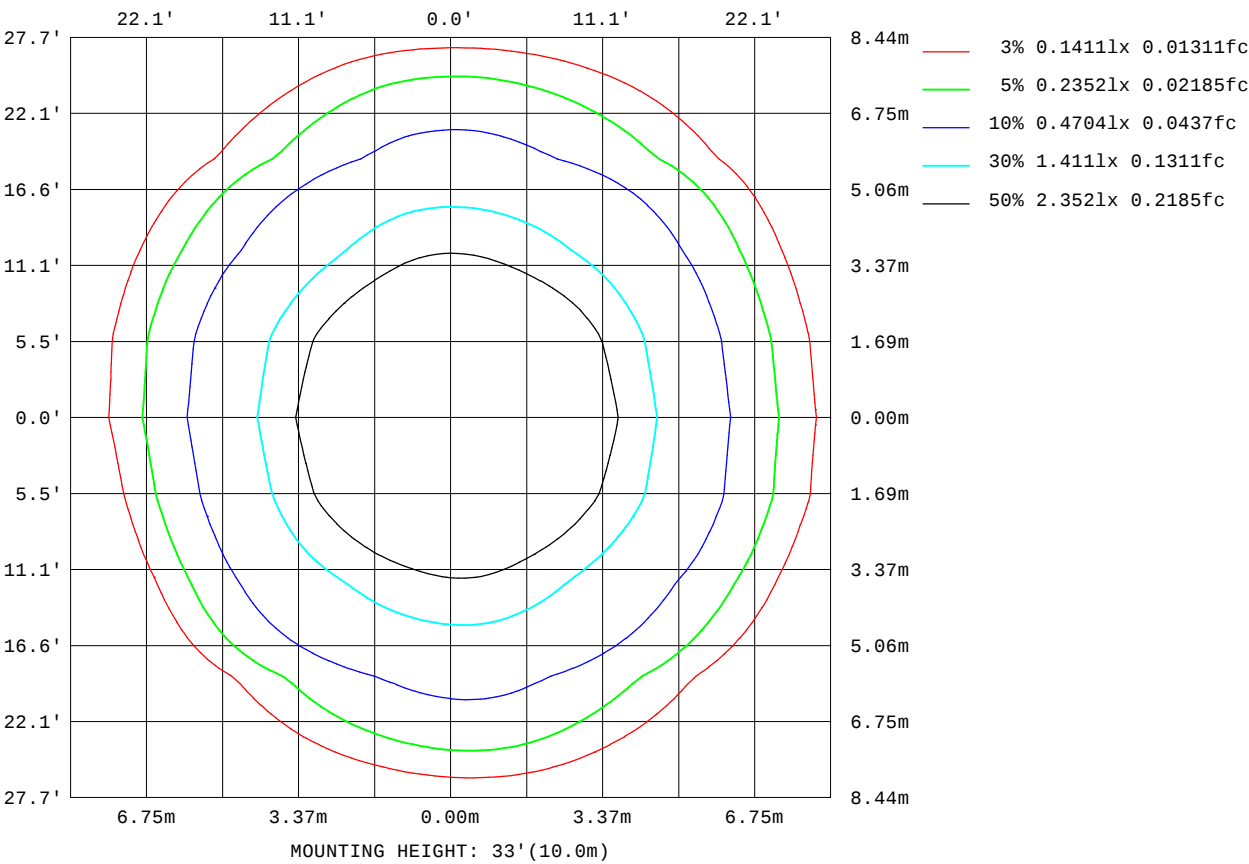

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

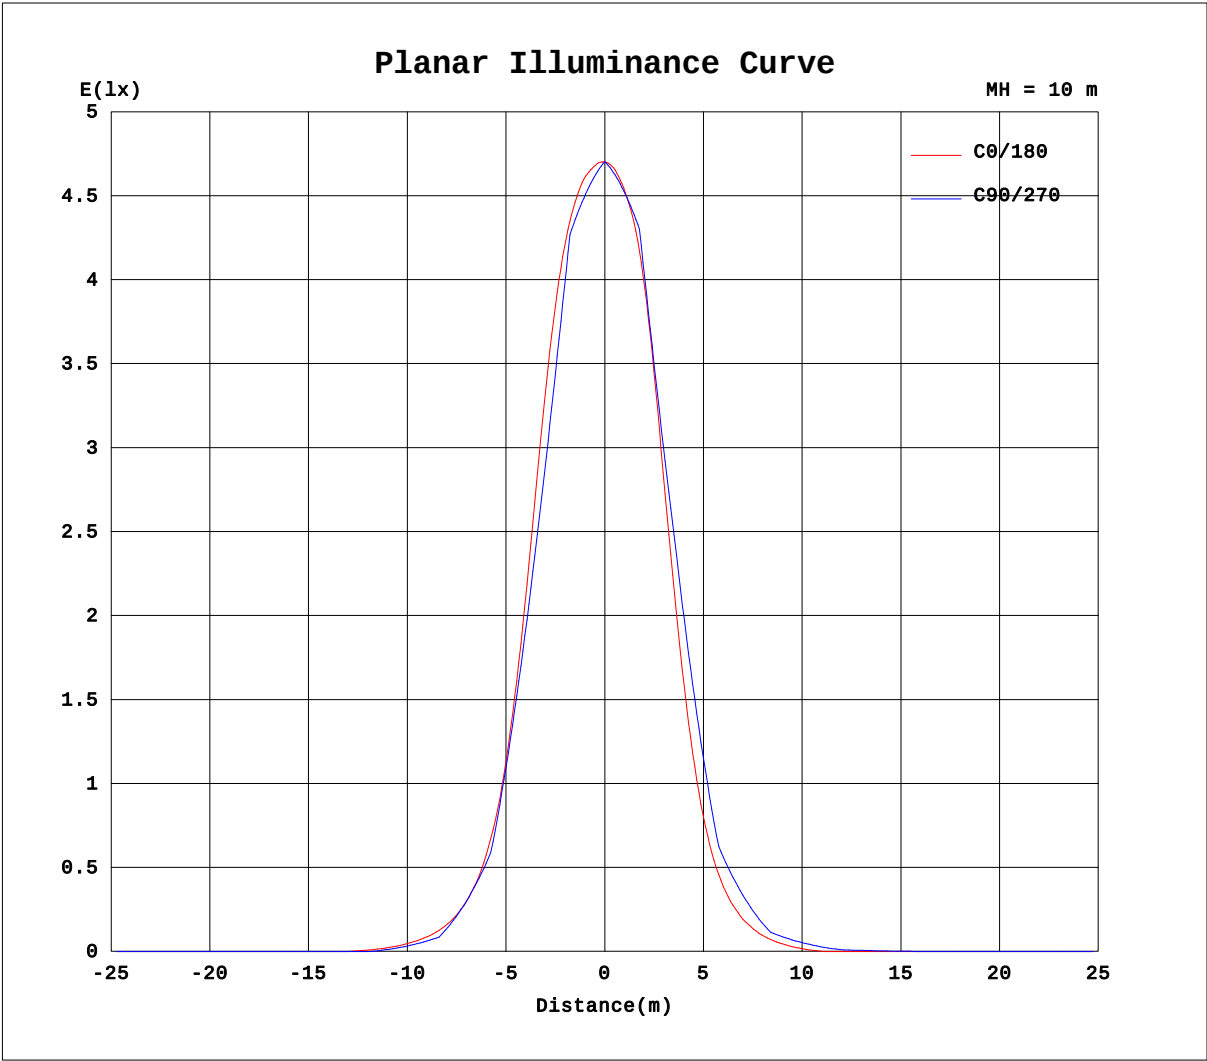


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.4V I:0.0808A P:5.194W PF:0.5294 Freq:50.00Hz Lamp Flux:264.395x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070101
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

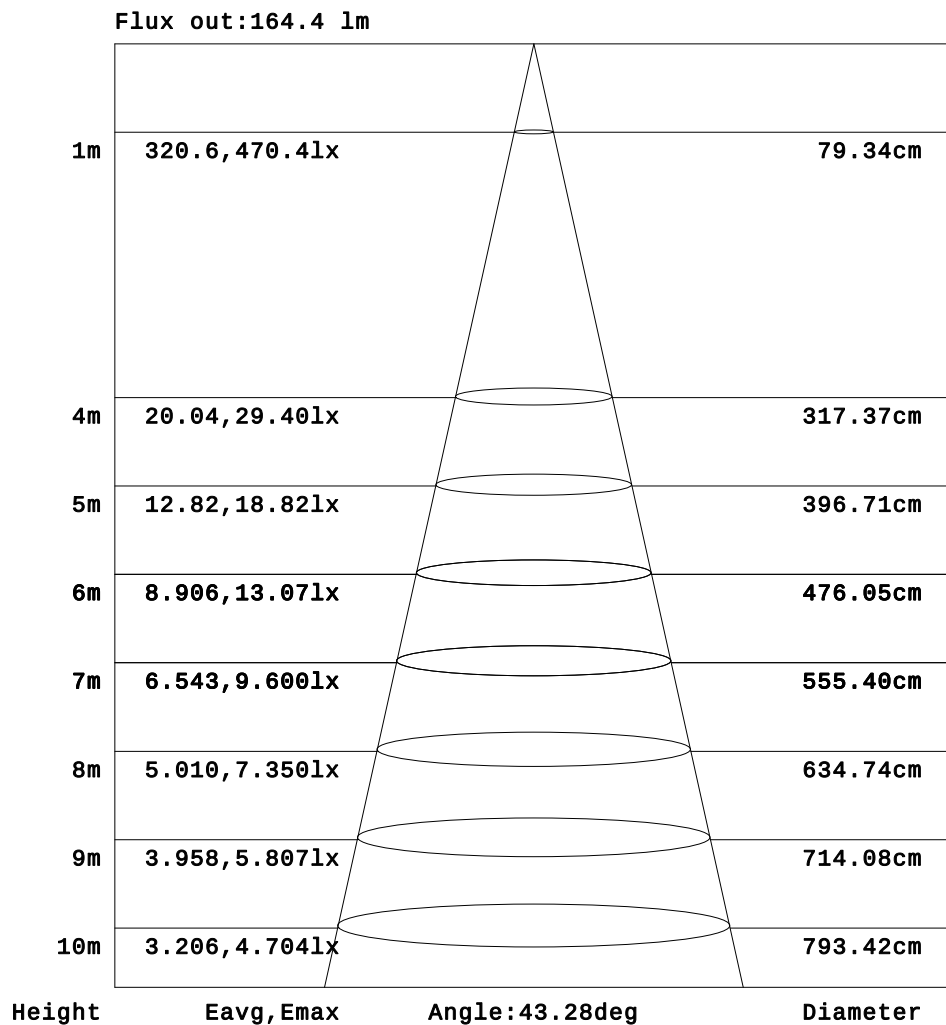

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.4V I:0.0808A P:5.194W PF:0.5294 Freq:50.00Hz Lamp Flux:264.395x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070101
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd			
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.70	2.57	4.44	6.30	8.17	9.62	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.13	5.91	9.60	13.4	17.0	19.5	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.55	5.02	10.4	18.4	27.8	38.1	47.6	54.5	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.33	11.7	21.6	34.3	50.1	66.9	81.6	91.1	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.25	8.51	19.9	38.4	65.5	97.9	131	161	180	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.05	16.4	34.0	64.8	109	159	208	250	274	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.93	7.50	19.6	41.1	80.0	143	219	288	337	359	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.31	12.8	29.3	60.5	116	207	309	394	435	448	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.04	12.7	29.1	59.4	116	208	318	405	446	458	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.00	17.8	38.0	75.9	146	254	368	441	464	470	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.15	14.5	31.6	62.6	120	212	320	405	445	460	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.75	16.8	34.8	67.2	124	213	312	393	436	451	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.96	11.8	25.3	47.5	85.2	145	219	291	344	367	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.19	11.4	22.9	40.1	66.0	105	156	214	266	285	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.92	6.43	14.7	26.2	42.4	65.9	97.4	136	173	190	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.40	10.5	17.9	26.9	38.6	53.7	72.4	89.8	96.6	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.64	5.20	10.5	16.6	24.0	33.2	44.5	55.6	61.0	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.88	5.35	8.95	12.8	17.0	21.3	24.6	26.0	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.62	2.32	4.10	6.21	8.97	11.8	14.1	15.2	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.69	2.09	3.28	4.18	4.53	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.21	0.92	1.53	2.02	2.26	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.4V I:0.0808A P:5.194W PF:0.5294 Freq:50.00Hz Lamp Flux:264.395x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070101
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	9.89	8.92	7.03	4.98	2.95	1.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	19.6	17.2	13.3	9.16	5.14	1.53	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	55.7	49.1	38.5	28.2	18.8	11.1	5.55	2.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	90.3	77.2	59.4	43.3	29.3	18.0	9.60	3.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	181	158	123	88.0	58.8	36.7	20.9	9.83	2.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	267	226	172	120	78.3	48.2	27.0	13.0	4.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	359	326	270	197	128	75.3	41.5	21.2	8.85	1.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	442	407	340	245	153	86.0	46.0	23.4	9.89	1.39	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	458	437	386	292	186	104	55.3	28.7	13.4	3.77	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	468	453	400	296	180	97.2	51.2	26.6	12.4	3.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	458	442	393	295	185	102	54.5	28.7	14.2	4.65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	445	418	355	249	151	83.0	44.8	23.7	11.5	3.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	361	334	283	207	131	75.6	42.0	22.8	11.3	3.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	270	232	184	132	85.6	51.6	29.8	16.4	7.45	0.93	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	185	162	130	97.2	66.1	41.9	25.1	14.1	6.34	1.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	92.0	79.4	64.0	49.2	35.8	24.4	15.2	8.20	2.71	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	59.7	52.8	43.6	34.3	25.4	17.6	10.9	5.57	1.85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	25.3	22.8	19.4	15.7	11.8	7.85	4.28	1.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	15.0	13.7	11.6	9.25	6.64	4.31	2.48	0.83	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	4.39	3.86	2.96	1.77	0.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	2.22	2.00	1.58	1.02	0.36	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: