


Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)		1776.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	72.8V x 68.9H
	At 50% of Imax	45.2V x 43.4H
	At 90% of Imax	24.6V x 25.6H
Beam Flux	Total	997.6 lumens per klm.
	To 10% of Imax	928.8 lumens per klm.
	To 50% of Imax	621.5 lumens per klm.
	To 90% of Imax	241.9 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.2V I:0.0469A P:6.333W PF:0.4872 Freq:50.00Hz Lamp Flux:262.166x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070105
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

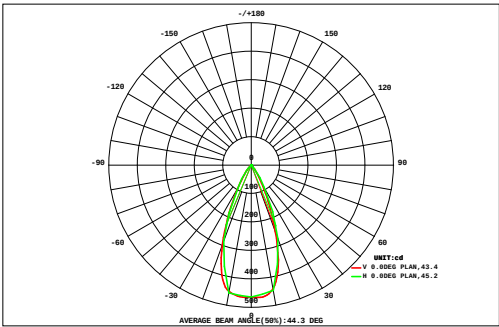

DATA OF LAMP		Eff:41.39lm/W	
MODE	SP-PZT-R110-3P-RDM-G	Imax(cd)	465.8
NOMINAL POWER(W)	6	AVAILABILITY(%)	93.4
RATED VOLTAGE(V)	277	Avai. FLUX(lm)	244.8
NOMINAL FLUX(lm)	262.166	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	262.2
TEST VOLTAGE(V)	277	θ @50%(H,V)	43,45DEG

AREA FLUX DIAGRAM																	UNIT:lm	Φ t	Φ a
72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.05	0.05	0.04	0.01	0.00	0.00	0.00	0.00	0.00	0.18	0.00
40	0.00	0.00	0.00	0.00	0.00	0.04	0.09	0.18	0.25	0.27	0.22	0.14	0.07	0.02	0.00	0.00	0.00	1.28	0.00
32	0.00	0.00	0.00	0.00	0.04	0.16	0.34	0.58	0.82	0.85	0.68	0.46	0.25	0.09	0.01	0.00	0.00	4.27	1.47
24	0.00	0.00	0.00	0.01	0.15	0.39	0.79	1.42	2.12	2.18	1.67	1.07	0.57	0.24	0.05	0.00	0.00	10.7	8.66
16	0.00	0.00	0.00	0.05	0.29	0.81	1.83	3.46	5.09	5.31	4.08	2.49	1.14	0.43	0.12	0.00	0.00	25.1	23.8
8	0.00	0.00	0.00	0.07	0.40	1.26	3.22	5.88	7.75	8.08	6.92	4.34	1.87	0.63	0.19	0.02	0.00	40.6	39.5
0	0.00	0.00	0.00	0.08	0.47	1.55	4.18	7.53	9.16	9.31	8.43	5.55	2.37	0.77	0.22	0.02	0.00	49.7	48.6
-8	0.00	0.00	0.00	0.08	0.49	1.65	4.44	7.78	8.96	8.96	8.18	5.40	2.31	0.75	0.20	0.01	0.00	49.2	48.2
-16	0.00	0.00	0.00	0.03	0.36	1.27	3.45	6.51	8.17	8.33	7.06	4.36	1.94	0.66	0.16	0.01	0.00	42.3	41.3
-24	0.00	0.00	0.00	0.00	0.16	0.72	1.82	3.47	4.93	5.28	4.12	2.44	1.16	0.43	0.08	0.00	0.00	24.6	23.5
-32	0.00	0.00	0.00	0.00	0.04	0.29	0.80	1.51	2.22	2.47	1.93	1.13	0.55	0.18	0.02	0.00	0.00	11.2	9.56
-40	0.00	0.00	0.00	0.00	0.00	0.04	0.18	0.36	0.56	0.63	0.51	0.29	0.12	0.03	0.00	0.00	0.00	2.74	0.20
-48	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.08	0.11	0.08	0.03	0.00	0.00	0.00	0.00	0.00	0.36	0.00
-56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.04	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72 -64 -56 -48 -40 -32 -24 -16 HORIZONTAL(DEG) 16 24 32 40 48 56 64 72																			
Φ t	0.00	0.00	0.00	0.33	2.40	8.17	21.2	38.8	50.2	51.8	43.9	27.7	12.4	4.23	1.06	0.06	0.00	0.00	262
Φ a	0.00	0.00	0.00	0.00	0.22	6.36	19.8	37.5	48.9	50.5	42.7	26.5	10.7	1.60	0.00	0.00	0.00	0.00	245


one-half-peak spread: U:22.5,D:22.9 , L:16.8,NEW Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:277.2V I:0.0469A P:6.333W PF:0.4872 Freq:50.00Hz Lamp Flux:262.166x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070105
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

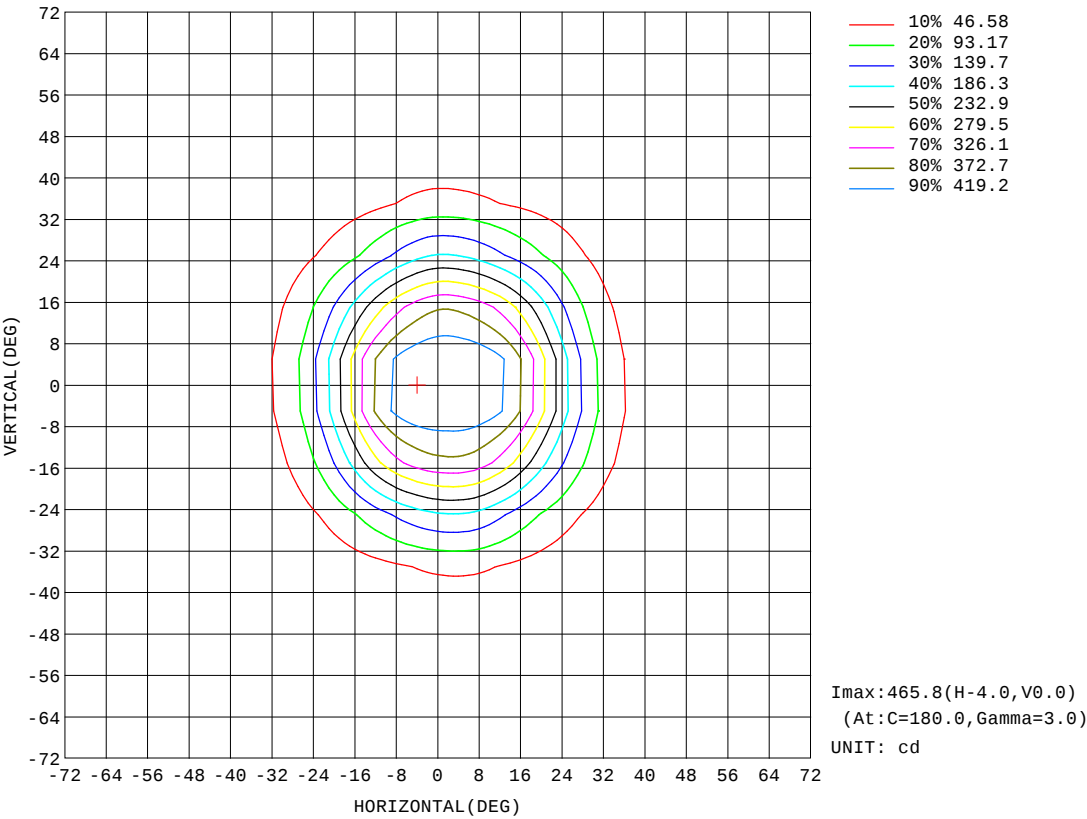


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:277.2V I:0.0469A P:6.333W PF:0.4872 Freq:50.00Hz Lamp Flux:262.166x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070105
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

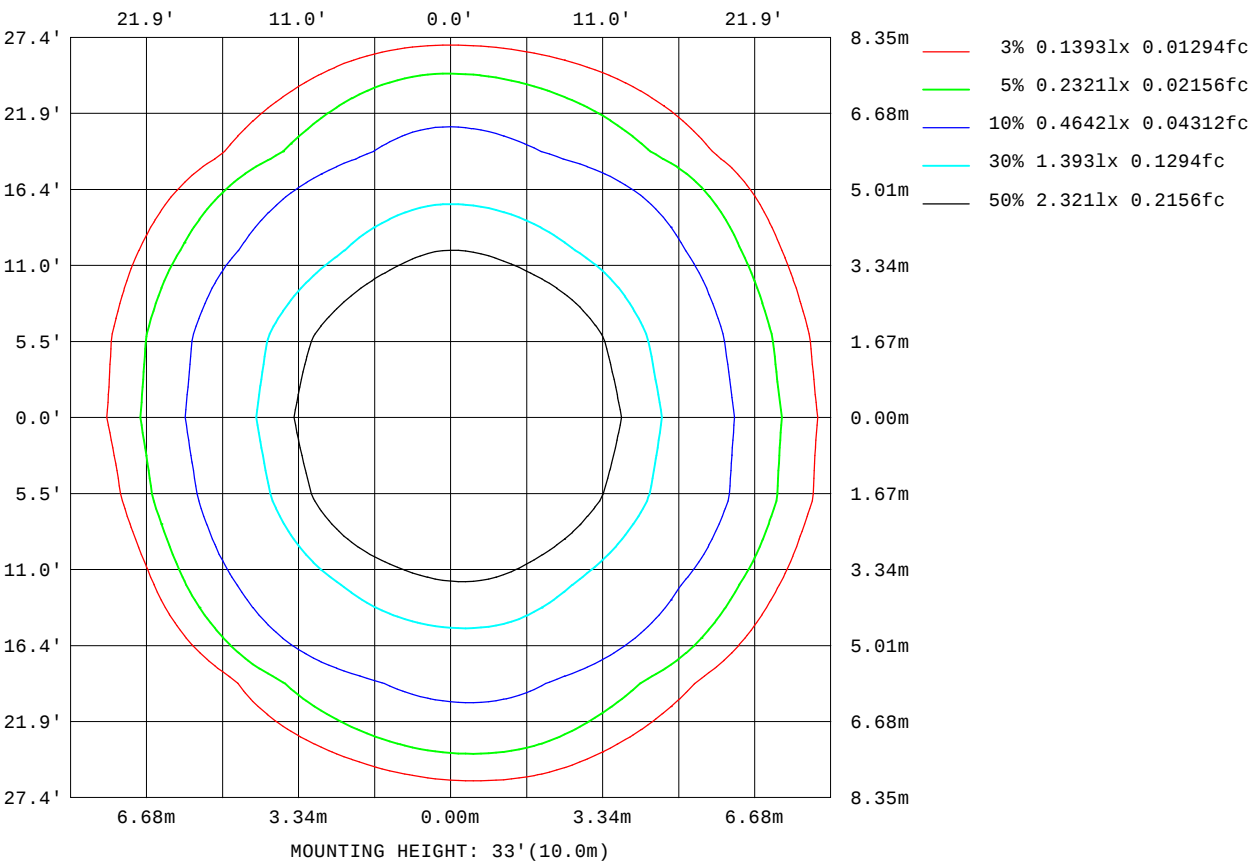

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

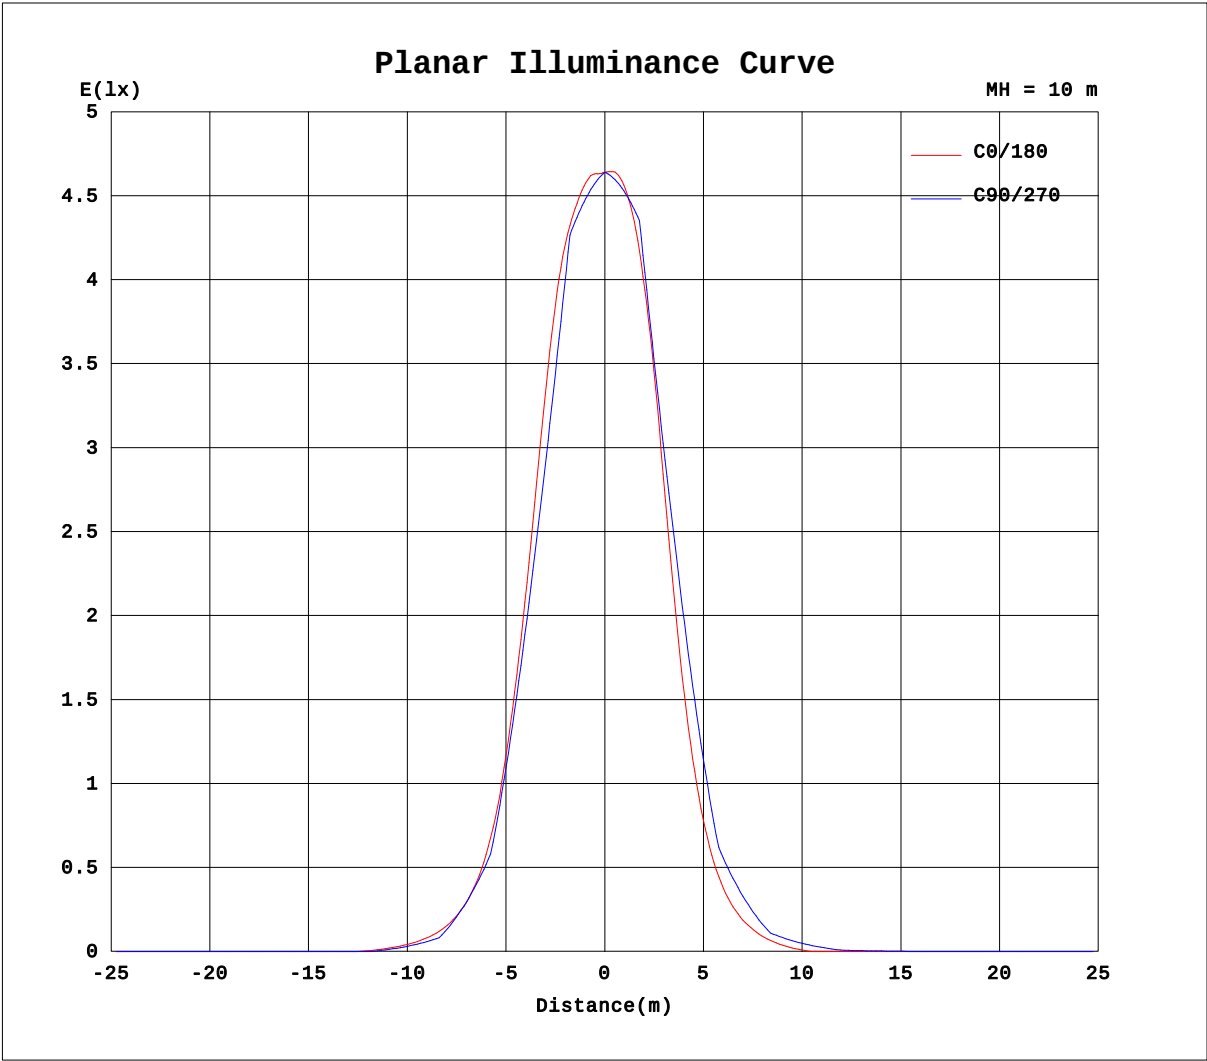


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.2V I:0.0469A P:6.333W PF:0.4872 Freq:50.00Hz Lamp Flux:262.166x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070105
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

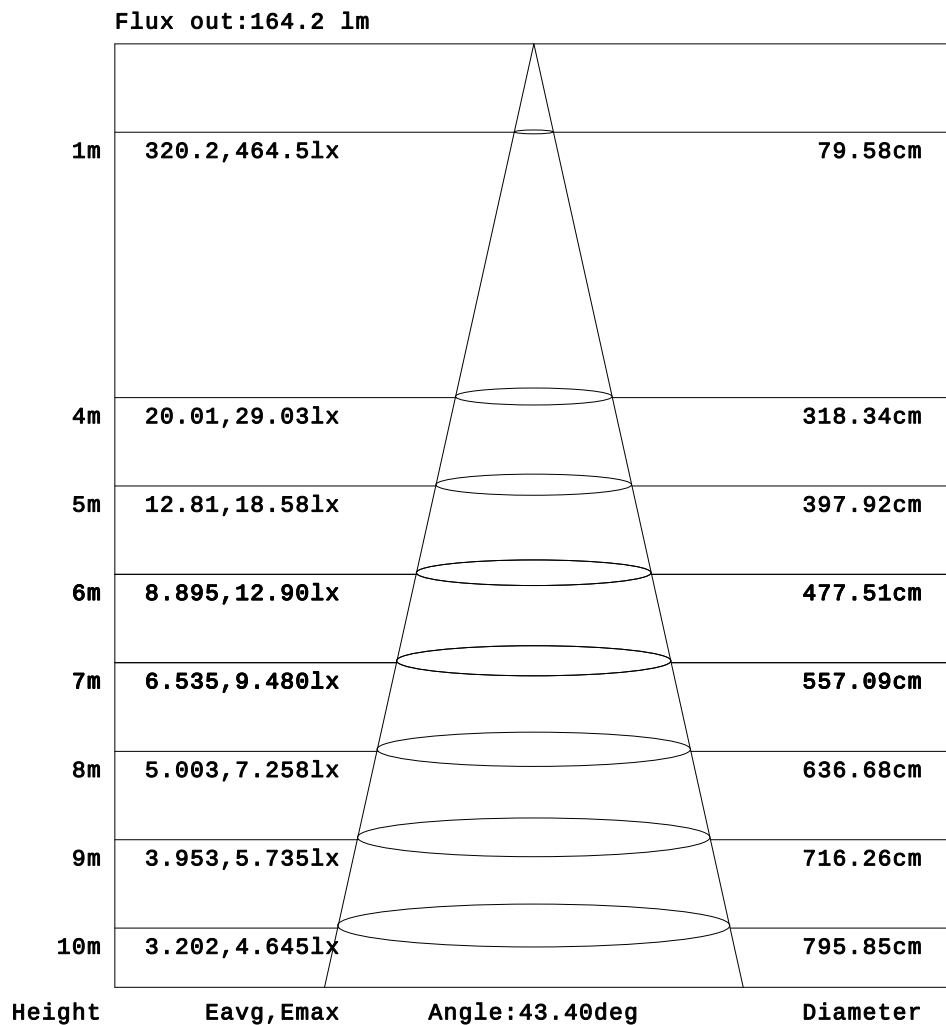

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.2V I:0.0469A P:6.333W PF:0.4872 Freq:50.00Hz Lamp Flux:262.166x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070105
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.06	2.87	4.96	7.27	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.84	6.51	10.8	15.4	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.17	3.28	8.28	16.6	26.5	36.8	46.8	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.27	8.17	19.1	34.2	50.6	66.9	81.6	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.82	5.74	18.0	37.2	64.3	97.8	132	162	181	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.07	14.0	34.2	64.6	107	159	211	252	274	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.96	17.8	40.8	79.4	141	219	292	338	359	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.76	10.8	29.0	60.0	114	204	311	397	436	447	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.05	10.9	28.2	58.4	113	204	318	407	447	455	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.03	16.5	36.9	73.9	142	249	369	441	465	464	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.24	13.2	30.3	60.9	117	208	317	403	445	459	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.12	15.5	33.2	65.4	123	210	307	388	434	456	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.48	10.6	23.8	46.0	83.5	142	214	286	339	368	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.84	10.1	21.4	38.6	64.4	102	151	210	260	283	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.28	5.22	13.3	24.5	40.5	63.3	94.0	132	168	189	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.23	9.01	16.0	24.6	36.0	50.5	69.3	87.7	95.4	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.07	4.03	8.98	14.7	22.0	30.9	42.1	53.6	60.0	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.93	4.10	7.51	11.3	15.4	19.8	23.4	24.7	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.15	1.73	3.40	5.24	7.76	10.5	13.0	14.2	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	1.25	2.40	3.27	3.60	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.50	1.09	1.57	1.80	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.2V I:0.0469A P:6.333W PF:0.4872 Freq:50.00Hz Lamp Flux:262.166x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070105
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	9.49	8.48	6.28	3.85	1.61	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	18.8	16.2	11.6	6.76	2.46	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	54.8	49.2	38.2	27.2	17.6	9.71	4.66	0.91	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	89.8	78.3	60.3	43.6	29.3	17.2	7.57	0.71	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	182	161	126	90.2	60.0	36.7	19.9	8.12	1.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	270	231	176	124	80.2	48.5	26.8	11.9	2.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	359	331	274	200	131	76.8	41.6	20.3	7.26	0.58	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	442	412	343	247	157	88.1	46.0	22.5	8.62	0.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	455	438	388	293	190	106	55.1	27.5	12.2	2.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	464	451	400	296	184	98.2	50.3	25.1	11.1	1.76	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	457	441	392	295	187	103	53.2	27.1	12.8	3.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	447	419	350	249	152	82.0	42.9	22.1	10.2	1.87	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	362	333	279	206	131	74.3	40.1	21.1	9.87	2.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	269	229	181	132	84.5	49.6	27.8	14.7	6.14	0.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	183	159	128	95.8	64.9	40.1	23.2	12.5	5.06	0.52	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	89.1	76.1	61.4	46.9	34.0	22.7	13.6	6.81	1.68	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	57.7	50.4	41.4	32.3	23.8	16.1	9.49	4.40	1.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	23.7	21.1	17.8	14.1	10.3	6.61	3.12	0.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	13.8	12.4	10.3	8.03	5.56	3.67	1.89	0.39	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	3.45	2.91	2.02	0.95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	1.75	1.53	1.11	0.59	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: