

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	1781.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	72.8V x 69.1H
	At 50% of Imax	44.9V x 43.3H
	At 90% of Imax	23.7V x 25.0H

Beam Flux	Total	998.0 lumens per klm.
	To 10% of Imax	924.5 lumens per klm.
	To 50% of Imax	614.3 lumens per klm.
	To 90% of Imax	228.1 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.8 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.4V I:0.0469A P:6.393W PF:0.4911 Freq:49.99Hz Lamp Flux:262.849x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070107
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

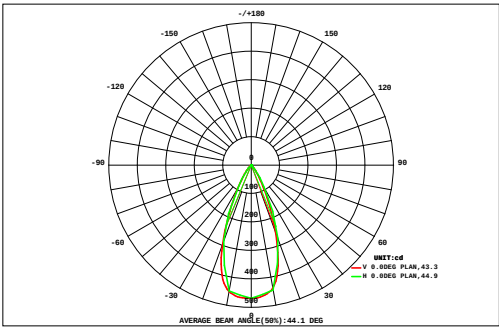

DATA OF LAMP		Eff:41.12lm/W	
MODE	SP-PZT-R110-3P-RDM-W	Imax(cd)	468.3
NOMINAL POWER(W)	6	AVAILABILITY(%)	92.9
RATED VOLTAGE(V)	277	Avai. FLUX(lm)	244.3
NOMINAL FLUX(lm)	262.849	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	262.8
TEST VOLTAGE(V)	277	θ @50%(H,V)	43,45DEG

AREA FLUX DIAGRAM																		UNIT:lm	Φ t	Φ a
72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
48	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.06	0.06	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.24	0.00
40	0.00	0.00	0.00	0.00	0.01	0.05	0.11	0.20	0.27	0.29	0.24	0.16	0.08	0.03	0.00	0.00	0.00	0.00	1.43	0.00
32	0.00	0.00	0.00	0.00	0.05	0.18	0.37	0.61	0.84	0.87	0.71	0.48	0.28	0.11	0.02	0.00	0.00	0.00	4.52	1.56
24	0.00	0.00	0.00	0.02	0.17	0.42	0.83	1.47	2.14	2.21	1.72	1.10	0.59	0.26	0.07	0.00	0.00	0.00	11.0	8.92
16	0.00	0.00	0.00	0.06	0.31	0.82	1.86	3.53	5.16	5.31	4.11	2.49	1.16	0.45	0.14	0.01	0.00	0.00	25.4	24.0
8	0.00	0.00	0.00	0.08	0.42	1.27	3.24	5.94	7.74	8.00	6.92	4.35	1.87	0.66	0.21	0.02	0.00	0.00	40.7	39.6
0	0.00	0.00	0.00	0.10	0.48	1.57	4.21	7.54	9.11	9.27	8.42	5.55	2.34	0.79	0.24	0.03	0.00	0.00	49.6	48.6
-8	0.00	0.00	0.00	0.10	0.50	1.67	4.46	7.70	8.93	9.02	8.15	5.37	2.25	0.75	0.22	0.02	0.00	0.00	49.1	48.1
-16	0.00	0.00	0.00	0.06	0.36	1.25	3.44	6.39	8.11	8.30	6.96	4.31	1.90	0.66	0.18	0.01	0.00	0.00	41.9	40.9
-24	0.00	0.00	0.00	0.01	0.19	0.70	1.83	3.40	4.86	5.22	4.02	2.38	1.14	0.43	0.10	0.00	0.00	0.00	24.3	23.1
-32	0.00	0.00	0.00	0.00	0.07	0.32	0.80	1.49	2.19	2.46	1.89	1.11	0.55	0.21	0.04	0.00	0.00	0.00	11.1	9.36
-40	0.00	0.00	0.00	0.00	0.01	0.08	0.20	0.38	0.57	0.65	0.51	0.32	0.15	0.04	0.00	0.00	0.00	0.00	2.91	0.20
-48	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.10	0.11	0.09	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.45	0.00
-56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.00
-64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
VERTICAL (DEG)	-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)	16	24	32	40	48	56	64	72			
Φ t	0.00	0.00	0.00	0.44	2.56	8.33	21.4	38.7	50.1	51.8	43.8	27.7	12.3	4.39	1.21	0.10	0.00	0.00	263	---
Φ a	0.00	0.00	0.00	0.00	0.23	6.38	19.9	37.4	48.8	50.4	42.5	26.3	10.6	1.68	0.00	0.00	0.00	0.00	---	244


one-half-peak spread: U:22.3,D:22.8 , L:21.8, Beam Type: Type 4 x 5 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:277.4V I:0.0469A P:6.393W PF:0.4911 Freq:49.99Hz Lamp Flux:262.849x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070107
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

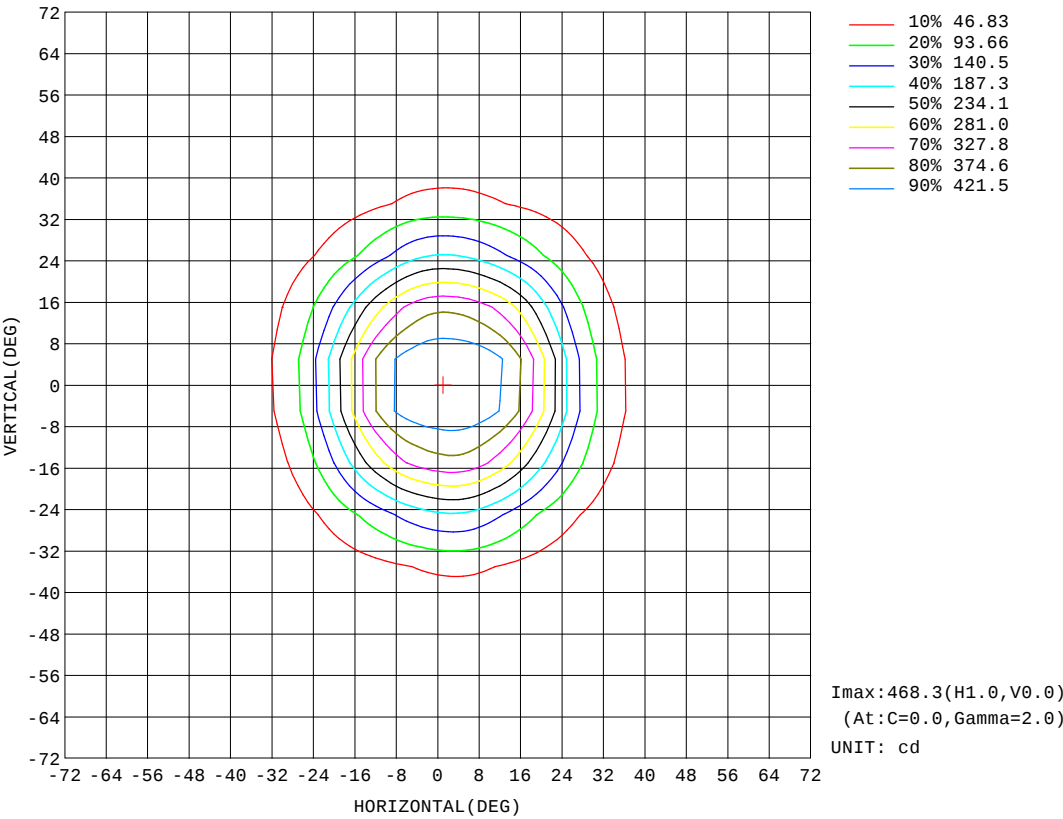


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:277.4V I:0.0469A P:6.393W PF:0.4911 Freq:49.99Hz Lamp Flux:262.849x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070107
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

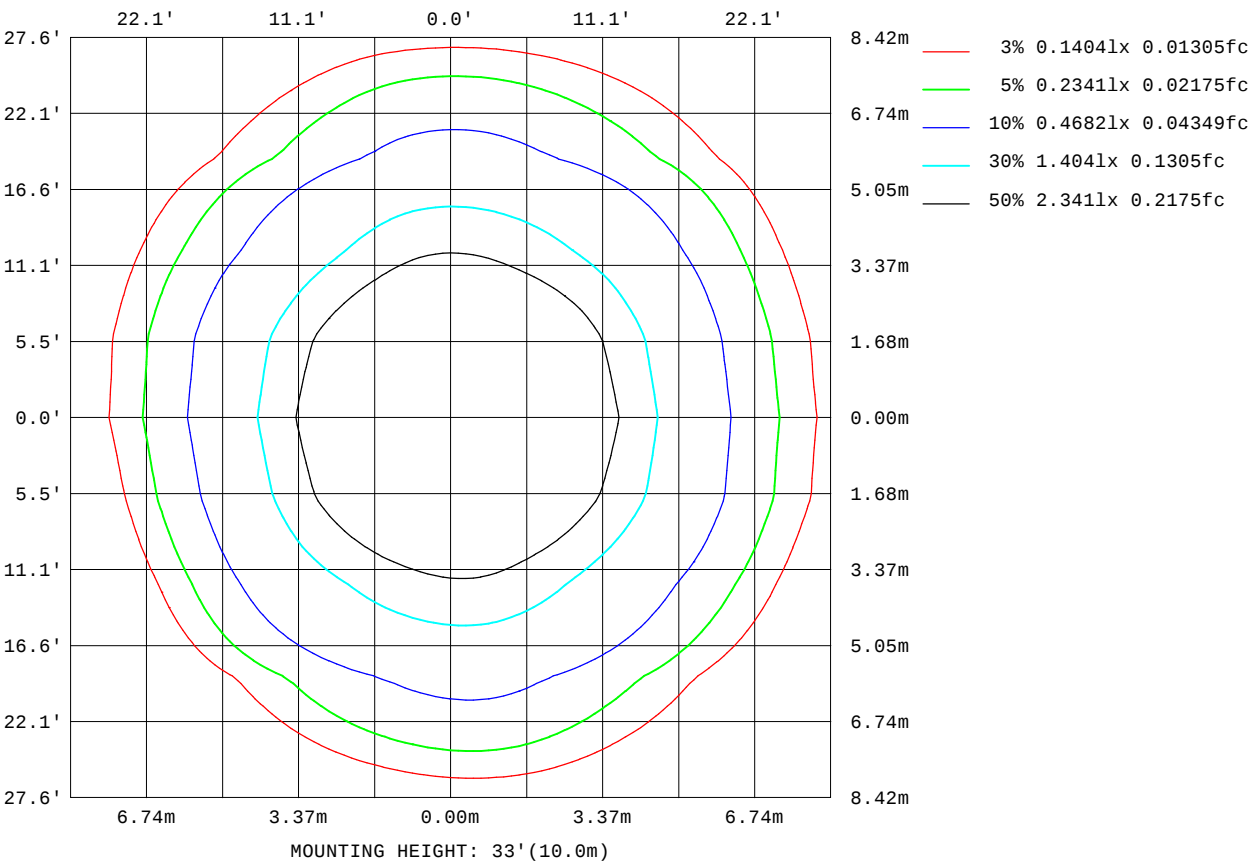

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

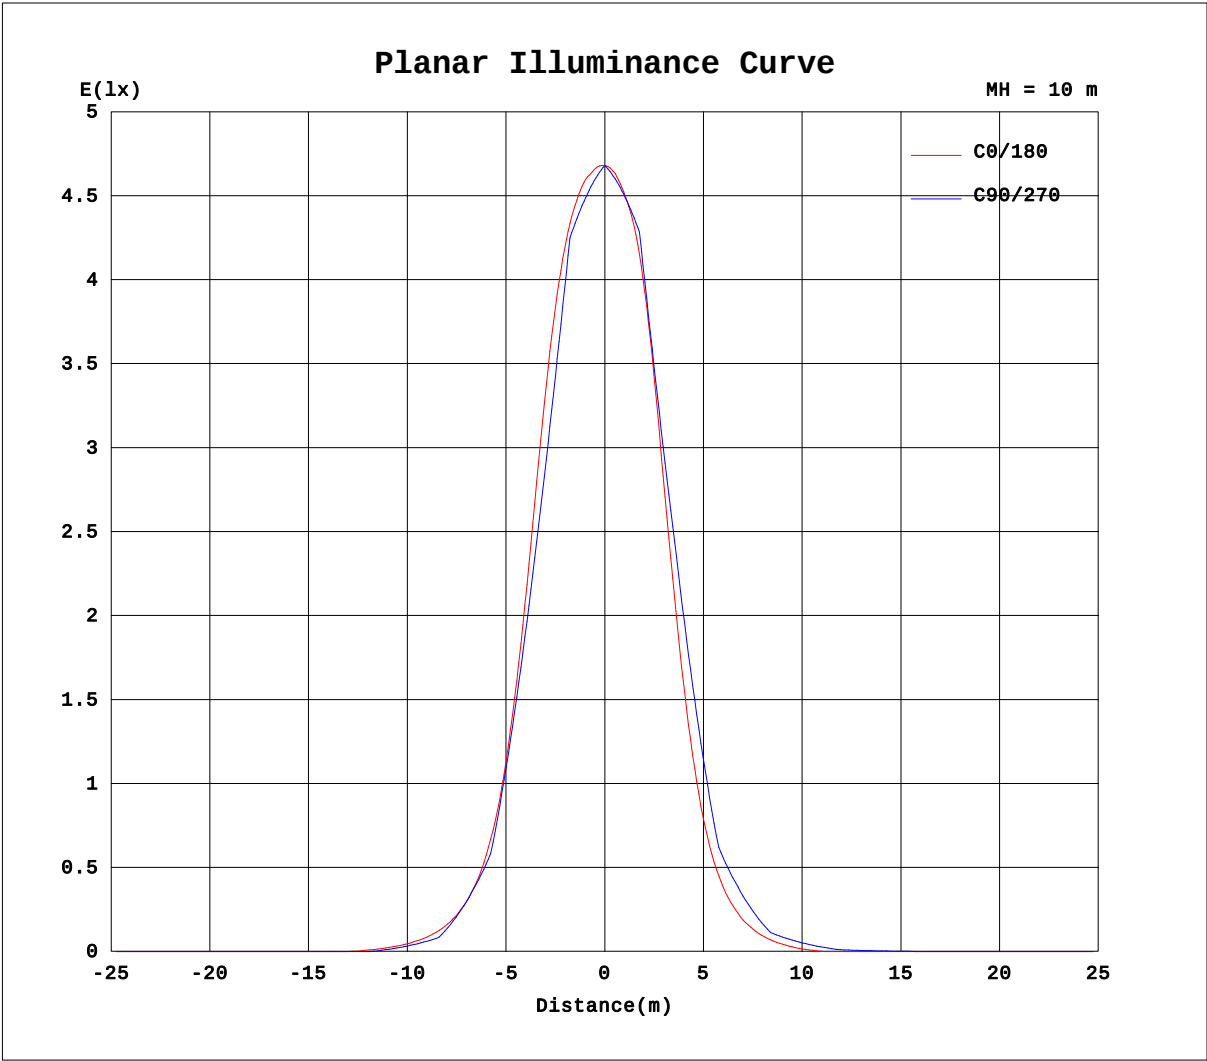


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.4V I:0.0469A P:6.393W PF:0.4911 Freq:49.99Hz Lamp Flux:262.849x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070107
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

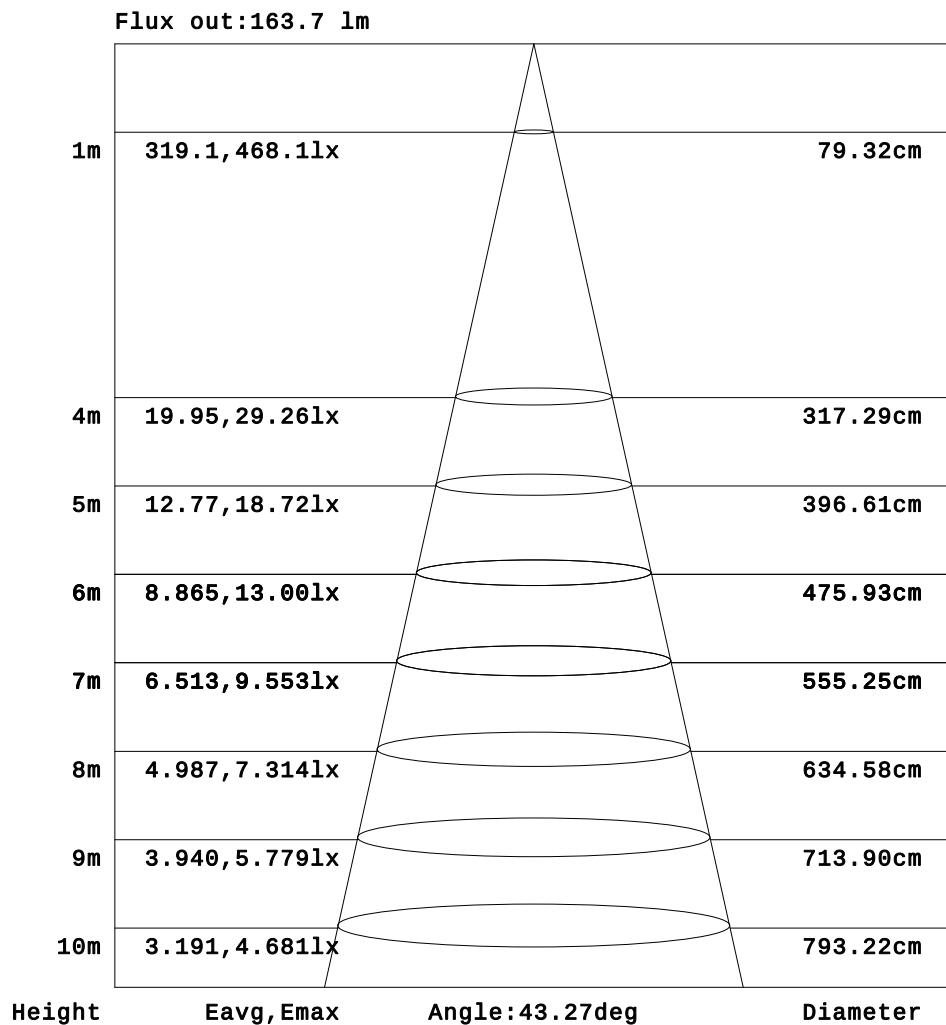

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.4V I:0.0469A P:6.393W PF:0.4911 Freq:49.99Hz Lamp Flux:262.849x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070107
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1 UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.55	2.42	4.27	6.13	8.00	9.47
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.84	5.59	9.25	13.0	16.7	19.3
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.38	4.79	9.99	17.8	27.2	37.4	47.0	54.0
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.97	11.2	21.0	33.6	49.2	65.9	80.7	90.4
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.08	8.09	19.2	37.6	64.4	96.6	129	160	180
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.70	15.9	33.2	63.6	108	157	206	249	273
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.79	7.14	19.0	40.2	78.6	141	217	286	335	357
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.01	12.3	28.7	59.3	114	204	306	391	433	446
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.77	12.3	28.5	58.4	114	206	315	403	444	456
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.73	17.4	37.4	74.8	145	251	366	439	462	468
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.89	14.1	31.1	61.7	118	210	317	403	443	458
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.49	16.4	34.1	66.2	123	211	310	390	433	449
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.73	11.5	24.8	46.8	84.1	143	217	289	342	365
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.99	11.2	22.5	39.6	65.2	104	154	213	265	283
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.82	6.21	14.4	25.8	41.9	65.1	96.5	134	171	189
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.21	10.3	17.6	26.6	38.0	53.0	71.7	89.0	95.7
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.55	5.01	10.3	16.3	23.6	32.8	44.0	55.0	60.4
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.73	5.17	8.75	12.6	16.7	21.0	24.3	25.6
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.54	2.24	4.00	6.01	8.78	11.6	13.8	14.9
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.55	1.95	3.12	4.01	4.35
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.13	0.85	1.45	1.94	2.18
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.4V I:0.0469A P:6.393W PF:0.4911 Freq:49.99Hz Lamp Flux:262.849x1 lm		
NAME: 8.03.036.0003 45° SP-PZT-R110-3P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070107
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	9.78	8.84	6.98	4.93	2.91	1.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	19.4	17.0	13.2	9.08	5.07	1.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	55.3	49.0	38.4	28.1	18.8	11.1	5.56	2.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	89.9	77.1	59.4	43.3	29.3	18.0	9.61	3.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	181	158	123	88.0	58.8	36.8	20.9	9.85	2.78	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	266	225	172	120	78.5	48.3	27.1	13.0	4.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	358	325	270	197	128	75.4	41.5	21.2	8.83	1.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	441	406	339	245	154	86.2	46.0	23.4	9.86	1.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	456	436	385	292	186	104	55.2	28.6	13.4	3.73	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	466	451	399	296	180	97.0	51.0	26.4	12.3	3.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	456	440	392	295	185	102	54.2	28.5	14.1	4.57	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	443	417	354	249	151	82.7	44.6	23.6	11.4	3.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	360	332	282	206	131	75.3	41.7	22.6	11.2	3.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	269	231	183	131	85.0	51.3	29.5	16.2	7.29	0.80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	184	161	130	96.6	65.6	41.6	24.8	13.9	6.18	0.99	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	91.3	78.6	63.4	48.7	35.4	24.1	14.9	8.01	2.57	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	59.2	52.3	43.1	33.9	25.1	17.3	10.7	5.39	1.78	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	25.0	22.5	19.1	15.4	11.5	7.68	4.11	0.90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	14.8	13.4	11.4	9.03	6.45	4.21	2.39	0.76	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	4.24	3.69	2.81	1.62	0.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	2.14	1.92	1.50	0.94	0.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: