

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		22229.1 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	17.8V x 14.3H
	At 50% of Imax	9.2V x 7.8H
	At 90% of Imax	3.3V x 3.2H
Beam Flux	Total	918.2 lumens per klm.
	To 10% of Imax	555.6 lumens per klm.
	To 50% of Imax	281.2 lumens per klm.
	To 90% of Imax	29.0 lumens per klm.
Upward LOR		0.0 %
Downward LOR		91.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.2V I:0.4011A P:30.22W PF:0.6267 Freq:50.00Hz Lamp Flux:1787.12x1 lm		
NAME: SP-PZT-R135-6P-RDM-4	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080058
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

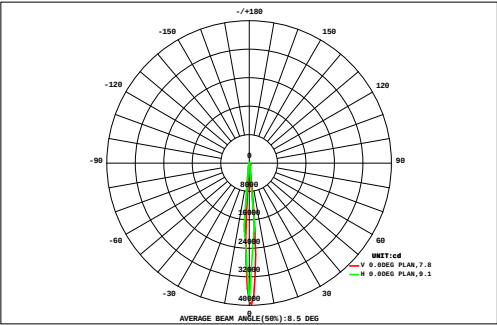

DATA OF LAMP		Eff:59.14lm/W	
MODE	SP-PZT-R135-6P-RDM-4	Imax(cd)	39726
NOMINAL POWER(W)	30	AVAILABILITY(%)	65.6
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	1173
NOMINAL FLUX(lm)	1787.12	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1787
TEST VOLTAGE(V)	120	θ @50%(H,V)	8,9DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.53	0.60	0.68	0.75	0.85	0.94	1.03	1.07	1.08	1.03	0.95	0.86	0.77	0.68	0.59	0.52	0.46	0.40	13.8	0.00
9	0.53	0.60	0.68	0.75	0.85	0.94	1.03	1.07	1.08	1.03	0.95	0.86	0.77	0.68	0.59	0.52	0.46	0.40	13.8	0.00
8	0.58	0.66	0.74	0.82	0.92	1.03	1.12	1.17	1.16	1.10	1.01	0.91	0.80	0.70	0.61	0.54	0.47	0.41	14.7	0.00
7	0.62	0.71	0.80	0.89	1.00	1.12	1.21	1.26	1.25	1.18	1.07	0.95	0.83	0.72	0.63	0.55	0.47	0.41	15.7	3.73
6	0.67	0.76	0.86	0.96	1.08	1.20	1.31	1.36	1.34	1.26	1.13	1.00	0.87	0.75	0.65	0.56	0.48	0.42	16.6	5.26
5	0.39	0.46	0.50	0.70	0.92	1.44	2.69	4.12	5.27	6.44	7.15	7.26	6.93	5.70	4.28	2.91	1.72	1.09	60.0	55.9
4	0.38	0.45	0.49	0.71	0.96	1.55	3.01	4.70	6.06	7.45	8.29	8.43	8.06	6.62	4.95	3.35	1.95	1.22	68.6	65.6
3	0.36	0.44	0.47	0.72	1.00	1.67	3.34	5.28	6.85	8.45	9.44	9.61	9.19	7.54	5.63	3.79	2.18	1.34	77.3	74.3
2	0.35	0.43	0.46	0.73	1.03	1.78	3.67	5.86	7.63	9.46	10.6	10.8	10.3	8.46	6.30	4.23	2.41	1.47	85.9	83.0
1	0.34	0.41	0.44	0.74	1.07	1.90	3.99	6.44	8.42	10.5	11.7	12.0	11.4	9.38	6.98	4.66	2.64	1.60	94.6	91.6
0	0.98	1.36	2.33	4.74	7.51	9.68	11.8	13.1	13.2	12.4	9.95	7.16	4.53	2.31	1.25	0.87	0.70	0.59	104	101
-1	1.09	1.53	2.67	5.47	8.71	11.2	13.5	14.7	14.7	13.6	10.6	7.25	4.20	1.78	0.76	0.54	0.53	0.51	113	110
-2	1.20	1.69	3.00	6.21	9.91	12.7	15.2	16.4	16.2	14.8	11.2	7.34	3.86	1.25	0.27	0.21	0.37	0.43	122	120
-3	1.30	1.85	3.33	6.94	11.1	14.2	16.9	18.1	17.7	16.0	11.8	7.43	3.53	0.72	0.00	0.00	0.21	0.35	131	130
-4	1.41	2.02	3.66	7.68	12.3	15.7	18.6	19.8	19.2	17.1	12.4	7.52	3.20	0.18	0.00	0.00	0.04	0.27	141	141
-5	0.29	0.32	0.26	0.23	0.19	0.49	1.51	2.79	3.90	5.09	5.99	6.34	6.26	5.26	3.97	2.67	1.52	0.93	48.0	45.3
-6	0.18	0.15	0.00	0.00	0.00	0.00	0.00	1.08	2.35	3.86	5.33	6.20	6.54	5.74	4.42	2.97	1.66	0.99	41.5	39.1
-7	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.80	2.64	4.66	6.05	6.83	6.23	4.86	3.27	1.79	1.04	38.2	36.3
-8	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.41	4.00	5.91	7.11	6.72	5.31	3.56	1.93	1.10	37.0	35.9
-9	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	-9	-8	-7	-6	-5	-4	-3	-2	-1	0	1	2	3	4	5	6	7	8	9	
Φ t	10.7	13.8	20.7	38.3	58.6	76.6	99.0	117	127	134	127	113	95.3	70.7	51.5	35.2	21.5	14.6	1225	---
Φ a	2.71	8.46	15.0	31.0	49.6	71.8	96.8	114	124	130	123	109	92.0	67.0	47.9	31.4	17.8	5.62	---	1138


one-half-peak spread: U:4.6,D:4.7 , L:3.8,R:4.0 NEMA Beam Type: Type 1

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.2V I:0.4011A P:30.22W PF:0.6267 Freq:50.00Hz Lamp Flux:1787.12x1 lm		
NAME: SP-PZT-R135-6P-RDM-4	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080058
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

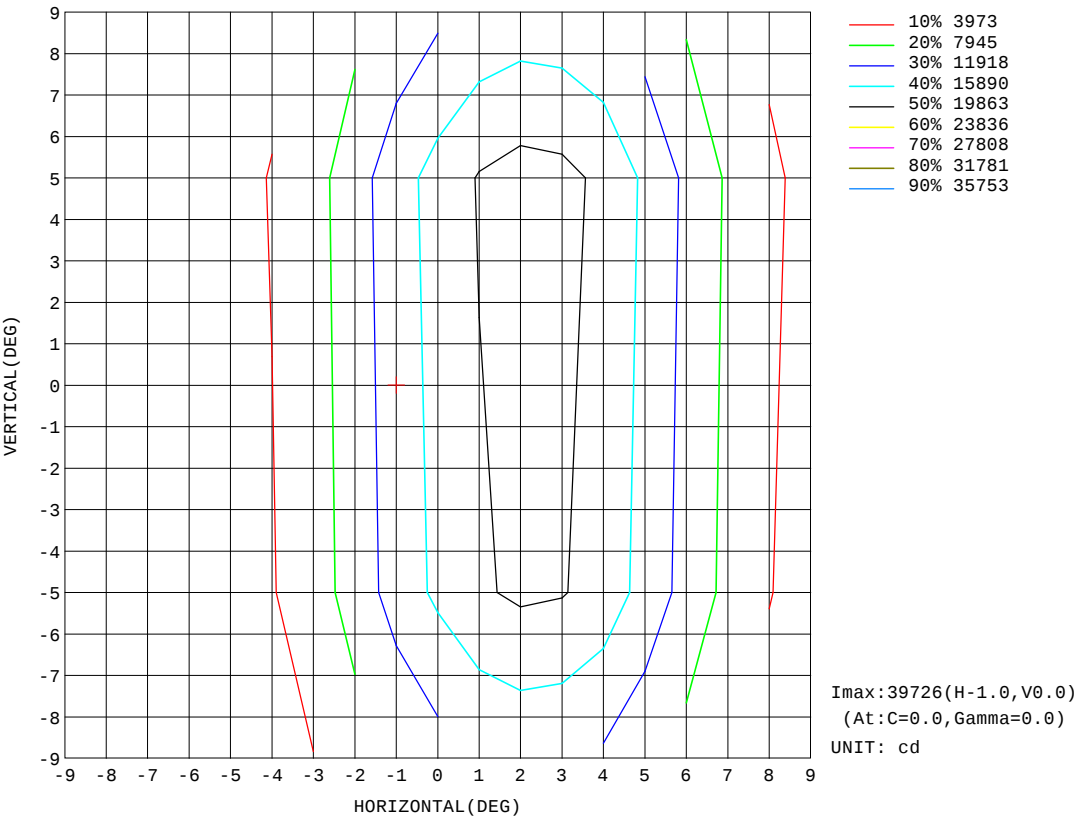


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.2V I:0.4011A P:30.22W PF:0.6267 Freq:50.00Hz Lamp Flux:1787.12x1 lm		
NAME: SP-PZT-R135-6P-RDM-4	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080058
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

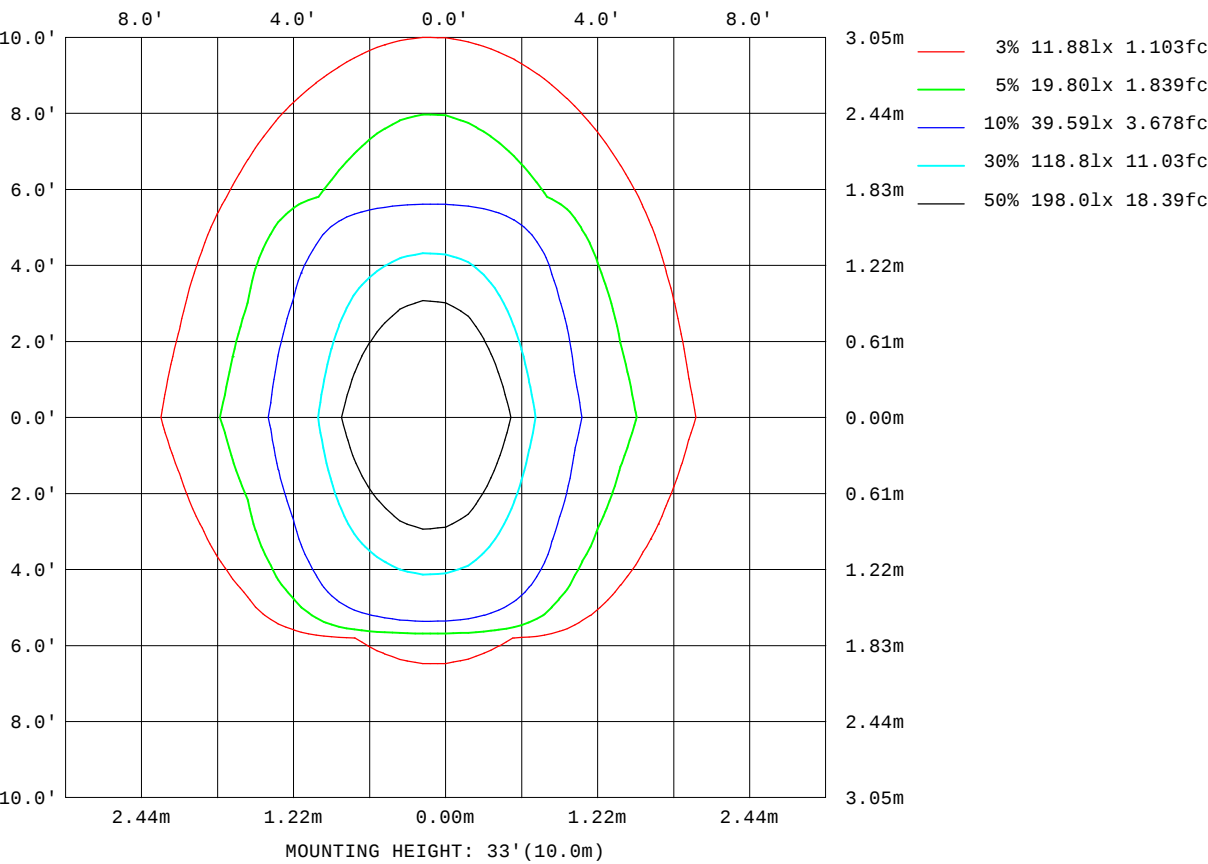

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

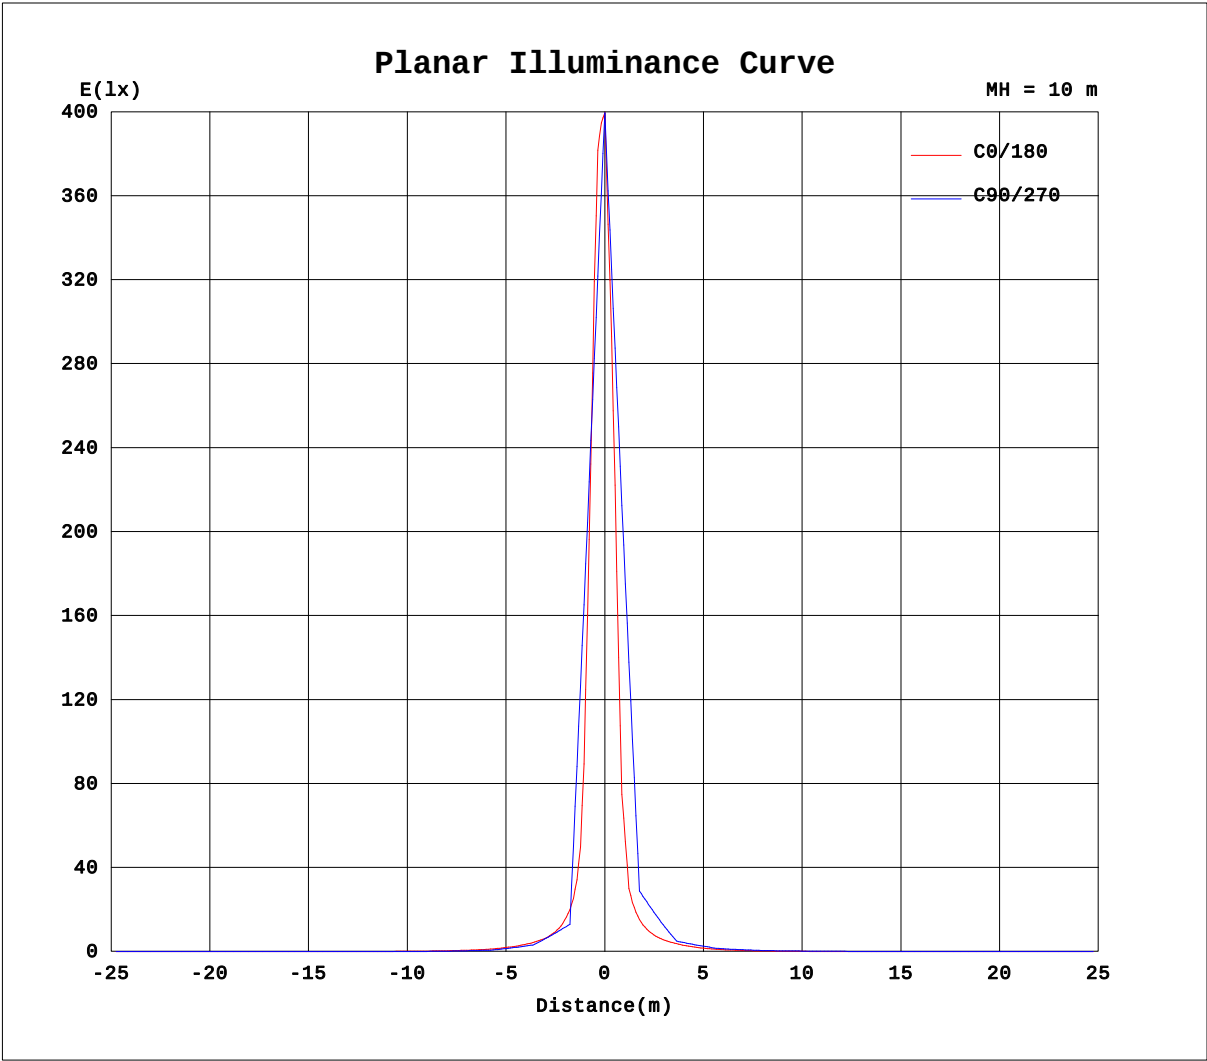


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.2V I:0.4011A P:30.22W PF:0.6267 Freq:50.00Hz Lamp Flux:1787.12x1 lm		
NAME: SP-PZT-R135-6P-RDM-4	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080058
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

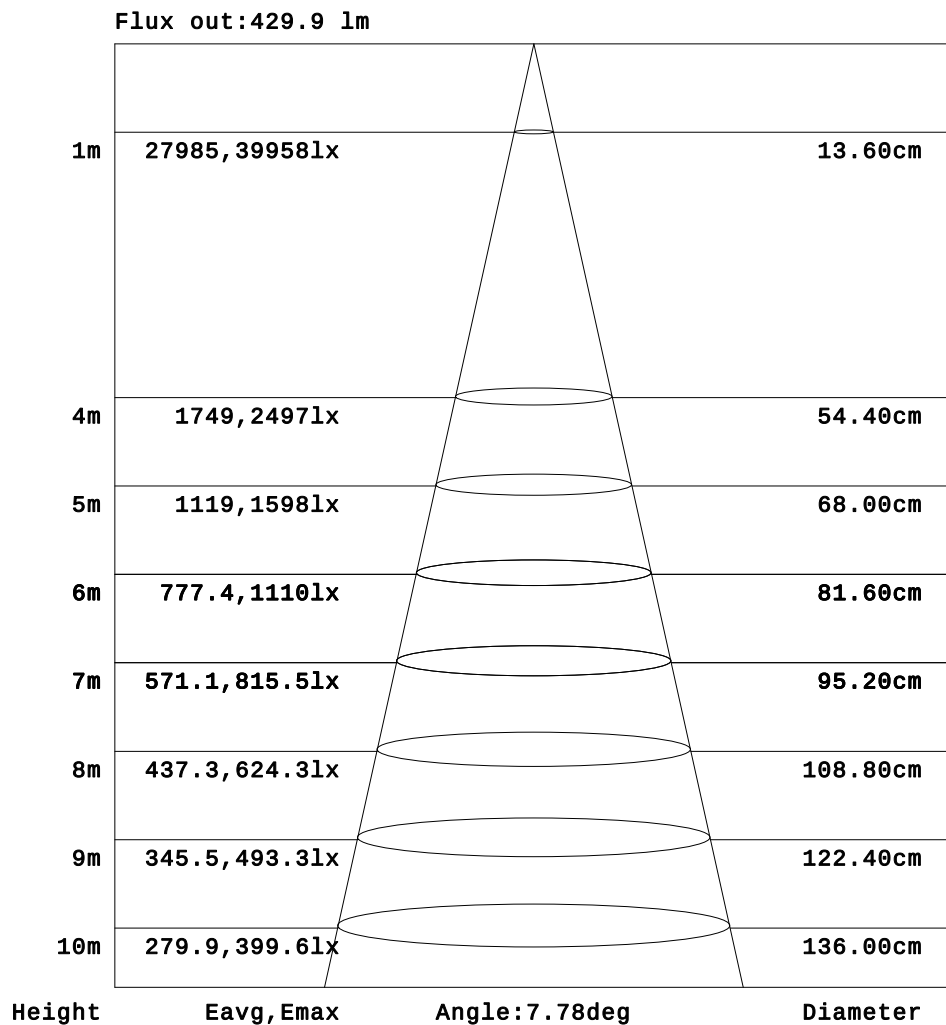

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.2V I:0.4011A P:30.22W PF:0.6267 Freq:50.00Hz Lamp Flux:1787.12x1 lm		
NAME: SP-PZT-R135-6P-RDM-4	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080058
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1		UNIT: ×10cd																	
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.34	0.60	0.81	1.04	1.30	1.57	1.87	2.19	2.31
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.47	0.99	1.48	1.90	2.38	2.92	3.49	4.19	4.56	4.64
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.27	0.73	1.30	1.95	2.65	3.49	4.52	5.60	6.61	7.55	8.05
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.28	0.96	1.68	2.35	3.26	4.38	5.73	7.46	8.91	10.2	11.3	11.7
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.28	1.02	1.87	2.84	3.98	5.55	7.81	10.6	14.3	18.6	22.4	24.8
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.23	1.12	2.08	3.24	4.63	6.47	9.25	13.1	17.9	24.8	31.7	37.0	38.6
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.90	1.99	3.05	4.46	6.33	9.56	14.4	21.8	32.2	47.0	66.1	84.9
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.75	2.03	3.12	4.48	6.38	9.58	15.0	24.0	37.1	56.5	84.1	120	137
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.31	1.52	2.75	3.93	5.65	8.41	13.2	20.9	34.3	54.8	95.5	259	1666
0	0.00	0.00	0.00	0.00	0.00	0.07	1.30	2.56	3.68	5.26	7.80	12.6	19.4	32.7	53.3	93.7	218	1823	3887
5	0.00	0.00	0.00	0.00	0.00	0.00	0.56	1.87	3.05	4.29	6.30	9.59	14.4	22.9	37.5	60.3	107	292	1739
10	0.00	0.00	0.00	0.00	0.00	0.16	1.38	2.65	3.77	5.45	8.29	12.2	18.4	29.6	45.9	72.7	127	228	303
15	0.00	0.00	0.00	0.00	0.00	0.00	0.60	1.84	3.04	4.23	6.22	9.14	12.8	18.9	28.9	43.5	65.9	108	169
20	0.00	0.00	0.00	0.00	0.00	0.12	1.26	2.49	3.64	5.20	7.38	10.2	13.8	19.5	28.1	38.2	49.0	58.3	61.3
25	0.00	0.00	0.00	0.00	0.00	0.00	0.37	1.49	2.69	3.89	5.41	7.48	9.91	13.1	17.8	23.9	30.7	37.4	41.9
30	0.00	0.00	0.00	0.00	0.00	0.00	0.80	1.89	3.17	4.35	5.71	7.58	9.56	11.9	14.4	17.7	20.5	22.9	23.5
35	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.91	1.97	3.18	4.36	5.55	7.03	8.61	10.4	12.3	14.3	16.0	17.1
40	0.00	0.00	0.00	0.00	0.00	0.00	0.23	1.15	2.20	3.44	4.34	5.30	6.36	7.44	8.52	9.50	10.3	10.7	10.8
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.30	1.04	2.02	3.08	3.90	4.82	5.67	6.45	7.16	7.77	8.21	8.43
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.23	1.00	1.93	2.79	3.59	4.36	4.84	5.24	5.59	5.86	6.03	6.07
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.27	0.70	1.50	2.22	2.85	3.43	3.90	4.27	4.55	4.76	4.86
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.44	1.09	1.60	2.10	2.61	3.00	3.33	3.53	3.62	3.66
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.36	0.65	0.90	1.28	1.64	1.95	2.16	2.32	2.38
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.40	0.65	0.87	1.01	1.10	1.12
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.13	0.25	0.37	0.46	0.53	0.56
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.2V I:0.4011A P:30.22W PF:0.6267 Freq:50.00Hz Lamp Flux:1787.12x1 lm		
NAME: SP-PZT-R135-6P-RDM-4	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080058
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2 UNIT: ×10cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	2.31	2.17	1.84	1.57	1.31	1.05	0.81	0.60	0.36	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	4.48	3.95	3.35	2.82	2.31	1.81	1.37	0.90	0.43	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	8.11	7.70	6.69	5.70	4.63	3.61	2.76	2.02	1.36	0.78	0.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	11.4	10.3	8.86	7.38	5.65	4.34	3.24	2.30	1.61	0.90	0.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	24.9	22.6	18.8	14.5	10.7	7.75	5.61	4.09	2.92	1.96	1.08	0.28	0.00	0.00	0.00	0.00	0.00	0.00
-20	36.1	30.7	23.7	16.9	11.9	8.36	6.08	4.40	3.06	1.94	0.96	0.06	0.00	0.00	0.00	0.00	0.00	0.00
-15	84.5	65.3	46.4	31.9	21.4	14.0	9.34	6.39	4.53	3.13	2.03	0.92	0.05	0.00	0.00	0.00	0.00	0.00
-10	112	75.9	50.9	33.3	21.3	13.4	8.69	6.00	4.24	2.94	1.82	0.53	0.00	0.00	0.00	0.00	0.00	0.00
-5	1452	202	89.1	52.1	32.7	20.3	12.7	8.28	5.64	3.93	2.71	1.49	0.24	0.00	0.00	0.00	0.00	0.00
0	710	159	75.9	45.5	28.1	17.1	11.1	7.11	4.84	3.37	2.23	0.93	0.00	0.00	0.00	0.00	0.00	0.00
5	1522	233	100	57.3	35.8	22.0	14.0	9.27	6.23	4.27	2.97	1.75	0.45	0.00	0.00	0.00	0.00	0.00
10	200	110	64.1	40.9	25.7	16.3	11.1	7.49	5.04	3.52	2.31	1.03	0.00	0.00	0.00	0.00	0.00	0.00
15	166	105	64.6	42.4	28.1	18.2	12.5	8.81	6.09	4.20	2.92	1.67	0.42	0.00	0.00	0.00	0.00	0.00
20	56.4	46.4	35.3	25.6	17.7	12.6	9.33	6.61	4.65	3.33	2.04	0.81	0.00	0.00	0.00	0.00	0.00	0.00
25	41.8	37.1	30.3	23.4	17.3	12.8	9.74	7.28	5.29	3.84	2.55	1.33	0.19	0.00	0.00	0.00	0.00	0.00
30	22.4	19.8	16.8	13.7	11.2	9.16	7.18	5.35	4.08	2.78	1.58	0.42	0.00	0.00	0.00	0.00	0.00	0.00
35	17.0	16.0	14.2	12.2	10.2	8.56	7.02	5.51	4.28	3.11	1.86	0.76	0.03	0.00	0.00	0.00	0.00	0.00
40	10.7	10.1	9.24	8.24	7.16	6.10	5.02	4.17	3.12	1.87	0.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	8.42	8.21	7.74	7.14	6.45	5.66	4.81	3.88	3.04	1.97	0.94	0.20	0.00	0.00	0.00	0.00	0.00	0.00
50	6.01	5.85	5.56	5.23	4.80	4.23	3.46	2.64	1.77	0.79	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	4.85	4.78	4.57	4.29	3.95	3.46	2.88	2.22	1.50	0.70	0.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	3.62	3.49	3.27	2.95	2.54	2.02	1.54	0.94	0.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	2.38	2.33	2.18	1.97	1.68	1.31	0.92	0.66	0.34	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	1.08	1.01	0.87	0.64	0.40	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.56	0.53	0.48	0.39	0.27	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-07

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: