

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		28343.1 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	17.4V x 10.7H
	At 50% of Imax	10.1V x 7.3H
	At 90% of Imax	3.8V x 4.7H
Beam Flux	Total	934.6 lumens per klm.
	To 10% of Imax	622.2 lumens per klm.
	To 50% of Imax	359.8 lumens per klm.
	To 90% of Imax	38.8 lumens per klm.
Upward LOR		0.0 %
Downward LOR		93.5 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.7V I:0.2735A P:38.77W PF:1.000 Freq:50.00Hz Lamp Flux:3393.64x1 lm		
NAME: 8.03.012.0129 5° SP-EA-R225A-12P-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

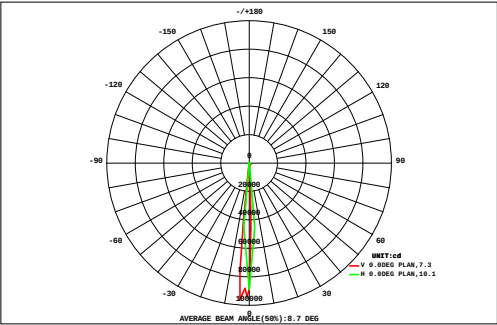

DATA OF LAMP		Eff:87.53lm/W	
MODEL	SP-EA-R225A-12P-RDM	Imax(cd)	96186
NOMINAL POWER(W)	38	AVAILABILITY(%)	71.1
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	2413
NOMINAL FLUX(lm)	3393.64	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	3394
TEST VOLTAGE(V)	220	θ @50%(H,V)	7,10DEG


		AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	9	0.32	0.34	0.36	0.38	0.39	0.41	0.43	0.44	0.46	0.47	0.47	0.48	0.47	0.47	0.45	0.44	0.42	0.41	7.61	0.00
	8	0.33	0.35	0.37	0.39	0.41	0.43	0.45	0.46	0.48	0.49	0.50	0.50	0.50	0.49	0.48	0.46	0.44	0.43	7.98	0.00
	7	0.35	0.37	0.39	0.41	0.43	0.45	0.47	0.48	0.50	0.52	0.52	0.52	0.52	0.51	0.50	0.48	0.46	0.44	8.34	0.00
	6	0.36	0.38	0.40	0.43	0.45	0.47	0.49	0.51	0.53	0.54	0.55	0.55	0.54	0.54	0.52	0.51	0.48	0.46	8.71	0.00
	5	0.39	0.43	0.47	0.51	0.61	0.00	4.12	8.13	14.6	16.4	14.7	15.2	18.0	15.8	8.98	3.64	1.67	0.94	125	120
	4	0.41	0.45	0.49	0.54	0.65	0.00	4.80	9.54	17.2	19.3	17.2	17.8	21.2	18.6	10.5	4.23	1.91	1.05	146	141
	3	0.42	0.46	0.52	0.57	0.70	0.00	5.48	10.9	19.8	22.3	19.8	20.5	24.4	21.4	12.1	4.82	2.14	1.15	167	161
	2	0.44	0.48	0.54	0.60	0.74	0.00	6.15	12.3	22.3	25.2	22.4	23.2	27.5	24.2	13.7	5.41	2.37	1.25	189	182
	1	0.45	0.50	0.57	0.63	0.79	0.00	6.83	13.7	24.9	28.1	25.0	25.9	30.7	27.0	15.2	6.00	2.61	1.35	210	203
	0	0.47	0.52	0.59	0.66	0.83	0.00	7.51	15.2	27.5	31.0	27.6	28.6	33.9	29.8	16.8	6.58	2.84	1.46	232	224
	-1	0.49	0.54	0.62	0.69	0.87	0.00	8.19	16.6	30.1	33.9	30.2	31.2	37.1	32.6	18.3	7.17	3.07	1.56	253	248
	-2	0.50	0.56	0.64	0.72	0.92	0.00	8.86	18.0	32.7	36.8	32.7	33.9	40.3	35.4	19.9	7.76	3.30	1.66	275	270
	-3	0.52	0.58	0.67	0.75	0.96	0.00	9.54	19.4	35.2	39.7	35.3	36.6	43.5	38.2	21.4	8.35	3.54	1.77	296	291
	-4	0.54	0.60	0.69	0.78	1.01	0.00	10.2	20.8	37.8	42.6	37.9	39.3	46.7	41.0	23.0	8.94	3.77	1.87	317	312
	-5	0.40	0.44	0.49	0.54	0.63	0.12	3.55	6.85	12.2	13.7	12.2	12.7	15.0	13.2	7.58	3.18	1.54	0.92	105	100
	-6	0.39	0.43	0.47	0.52	0.60	0.22	2.89	5.46	9.61	10.8	9.69	10.0	11.8	10.4	6.05	2.61	1.33	0.83	84.2	73.9
	-7	0.38	0.42	0.46	0.50	0.57	0.31	2.23	4.08	7.05	7.92	7.14	7.39	8.66	7.65	4.52	2.05	1.11	0.74	63.2	54.4
	-8	0.37	0.40	0.44	0.48	0.54	0.40	1.58	2.70	4.50	5.04	4.59	4.75	5.51	4.88	2.99	1.48	0.90	0.65	42.2	32.3
	-9	-9	-8	-7	-6	-5	-4	-3	-2	HORIZONTAL(DEG)					2	3	4	5	6	7	8
Φ t	7.55	8.28	9.18	10.1	12.1	2.81	83.8	165	297	335	299	309	366	322	183	74.1	33.9	18.9	2537	---	
Φ a	0.00	0.00	0.00	0.00	0.00	0.00	75.3	161	295	333	296	307	364	320	181	66.1	13.7	0.00	---	2413	

one-half-peak spread: U:5.1,D:5.1 , L:2.5,R:1.8 NEMA Beam Type: Type 1

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2024-11-23
 V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.7V I:0.2735A P:38.77W PF:1.000 Freq:50.00Hz Lamp Flux:3393.64x1 lm		
NAME: 8.03.012.0129 5° SP-EA-R225A-12P-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

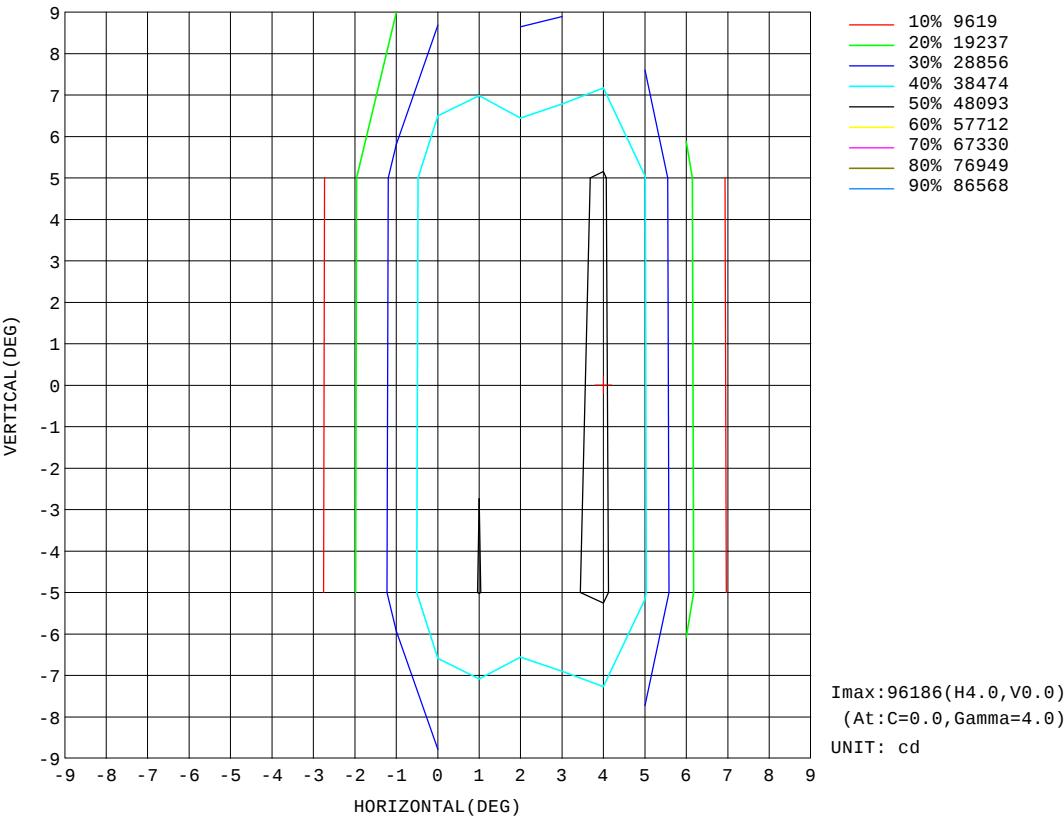


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.7V I:0.2735A P:38.77W PF:1.000 Freq:50.00Hz Lamp Flux:3393.64x1 lm		
NAME: 8.03.012.0129 5° SP-EA-R225A-12P-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

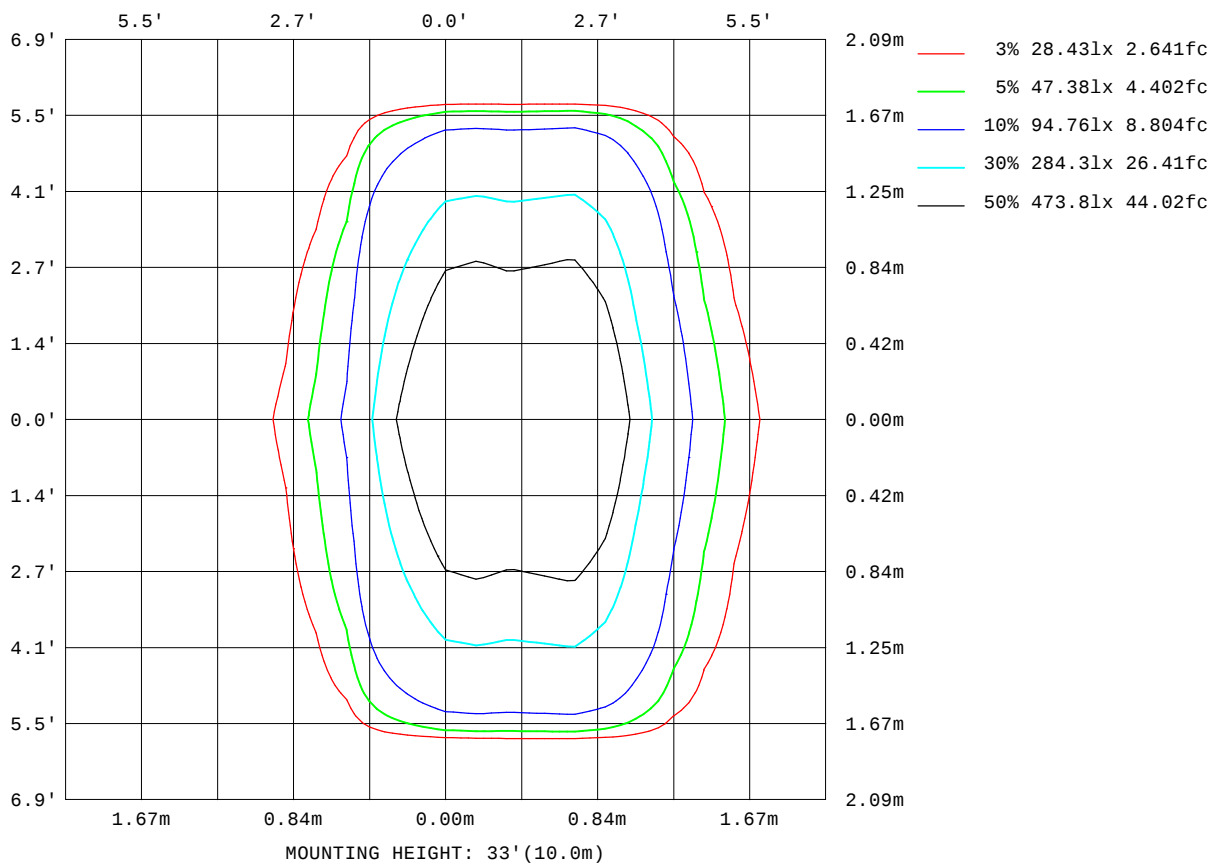

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

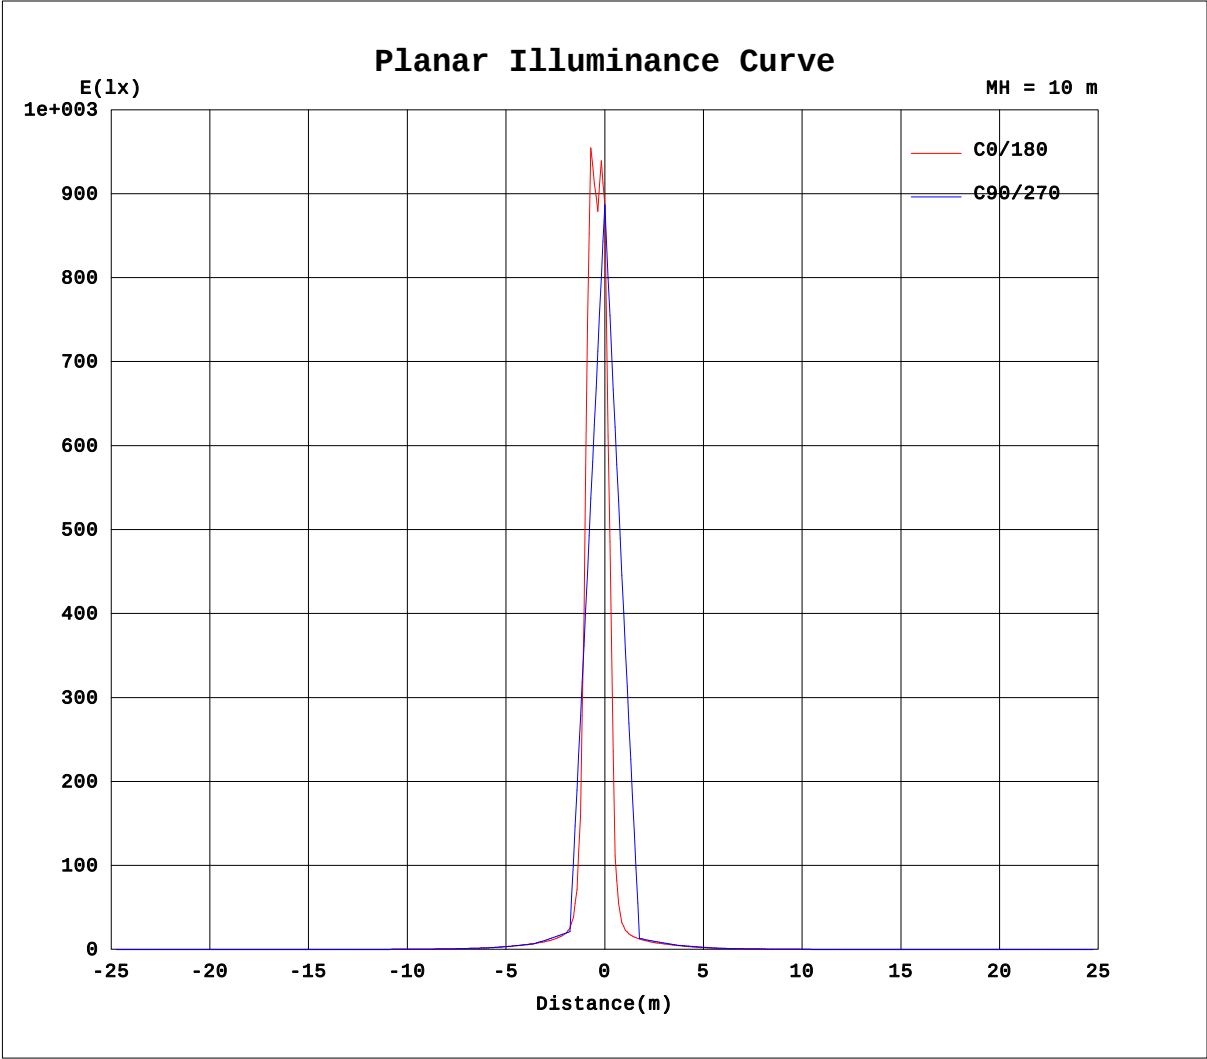


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.7V I:0.2735A P:38.77W PF:1.000 Freq:50.00Hz Lamp Flux:3393.64x1 lm		
NAME: 8.03.012.0129 5° SP-EA-R225A-12P-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

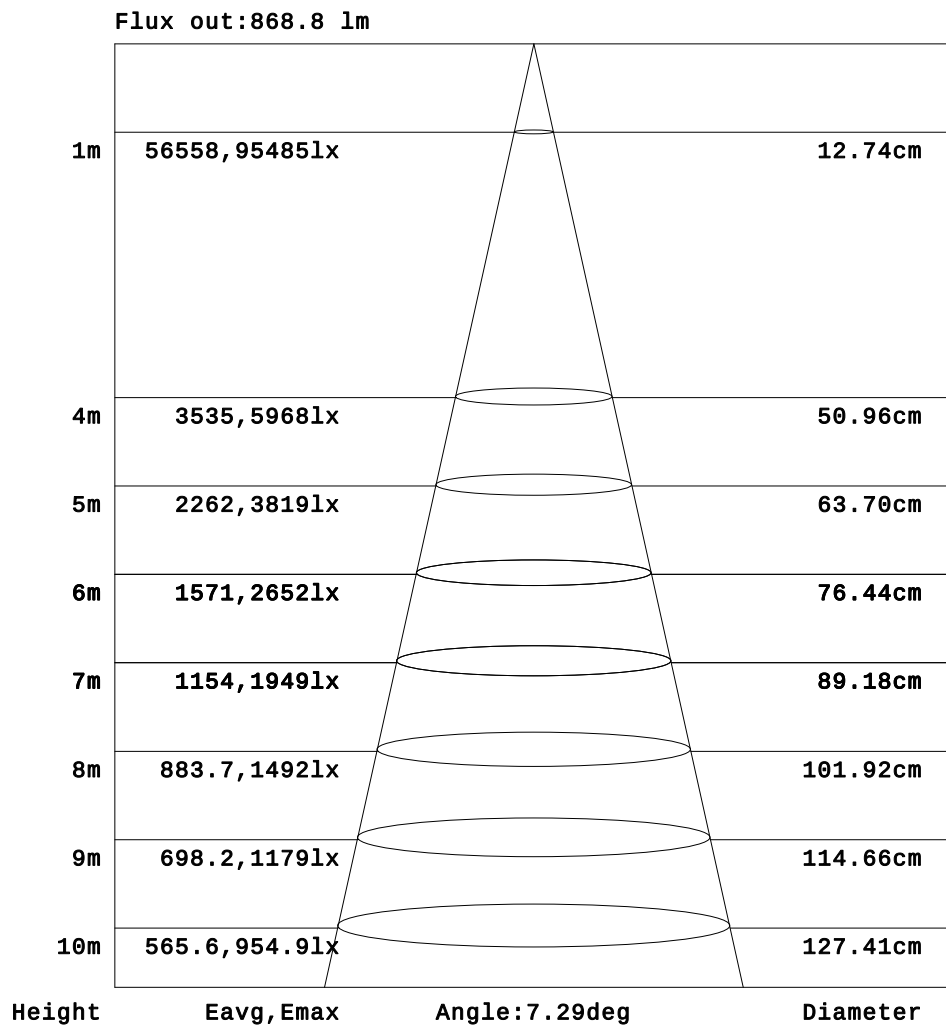

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.7V I:0.2735A P:38.77W PF:1.000 Freq:50.00Hz Lamp Flux:3393.64x1 lm		
NAME: 8.03.012.0129 5° SP-EA-R225A-12P-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: ×10cd			
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.19	0.34	0.49	0.63	0.72	0.79	0.83	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.37	0.68	0.98	1.25	1.45	1.57	1.66	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.23	0.58	0.92	1.29	1.79	2.29	2.71	3.08	3.35	3.54	3.69	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.46	1.16	1.84	2.53	3.21	3.91	4.45	4.91	5.25	5.50	5.73	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.60	1.36	2.24	3.14	4.05	4.94	5.76	6.34	6.84	7.28	7.59	7.81	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.25	1.19	2.26	3.31	4.45	5.56	6.67	7.61	8.23	8.78	9.30	9.67	9.90	
-45	0.00	0.00	0.00	0.00	0.00	0.13	0.85	2.01	3.29	4.57	5.91	7.08	8.21	9.48	10.7	11.8	12.7	13.4	13.9	
-40	0.00	0.00	0.00	0.00	0.00	0.26	1.46	2.84	4.33	5.82	7.37	8.60	9.75	11.4	13.1	14.8	16.1	17.2	17.8	
-35	0.00	0.00	0.00	0.00	0.00	0.64	1.97	3.54	5.22	6.86	8.43	10.1	12.1	14.7	17.1	19.7	22.6	25.0	26.5	
-30	0.00	0.00	0.00	0.00	0.00	1.02	2.49	4.25	6.11	7.90	9.48	11.6	14.5	18.0	21.0	24.5	29.2	32.8	35.3	
-25	0.00	0.00	0.00	0.00	0.08	1.33	2.94	4.86	6.91	8.64	10.8	13.6	17.1	21.5	27.7	36.5	46.0	53.9	58.6	
-20	0.00	0.00	0.00	0.00	0.15	1.65	3.39	5.47	7.71	9.38	12.1	15.6	19.7	25.0	34.5	48.4	62.8	75.1	82.0	
-15	0.00	0.00	0.00	0.00	0.26	1.82	3.63	5.82	8.08	9.88	12.9	17.3	21.8	29.8	43.9	62.9	85.1	116	154	
-10	0.00	0.00	0.00	0.00	0.37	1.99	3.87	6.16	8.46	10.4	13.8	19.1	23.9	34.6	53.4	77.5	107	156	227	
-5	0.00	0.00	0.00	0.00	0.41	2.05	3.98	6.26	8.54	10.5	14.1	19.1	24.8	37.0	57.5	83.2	120	241	4548	
0	0.00	0.00	0.00	0.00	0.46	2.12	4.08	6.37	8.63	10.6	14.4	19.1	25.8	39.4	61.5	88.8	133	325	8870	
5	0.00	0.00	0.00	0.00	0.37	1.99	3.93	6.16	8.37	10.3	13.7	18.3	24.2	35.5	54.9	78.8	112	222	4505	
10	0.00	0.00	0.00	0.00	0.28	1.87	3.78	5.96	8.10	10.0	13.1	17.5	22.6	31.7	48.2	68.8	91.7	118	141	
15	0.00	0.00	0.00	0.00	0.15	1.66	3.49	5.54	7.64	9.47	12.1	15.9	20.4	27.1	38.6	54.0	71.0	88.8	103	
20	0.00	0.00	0.00	0.00	0.01	1.46	3.20	5.11	7.18	8.93	11.2	14.4	18.2	22.5	29.0	39.2	50.3	59.4	65.5	
25	0.00	0.00	0.00	0.00	0.01	1.11	2.70	4.48	6.39	8.19	10.1	12.4	15.5	19.0	23.5	30.0	36.9	42.6	46.4	
30	0.00	0.00	0.00	0.00	0.00	0.75	2.21	3.85	5.60	7.44	8.97	10.4	12.7	15.4	18.0	20.8	23.4	25.8	27.3	
35	0.00	0.00	0.00	0.00	0.00	0.38	1.67	3.11	4.63	6.24	7.79	9.13	10.7	12.7	14.7	16.7	18.7	20.4	21.3	
40	0.00	0.00	0.00	0.00	0.00	0.01	1.14	2.38	3.66	5.04	6.61	7.87	8.83	9.94	11.4	12.6	14.0	14.9	15.3	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.57	1.61	2.70	3.85	5.13	6.29	7.25	8.25	9.36	10.3	11.3	11.9	12.1	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.85	1.74	2.66	3.64	4.70	5.68	6.55	7.35	8.00	8.59	8.82	8.90	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.42	0.90	1.65	2.42	3.24	4.05	4.74	5.36	5.89	6.37	6.65	6.79	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.64	1.20	1.77	2.42	2.93	3.37	3.79	4.16	4.48	4.67	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.32	0.60	0.89	1.21	1.46	1.80	2.13	2.41	2.64	2.77	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.23	0.46	0.65	0.79	0.86	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.23	0.32	0.40	0.43	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.7V I:0.2735A P:38.77W PF:1.000 Freq:50.00Hz Lamp Flux:3393.64x1 lm		
NAME: 8.03.012.0129 5° SP-EA-R225A-12P-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: ×10cd		
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.85	0.85	0.80	0.75	0.66	0.55	0.43	0.28	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	1.71	1.69	1.60	1.49	1.33	1.11	0.86	0.55	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	3.74	3.70	3.56	3.35	3.05	2.67	2.26	1.79	1.29	0.86	0.50	0.16	0.00	0.00	0.00	0.00	0.00	0.00	
-60	5.76	5.71	5.52	5.21	4.77	4.22	3.66	3.03	2.41	1.72	1.00	0.33	0.00	0.00	0.00	0.00	0.00	0.00	
-55	7.83	7.78	7.52	7.14	6.71	6.12	5.43	4.55	3.70	2.82	1.88	1.03	0.38	0.00	0.00	0.00	0.00	0.00	
-50	9.89	9.84	9.52	9.06	8.65	8.02	7.20	6.07	4.99	3.92	2.77	1.73	0.77	0.00	0.00	0.00	0.00	0.00	
-45	13.9	13.6	12.9	12.1	11.1	9.84	8.64	7.36	6.22	4.96	3.64	2.37	1.25	0.27	0.00	0.00	0.00	0.00	
-40	17.8	17.4	16.4	15.1	13.6	11.7	10.1	8.65	7.45	6.00	4.50	3.01	1.73	0.55	0.00	0.00	0.00	0.00	
-35	26.6	25.1	22.5	19.9	17.2	14.7	12.3	10.2	8.43	6.99	5.34	3.64	2.18	0.88	0.00	0.00	0.00	0.00	
-30	35.3	32.9	28.7	24.6	20.7	17.8	14.6	11.8	9.41	7.98	6.17	4.28	2.64	1.20	0.00	0.00	0.00	0.00	
-25	58.5	53.6	45.4	36.2	27.3	21.3	16.9	13.5	10.5	8.52	6.83	4.77	2.98	1.42	0.08	0.00	0.00	0.00	
-20	81.8	74.3	62.1	47.9	33.9	24.8	19.3	15.2	11.6	9.07	7.48	5.26	3.31	1.63	0.15	0.00	0.00	0.00	
-15	158	114	84.1	62.5	43.5	29.4	21.3	16.4	12.6	9.56	7.80	5.62	3.60	1.82	0.27	0.00	0.00	0.00	
-10	233	153	106	77.1	53.1	34.1	23.2	17.7	13.5	10.1	8.13	5.99	3.88	2.01	0.39	0.00	0.00	0.00	
-5	3911	212	117	82.0	56.0	35.9	24.0	18.1	13.7	10.2	8.15	6.06	3.96	2.03	0.40	0.00	0.00	0.00	
0	7588	270	129	86.9	58.9	37.7	24.9	18.5	13.9	10.4	8.17	6.14	4.05	2.05	0.40	0.00	0.00	0.00	
5	3864	194	110	78.0	53.6	34.5	23.6	17.9	13.5	10.2	8.08	6.04	3.98	1.99	0.36	0.00	0.00	0.00	
10	141	118	91.8	69.1	48.4	31.4	22.4	17.3	13.2	9.97	8.00	5.94	3.91	1.94	0.33	0.00	0.00	0.00	
15	103	88.5	70.9	54.1	38.9	27.0	20.4	16.0	12.1	9.49	7.63	5.56	3.59	1.72	0.20	0.00	0.00	0.00	
20	65.8	59.4	50.1	39.1	29.4	22.7	18.4	14.6	11.1	9.02	7.27	5.18	3.27	1.50	0.08	0.00	0.00	0.00	
25	46.8	42.7	36.8	30.1	24.1	19.4	15.9	12.8	10.2	8.43	6.61	4.65	2.86	1.25	0.04	0.00	0.00	0.00	
30	27.7	26.0	23.5	21.1	18.9	16.0	13.4	10.9	9.21	7.85	5.95	4.11	2.46	1.01	0.00	0.00	0.00	0.00	
35	21.5	20.4	18.8	17.0	15.3	13.2	11.4	9.61	8.17	6.74	5.04	3.42	1.98	0.67	0.00	0.00	0.00	0.00	
40	15.2	14.7	14.0	13.0	11.7	10.4	9.29	8.26	7.13	5.64	4.14	2.74	1.49	0.33	0.00	0.00	0.00	0.00	
45	12.0	11.7	11.3	10.6	9.74	8.77	7.78	6.81	5.77	4.48	3.25	2.07	1.00	0.17	0.00	0.00	0.00	0.00	
50	8.83	8.73	8.53	8.22	7.79	7.09	6.28	5.36	4.40	3.33	2.36	1.41	0.52	0.00	0.00	0.00	0.00	0.00	
55	6.77	6.69	6.49	6.17	5.78	5.22	4.58	3.87	3.09	2.26	1.49	0.73	0.26	0.00	0.00	0.00	0.00	0.00	
60	4.72	4.65	4.45	4.13	3.78	3.36	2.89	2.37	1.78	1.18	0.63	0.05	0.00	0.00	0.00	0.00	0.00	0.00	
65	2.79	2.76	2.65	2.44	2.22	1.91	1.55	1.18	0.89	0.59	0.31	0.03	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.87	0.87	0.84	0.76	0.67	0.46	0.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.43	0.44	0.42	0.38	0.33	0.23	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-23

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: