


LED Test Report

Product Mark

Product Type :LLS-OP-W30B-L6-DIM
Temperature :qc1'C
Operator :qc1
Remark:8.02.019.0097 60° LLS-OP-W30B-L6-DIM

Manufacturer :TPK
Humidity :65%
Test Date :2024-09-21 09:11:35

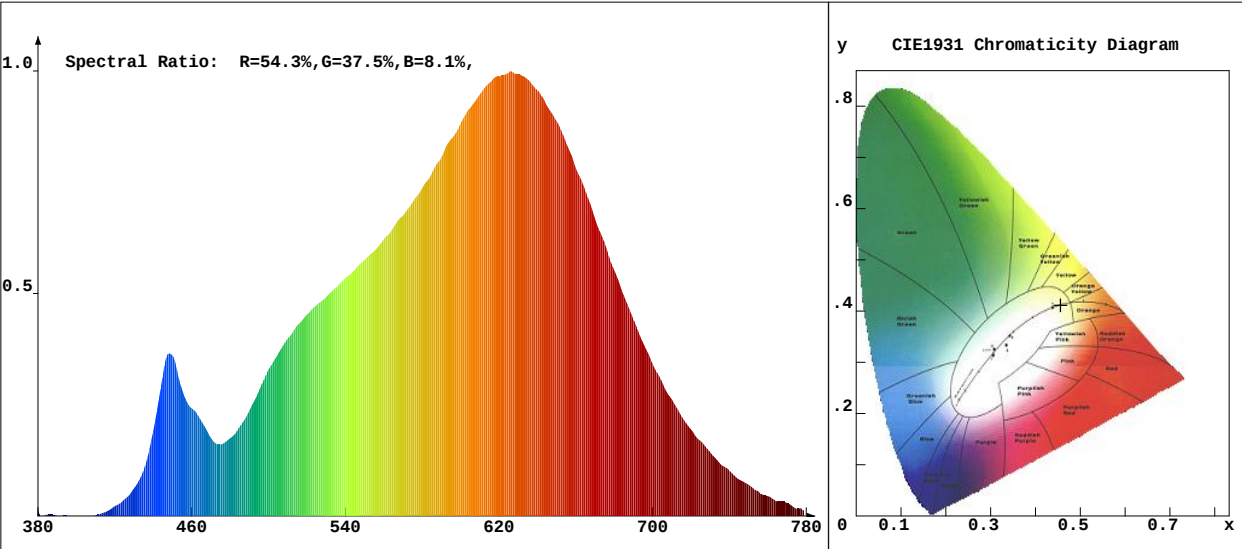

Chroma Parameters

Chro.Coor.:x=0.4561 y=0.4116 u=0.2596 v=0.3514 duv=0.0007
CCT: 2761K Dominant Wave.:583.7nm Purity:60.4%
Flux RGB Ratio:R=26.0%,G=72.7%,B=1.4% Peak Wave:625.7nm Half Width:152.9nm

Rendering Index:Ra= 93.8

R1 =94	R2 =96	R3 =98	R4 =95	R5 =94	R6 =96	R7 =94	R8 =84
R9 =64	R10=91	R11=96	R12=86	R13=95	R14=98	R15=90	

Photo Parameters

Flux:517.54lm Effi.:47.3lm/W Radiant:1683.3mW Iv:0.0mcd
Efficiency:0.241 Effi Level:B (EU 874-2012)

Ele. Parameters

Voltage:U=219.800V Current:I=0.0920A
Power:P=10.93W Power Factor:PF=0.537

Instrument state

Instrument:Hopoo HP8000S	Integral Time: 315.666ms	VPeak: 13913
VDark: 1249	Scan Range: 380-780nm	Product ID: 201605038