

LED Test Report

Product Mark

Product Type :SP-PZT-R135-6P-RDM-W

Manufacturer :TPK

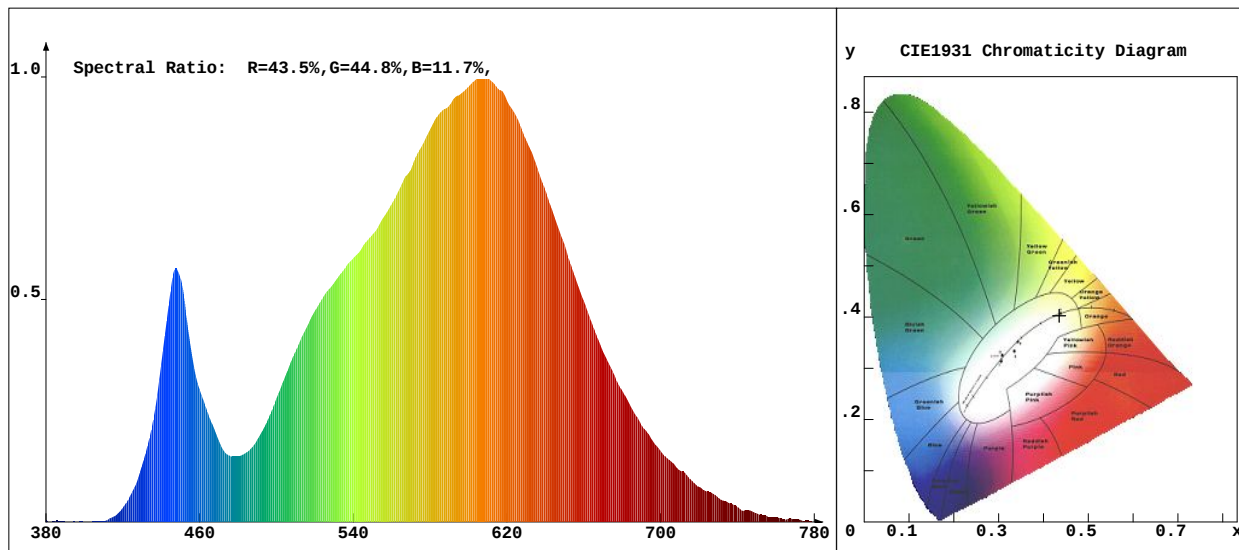
Temperature :22.5'C

Humidity :42%

Operator :qc1

Test Date :2025-07-31 16:30:47

Remark:8.03.035.0003 45° SP-PZT-R135-6P-RDM-W

**Chroma Parameters**

Chro.Coord.:x=0.4355 y=0.4026 u=0.2503 v=0.3471 duv=-0.0004

CCT: 3012K Dominant Wave.:582.9nm Purity:51.6%

Flux RGB Ratio:R=22.8%,G=75.8%,B=1.4% Peak Wave:608.7nm Half Width:136.0nm

Rendering Index:Ra= 81.8

R1 =80 R2 =88 R3 =95 R4 =81 R5 =80 R6 =85 R7 =85 R8 =62

R9 =11 R10=72 R11=79 R12=66 R13=82 R14=97 R15=74

Photo Parameters

Flux:366.92lm

Effi.:41.7lm/W

Radiant:1214.3mW

Iv:0.0mcd

Efficiency:0.253

Effi Level:B (EU 874-2012)

Ele. Parameters

Voltage:U=120.400V

Current:I=0.1340A

Power:P=8.80W

Power Factor:PF=0.542

Instrument state

Instrument:Hopoo HP8000S

Integral Time: 423.327ms

VPeak: 16383

VDark: 1409

Scan Range: 380-780nm

Product ID: 201605038