


LED Test Report

Product Mark

Product Type :LLS-OP-W30A-L3-RDM(AL)-W Manufacturer :TPK
Temperature :27.2'C Humidity :65%
Operator :qc1 Test Date :2024-08-16 13:43:44
Remark:8.02.019.0090 LLS-OP-W30A-L3-RDM(AL)-W

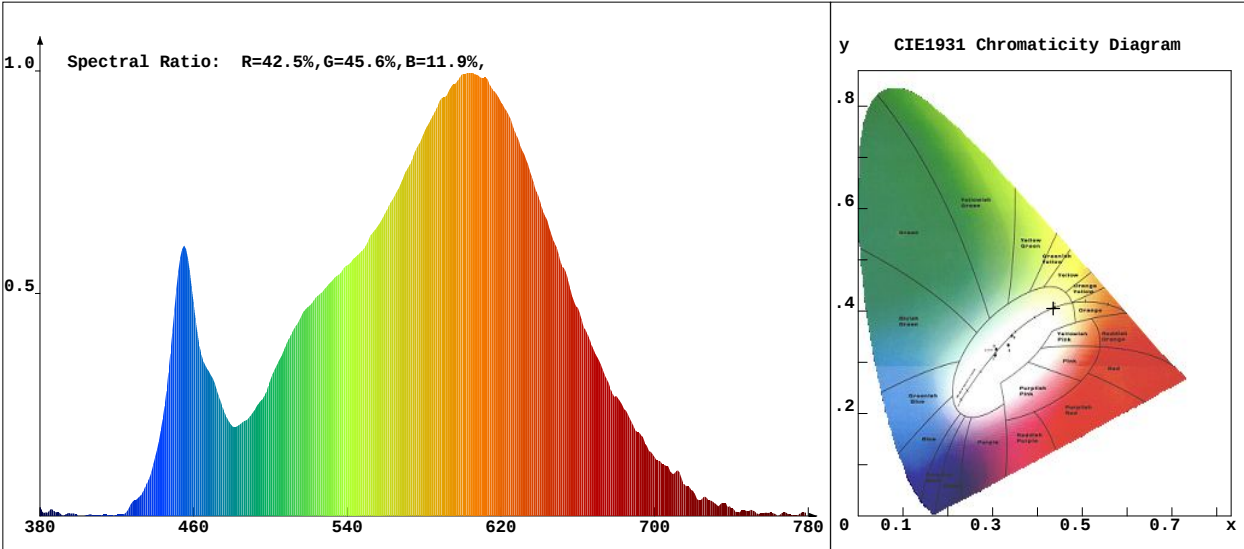

Chroma Parameters

Chro.Coor.:x=0.4356 y=0.4055 u=0.2491 v=0.3478 duv=0.0008
CCT: 3034K Dominant Wave.:582.4nm Purity:52.5%
Flux RGB Ratio:R=22.8%,G=75.4%,B=1.7% Peak Wave:604.8nm Half Width:129.9nm

Rendering Index:Ra= 83.4

R1 =82	R2 =92	R3 =96	R4 =81	R5 =82	R6 =90	R7 =83	R8 =61
R9 =11	R10=81	R11=80	R12=68	R13=85	R14=99	R15=75	

Photo Parameters

Flux:57.16lm Effi.:21.3lm/W Radiant:177.5mW Iv:0.0mcd
Efficiency:0.285 Effi Level:B (EU 874-2012)

Ele. Parameters

Voltage:U=119.200V Current:I=0.0450A
Power:P=2.69W Power Factor:PF=0.500

Instrument state

Instrument:Hopoo HP8000S	Integral Time: 1000.000ms	VPeak: 6745
VDark: 1459	Scan Range: 380-780nm	Product ID: 201605038