


LED Test Report

Product Mark

Product Type :LLS-OP-W30A-L3-RDM(AL) Manufacturer :TPK
Temperature :27.2'C Humidity :65%
Operator :qc1 Test Date :2024-08-16 13:46:33
Remark:8.02.019.0090 LLS-OP-W30A-L3-RDM(AL)

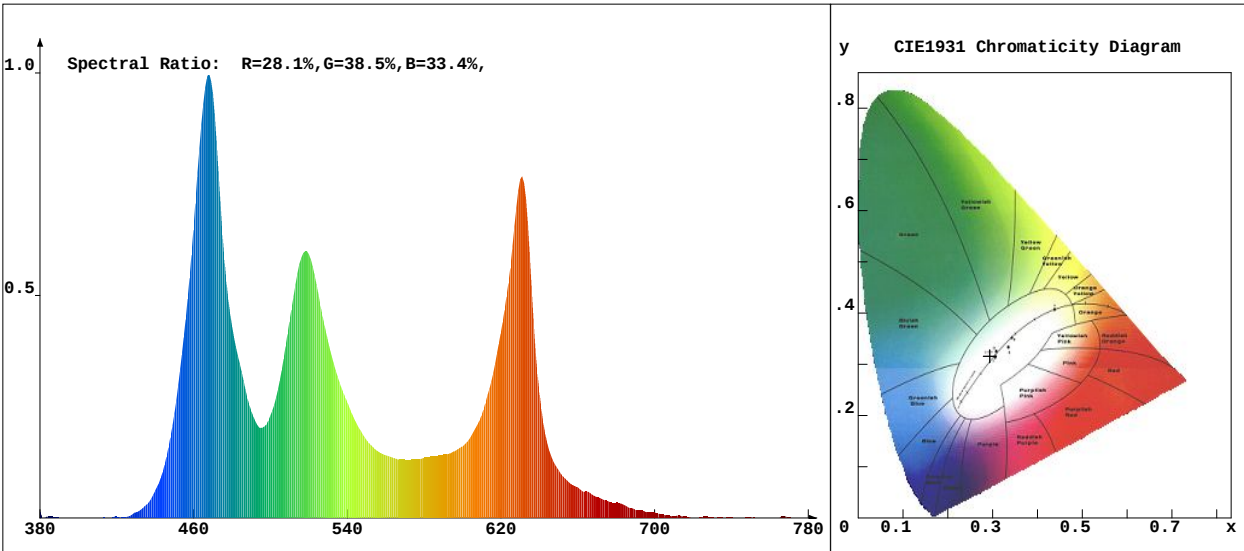

Chroma Parameters

Chro.Coord.:x=0.2939 y=0.3162 u=0.1894 v=0.3057 duv=0.0066
CCT: 7838K Dominant Wave.:486.0nm Purity:14.7%
Flux RGB Ratio:R=20.9%,G=71.5%,B=7.6% Peak Wave:467.9nm Half Width:20.8nm

Rendering Index:Ra= 61.9

R1 =52	R2 =69	R3 =81	R4 =62	R5 =63	R6 =62	R7 =69	R8 =38
R9 =-73	R10=28	R11=56	R12=62	R13=53	R14=87	R15=45	

Photo Parameters

Flux:146.38lm Effi.:22.4lm/W Radiant:578.3mW Iv:0.0mcd
Efficiency:0.366 Effi Level:B (EU 874-2012)

Ele. Parameters

Voltage:U=277.200V Current:I=0.0470A
Power:P=6.53W Power Factor:PF=0.501

Instrument state

Instrument:Hopoo HP8000S	Integral Time: 295.782ms	VPeak: 13673
VDark: 1096	Scan Range: 380-780nm	Product ID: 201605038