

LED Test Report

Product Mark

Product Type :LLS-OP-W30B-L3-DIM

Manufacturer :TPK

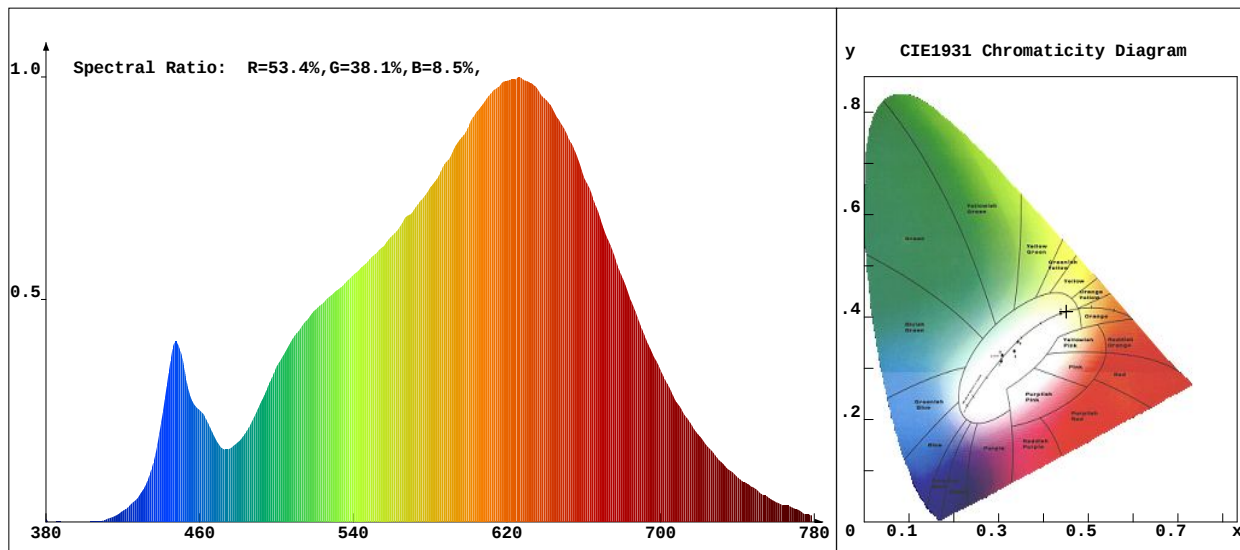
Temperature :qc1'C

Humidity :65%

Operator :qc1

Test Date :2025-01-07 13:54:34

Remark:8.02.019.0106 LLS-OP-W30B-L3-DIM

**Chroma Parameters**

Chro.Coar.:x=0.4511 y=0.4110 u=0.2567 v=0.3508 duv=0.0010

CCT: 2830K Dominant Wave.:583.3nm Purity:58.8%

Flux RGB Ratio:R=25.4%,G=73.2%,B=1.4% Peak Wave:626.7nm Half Width:158.5nm

Rendering Index:Ra= 93.6

R1 =94 R2 =96 R3 =97 R4 =95 R5 =94 R6 =96 R7 =94 R8 =84

R9 =64 R10=90 R11=96 R12=85 R13=94 R14=98 R15=90

Photo Parameters

Flux:357.92lm

Effi.:58.0lm/W

Radiant:1435.8mW

Iv:0.0mcd

Efficiency:0.180

Effi Level:A (EU 874-2012)

Ele. Parameters

Voltage:U=220.300V

Current:I=0.0520A

Power:P=6.17W

Power Factor:PF=0.531

Instrument state

Instrument:Hopoo HP8000S

Integral Time: 382.256ms

VPeak: 14217

VDark: 1321

Scan Range: 380-780nm

Product ID: 201605038