

LED Test Report

Product Mark

Product Type :SP-PZT-R135-6P-RDM-G

Manufacturer :TPK

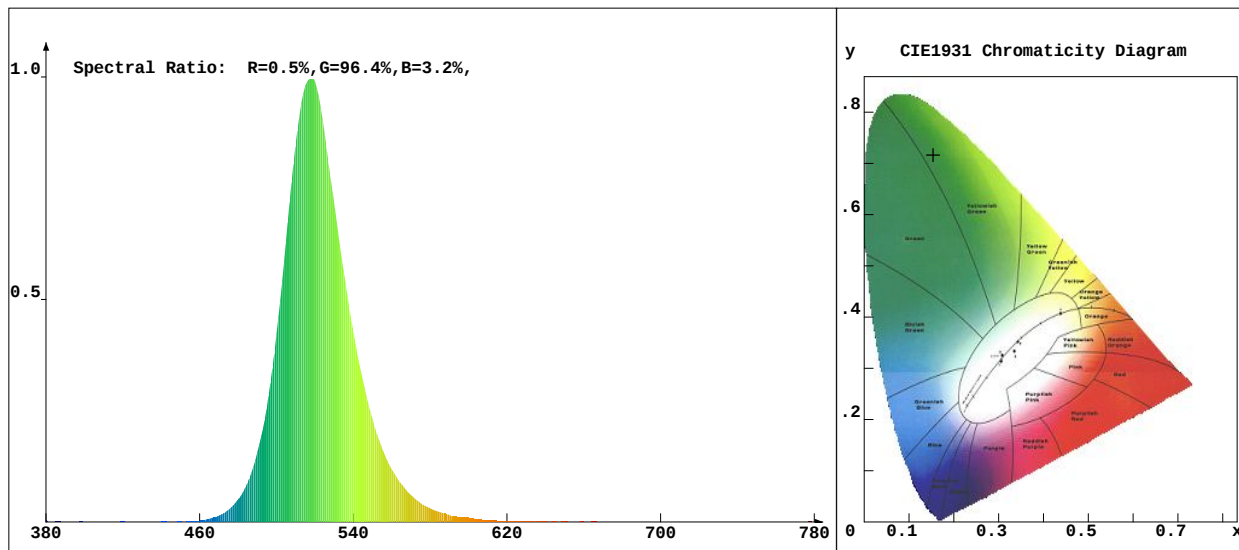
Temperature :22.5'C

Humidity :42%

Operator :qc1

Test Date :2025-07-31 16:01:32

Remark:8.03.035.0004 10° SP-PZT-R135-6P-RDM-G

**Chroma Parameters**

Chro.Coord.:x=0.1538 y=0.7168 u=0.0545 v=0.3808 duv=0.1610

CCT: 8207K Dominant Wave.:523.3nm Purity:77.1%

Flux RGB Ratio:R=0.2%,G=99.1%,B=0.7% Peak Wave:517.8nm Half Width:35.1nm

Rendering Index:Ra=-22.9

R1 =-32 R2 =-8 R3 =-24 R4 =-70 R5 =-12 R6 =-12 R7 =0 R8 =-26

R9 =-355 R10=-102 R11=-96 R12=-26 R13=-39 R14=38 R15=-31

Photo Parameters

Flux:390.71lm

Effi.:44.3lm/W

Radiant:836.0mW

Iv:0.0mcd

Efficiency:0.241

Effi Level:B (EU 874-2012)

Ele. Parameters

Voltage:U=120.300V

Current:I=0.1330A

Power:P=8.81W

Power Factor:PF=0.547

Instrument state

Instrument:Hopoo HP8000S

Integral Time: 119.652ms

VPeak: 14761

VDark: 1274

Scan Range: 380-780nm

Product ID: 201605038