

LED Test Report

Product Mark

Product Type :SP-PZT-R135-6P-RDM-W

Manufacturer :TPK

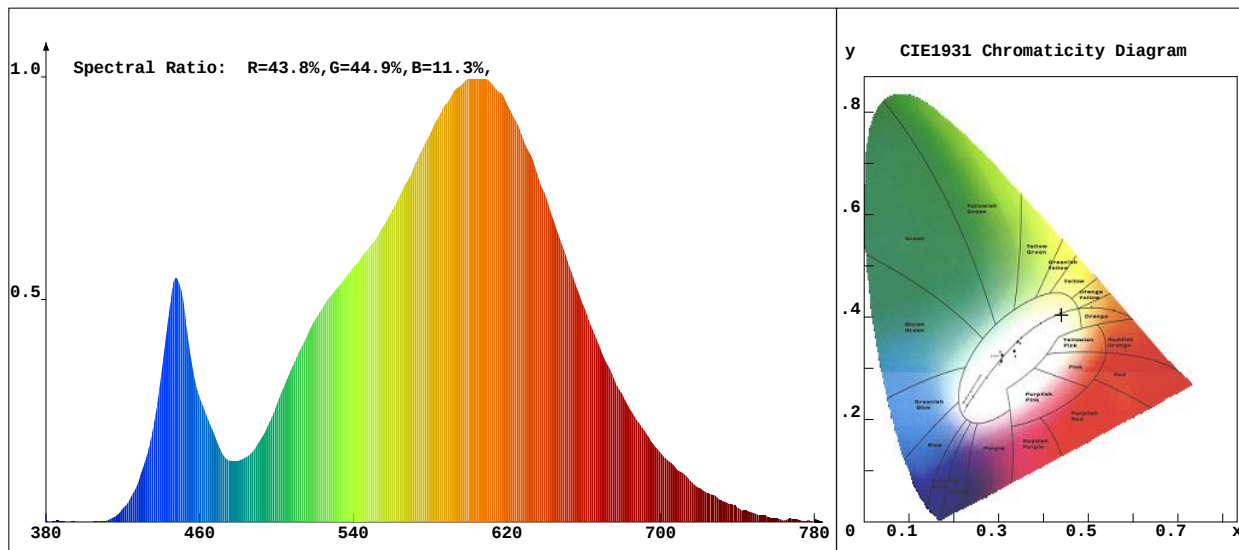
Temperature :22.5'C

Humidity :42%

Operator :qc1

Test Date :2025-07-31 16:03:52

Remark:8.03.035.0004 10° SP-PZT-R135-6P-RDM-W

**Chroma Parameters**

Chro.Coar.:x=0.4406 y=0.4041 u=0.2529 v=0.3480 duv=-0.0005

CCT: 2939K Dominant Wave.:583.2nm Purity:53.6%

Flux RGB Ratio:R=23.1%,G=75.6%,B=1.3% Peak Wave:603.8nm Half Width:131.7nm

Rendering Index:Ra= 80.6

R1 =78 R2 =87 R3 =95 R4 =80 R5 =79 R6 =85 R7 =82 R8 =58

R9 =5 R10=71 R11=78 R12=66 R13=80 R14=97 R15=72

Photo Parameters

Flux:403.80lm

Effi.:44.5lm/W

Radiant:1139.8mW

Iv:0.0mcd

Efficiency:0.242

Effi Level:B (EU 874-2012)

Ele. Parameters

Voltage:U=120.300V

Current:I=0.1370A

Power:P=9.08W

Power Factor:PF=0.549

Instrument state

Instrument:Hopoo HP8000S

Integral Time: 390.976ms

VPeak: 14985

VDark: 1338

Scan Range: 380-780nm

Product ID: 201605038