

LED Test Report

Product Mark

Product Type :SP-PZT-R135-6P-RDM-W

Manufacturer :TPK


Temperature :22.5'C

Humidity :42%

Operator :qc1

Test Date :2025-07-31 16:16:24

Remark:8.03.035.0004 10° SP-PZT-R135-6P-RDM-W

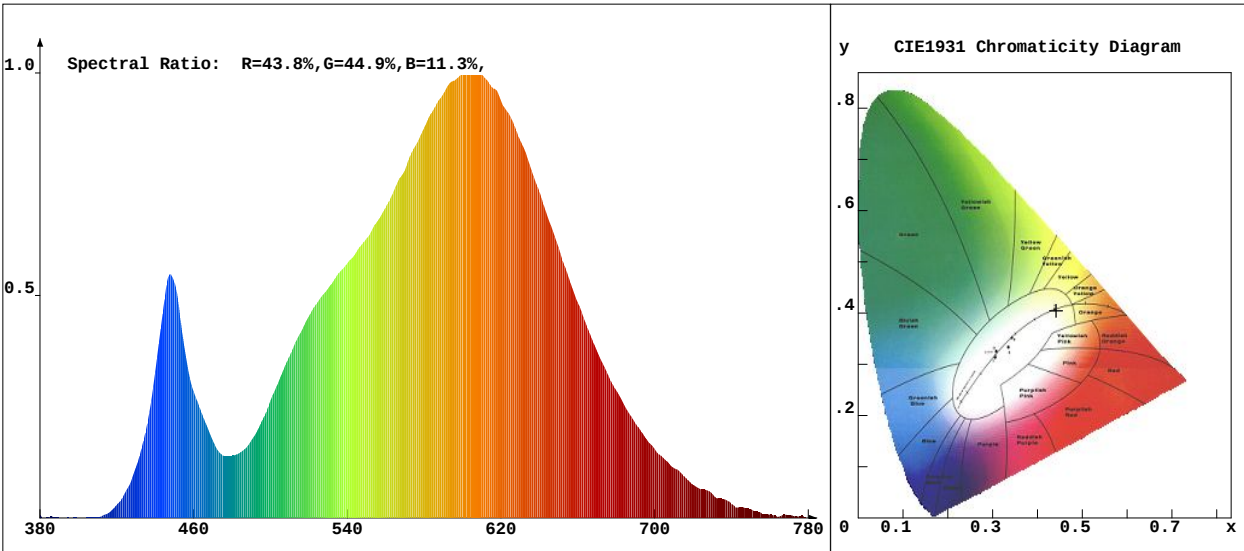

Chroma Parameters

Chro.Coar.:x=0.4415 y=0.4047 u=0.2533 v=0.3482 duv=-0.0004

CCT: 2929K Dominant Wave.:583.3nm Purity:54.0%

Flux RGB Ratio:R=23.0%,G=75.6%,B=1.3% Peak Wave:608.7nm Half Width:131.1nm

Rendering Index:Ra= 79.9

R1 =77	R2 =86	R3 =95	R4 =81	R5 =80	R6 =85	R7 =80	R8 =56
R9 =3	R10=69	R11=79	R12=65	R13=78	R14=96	R15=70	

Photo Parameters

Flux:400.55lm

Effi.:41.6lm/W

Radiant:1130.6mW

Iv:0.0mcd

Efficiency:0.258

Effi Level:B (EU 874-2012)

Ele. Parameters

Voltage:U=277.400V

Current:I=0.0730A

Power:P=9.62W

Power Factor:PF=0.472

Instrument state

Instrument:Hopoo HP8000S

Integral Time: 388.420ms

VPeak: 14985

VDark: 1497

Scan Range: 380-780nm

Product ID: 201605038