

LED Test Report

Product Mark

Product Type :SP-PZT-R110-3P-RDM-G

Manufacturer :TPK

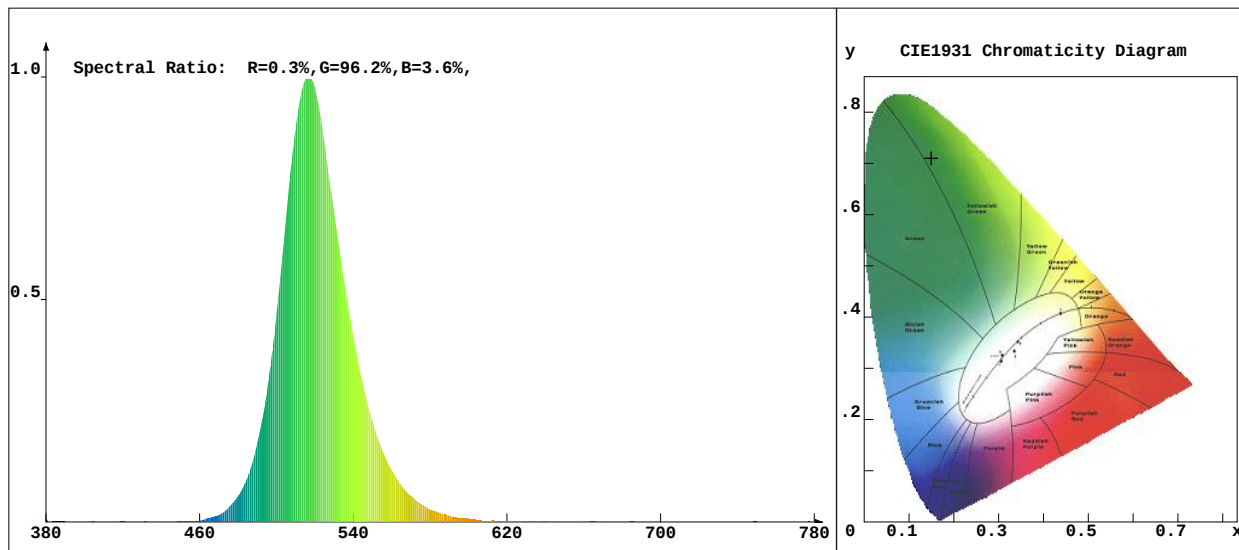
Temperature :22.5'C

Humidity :42%

Operator :qc1

Test Date :2025-08-04 13:47:05

Remark:8.03.036.0004 10° SP-PZT-R110-3P-RDM-G

**Chroma Parameters**

Chro.Coord.:x=0.1495 y=0.7103 u=0.0533 v=0.3797 duv=0.1615

CCT: 8202K Dominant Wave.:521.9nm Purity:75.4%

Flux RGB Ratio:R=0.2%,G=99.0%,B=0.8% Peak Wave:517.8nm Half Width:35.9nm

Rendering Index:Ra=-22.8

R1 =-34 R2 =-5 R3 =-19 R4 =-65 R5 =-11 R6 =-14 R7 =-3 R8 =-30

R9 =-360 R10=-98 R11=-93 R12=-27 R13=-39 R14=40 R15=-32

Photo Parameters

Flux:233.26lm

Effi.:44.6lm/W

Radiant:468.5mW

Iv:0.0mcd

Efficiency:0.210

Effi Level:A (EU 874-2012)

Ele. Parameters

Voltage:U=120.700V

Current:I=0.0810A

Power:P=5.23W

Power Factor:PF=0.534

Instrument state

Instrument:Hopoo HP8000S

Integral Time: 215.887ms

VPeak: 14777

VDark: 1242

Scan Range: 380-780nm

Product ID: 201605038