

LED Test Report

Product Mark

Product Type :SP-PZT-R135-6P-RDM-W

Manufacturer :TPK

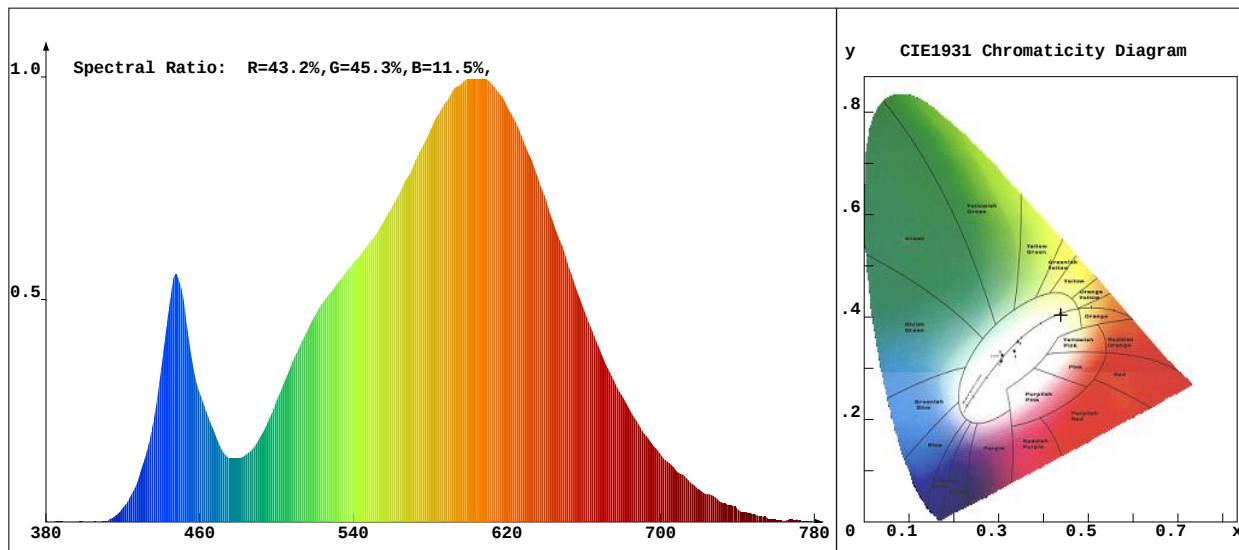
Temperature :22.5'C

Humidity :42%

Operator :qc1

Test Date :2025-07-31 16:37:06

Remark:8.03.035.0003 45° SP-PZT-R135-6P-RDM-W

**Chroma Parameters**

Chro.Coar.:x=0.4390 y=0.4043 u=0.2518 v=0.3478 duv=-0.0002

CCT: 2968K Dominant Wave.:583.0nm Purity:53.1%

Flux RGB Ratio:R=22.8%,G=75.9%,B=1.3% Peak Wave:603.8nm Half Width:132.7nm

Rendering Index:Ra= 80.0

R1 =77 R2 =86 R3 =94 R4 =82 R5 =80 R6 =85 R7 =80 R8 =56

R9 =3 R10=69 R11=80 R12=65 R13=78 R14=96 R15=70

Photo Parameters

Flux:363.89lm

Effi.:38.7lm/W

Radiant:1013.8mW

Iv:0.0mcd

Efficiency:0.272

Effi Level:B (EU 874-2012)

Ele. Parameters

Voltage:U=277.500V

Current:I=0.0720A

Power:P=9.40W

Power Factor:PF=0.469

Instrument state

Instrument:Hopoo HP8000S

Integral Time: 427.623ms

VPeak: 14553

VDark: 1288

Scan Range: 380-780nm

Product ID: 201605038